


## Water-based hard wood flooring sealing systems

For suitability of the individual alternatives for specific substrates (parquet types/wood species) and areas of application, see the respective technical application information.

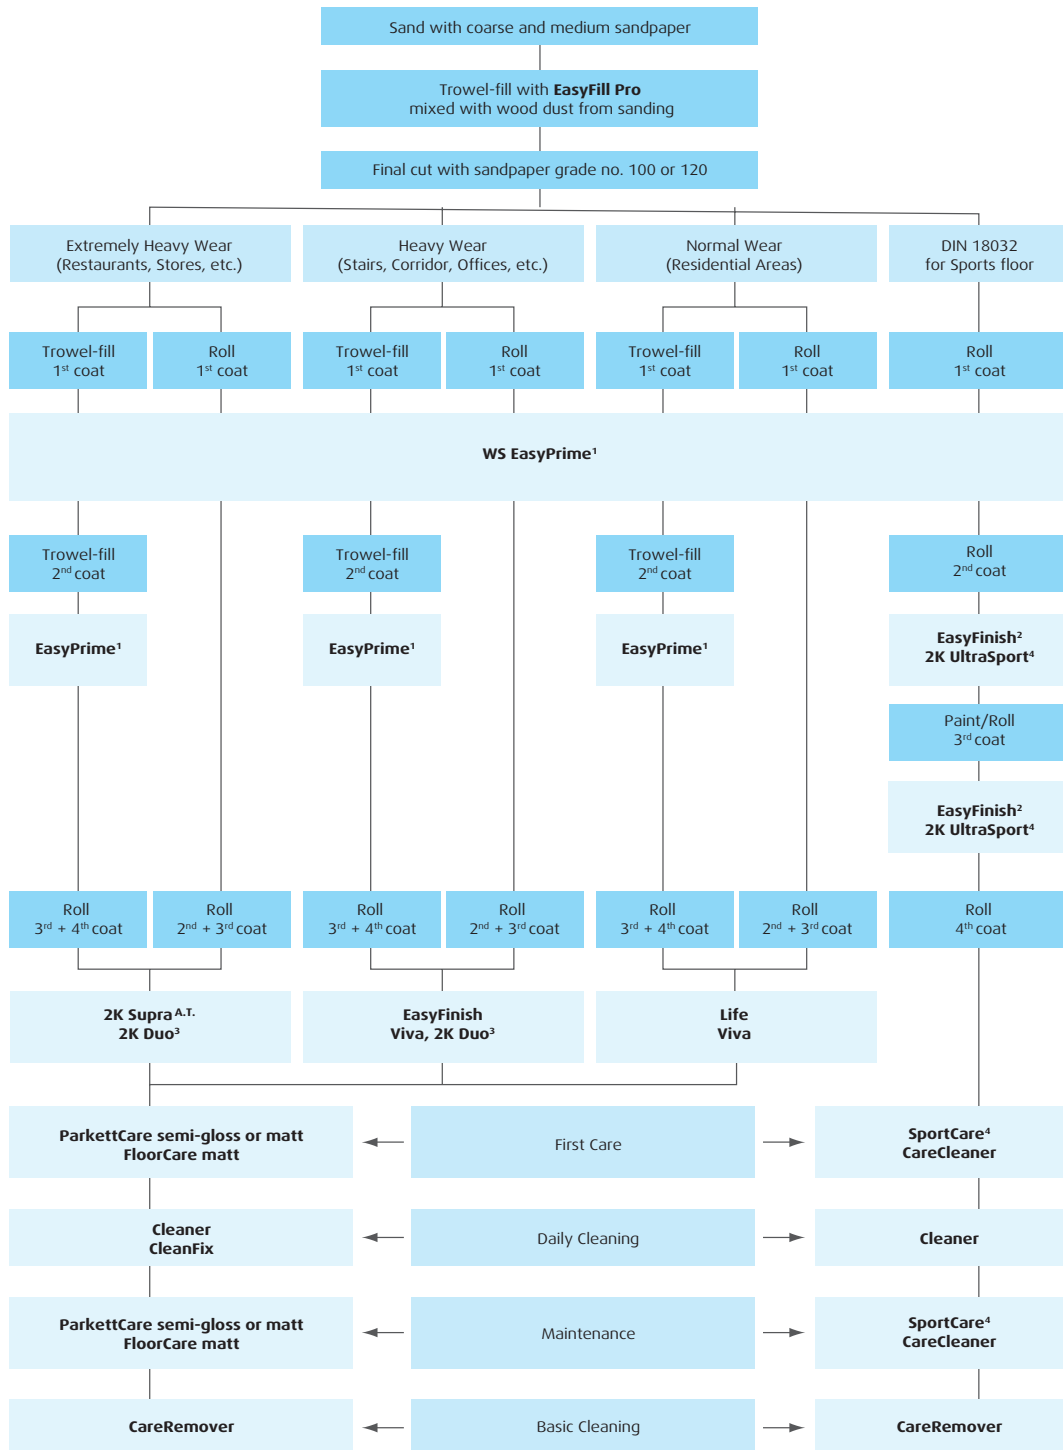

<sup>1</sup> EasyPrime: We recommend the use of this primer to reduce the edge-bonding effect of waterborne coatings. The replacement of the primer by the respective coating system is possible in principle, but may lead to buildup, staining and block bonding.


<sup>2</sup> EasyFinish: To maintain the coefficient of sliding friction according to DIN 18032, care is carried out with LOBA SportCare. Follow the special care instructions!

<sup>3</sup> 2K Duo anti-slip should be used if BGR 181 is required. Follow the special care instructions!

<sup>4</sup> 2K UltraSport: To maintain the coefficient of sliding friction according to DIN 18032 and EN 14904, use LOBA® SportCare. Special Follow the special care instructions!

## Water-based hard wood flooring sealing systems

For suitability of the individual alternatives for specific substrates and areas of application, see the respective technical application information.

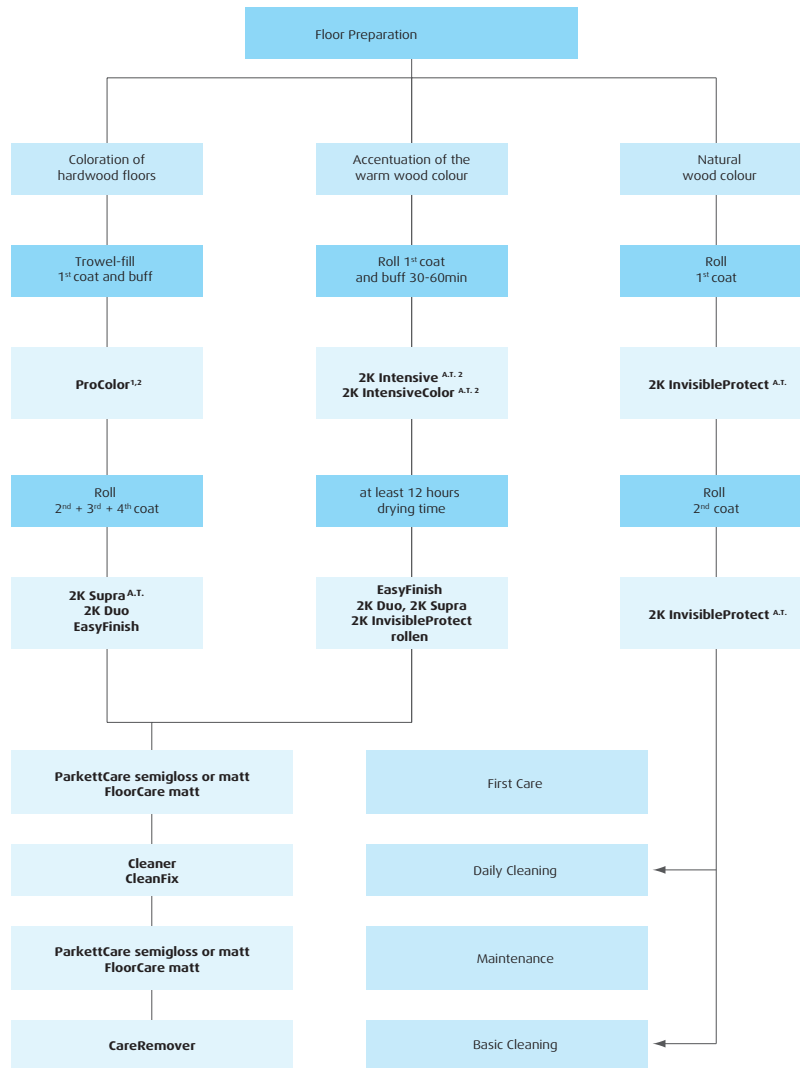

<sup>1</sup> ProColor does not minimize the tendency to edge bonding of waterborne paints.

<sup>2</sup> After application, level with a single-disc machine and the LOBASAND SpecialPad beige.

\* Observe technical information!

For cleaning and care measures, see LOBA Care Instructions.