

Contents

HARDWOOD FLOORS

Joint Fillers	13
Sealers and Coloration	15-17
1K Finishes	20-21
2K Finishes	22-23
Additives	24-25
Special Products	26
UV Finish	26
List of Wood Species for Sealers & Finish Systems	27
Oils	29-30
List of Wood Species for Oil Systems	31

OUTDOORS

Oils	33
Cleaning & Care	34

CLEANING & CARE

Finished Floors	37
Oiled Floors	38

HOME

Cleaning & Care for the Home	41-43
------------------------------	-------

ABRASIVES & PADS

Ceramic	45
Zirconia	46
Aluminum Oxide	47
Other Abrasives & Pads	47

TOOLS & ACCESSORIES

Application Tools	49-50
Range of Use – Rollers	51
Accessories	52

Discover the LOBA Wakol App for North America

Always On-Site. Find answers to your everyday questions quickly.





Play Store

App Store

Use our download area:

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/us_en/downloads







LOBA On Top!

LOBA loves beautiful floors. As a family-run company with a tradition spanning a century, we offer you modern products for the creation, finishing and maintenance of surfaces made of wood and cork, as well as resilient and mineral floorings. LOBA attaches the highest value to user-friendly, safe and sustainable products. Out of responsibility towards people and nature, we have long focused on the development of environmentally compatible, solvent-free systems – for a living environment that makes us all feel good.

You can find all of LOBA's milestones since 1922 here.

ORANGE ZONE

The inaugural issue of the LOBA customer magazine, ORANGE ZONE, will be published in April. Informative and practical, this German-English bilingual magazine provides added value in the areas of news, technology, and service.

2023

2022

2015

2006

100 YEARS LOBA

"Creating the future together" – LOBA celebrates 100 years of technical excellence and innovation, passion, and outstanding service.

LOBA On Top! Produced in Germany - made for the world.

FOUNDING

NEW GROUND

Cool, individual, timeless – minimal industrial style through an exposed concrete look: Market launch of the Factory Line, LOBA's first water-based finish system for leveling compounds.



INVESTMENT IN THE FUTURE

The new logistics and training center in Ditzingen, Germany is opened.

INVISIBLE SURFACE PROTECTION

Market launch of the invisible water-based surface protection 2K InvisibleProtect. Thanks to its innovative technology, it achieves a look and feel that appears even more natural than raw wood.



PARTNERSHIP WITH WAKOL

INNOVATION

With the introduction of the legendary WS 2K 95, the world's first water-based 2K hardwood floor finish system, LOBA sets a new standard in the industry.



The product range includes floor stains, floor cleaners, floor polish, ski wax, shoe polish, leather grease, and household candles. Already in September 1922, 20 candle machines produce 85 tons of household candles.

On April 13, 1922, Wilhelm Hornung and

Wachswarenfabriken AG Hornung und Dr. Fischer in Ditzingen, near Stuttgart,

Dr. Max Fischer found Vereinigte

1922

1995

AILESTONES





Excellent! Sustainability at LOBA

When it comes to sustainability, LOBA solutions are the perfect companion for every step of the process – not just for new-builds, but also and especially in refurbishment projects. At the company level as well, we have set ourselves some lofty goals.

REFURBISH INSTEAD OF USING NEW

Convince your customers to give hardwood flooring a second chance! Old flooring, when restored to a high standard, is often a beautiful alternative to new flooring. It also tells a story, and not infrequently turns out to be the more economical solution. By far, however, it's the more sustainable option: Renovating a hardwood floor conserves resources and is environmentally friendly. It also avoids waste and produces less CO₂ than a complete replacement.

PRODUCTS INSPIRED BY SUSTAINABILITY

As part of our traditional role as a pioneer in the development of water-based 2K finishes, sustainable formulas can be found throughout the range of LOBA finishing products – out of responsibility towards our customers, end users and employees. Numerous labels, such as the coveted GEV-EMICODE®, the French "Emissions dans l'air intérieur" seal, or the Scandinavian "M1" mark, bear testimony to our commitment that extends far beyond national borders.

SUSTAINABLE AND FAIR: OUR DELIVERY PROCESSES

To make sure our suppliers meet our rigorous standards, they agree to our code of conduct, which requires them to understand, follow, and champion our values and principles in environmental protection, social responsibility, and governance. As part of this commitment, we have also dedicated ourselves the United Nations' Sustainable Development Goals.

OUR MISSION

For us at LOBA Wakol North America, our effort focuses on consistently providing a safe, healthy atmosphere for our customers and our employees. We are dedicated to identifying the best processes, products, and packaging, which reduce our carbon footprint and creates a positive environmental impact for all of us now and for future generations. We are a proud member of the U.S. Green Building Council and Green Business Bureau. We will continue to strive each day for a better tomorrow.

LOBA GmbH & Co. KG is ISO-certified





LOBA Wakol North America is member of









A STRONG CONNECTION FOR YOUR SUCCESS

Connected Systems

Perfect results for your projects

Your benefits with LOBA Wakol Connected Systems

- · Perfectly coordinated products
- Maximum safety during application
- Successful handling in a tried-and-tested, guaranteed system
- Exclusion of interactions between oils / finishes and adhesives
- · Avoidance of dark run-ins at short end joints
- · Avoidance of dark joints, since there is no softening of the finish layer
- Long-term quality assurance through regular tests in the event of formula adjustments

We care about your success!




Connected Systems

perfect results for your projects

Your benefits with LOBA and Wakol Connected Systems:

- Outstanding compatible products
- Powerful security for your installation
- · No chemical reaction between finish and adhesive
- · No softening of the finish, prevents dark joints
- Successful application guaranteed in a well proven system

We care about your success!

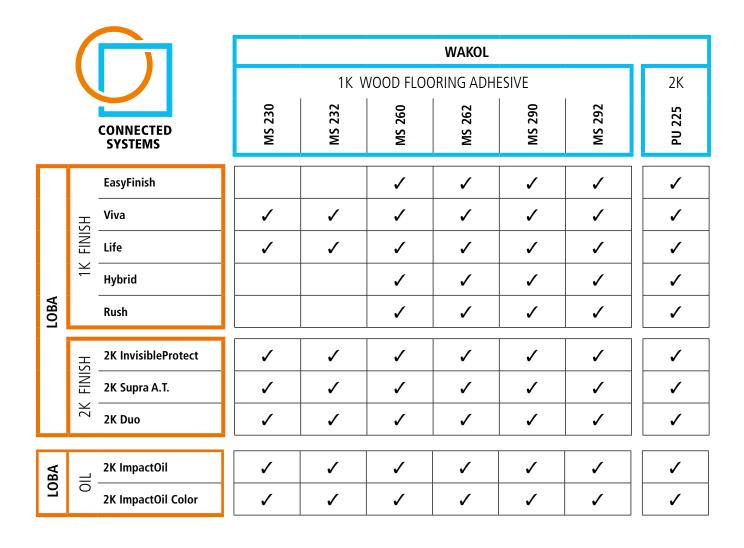





New look, same quality! 1 FILLER 2 SEALER 3 FINISH **2K Duo** SEMI-GLOSS > SATIN EXTRA MATTE shake well 0.91 gal.

MORE INFORMATION, MORE ORIENTATION

Reach your goal even faster – with the new LOBA labels.









The key facts at a glance

The new, user-friendly LOBA label design makes it even easier for you to find the right product.

- · Clear presentation of product features
- Background images show the range of use
- Color coding system for better distinction of the product types





THE RANGE OF USE



THE NEW COLOR CODING SYSTEM

Preparation Sealer Finish Oil/wax Cleaning & care

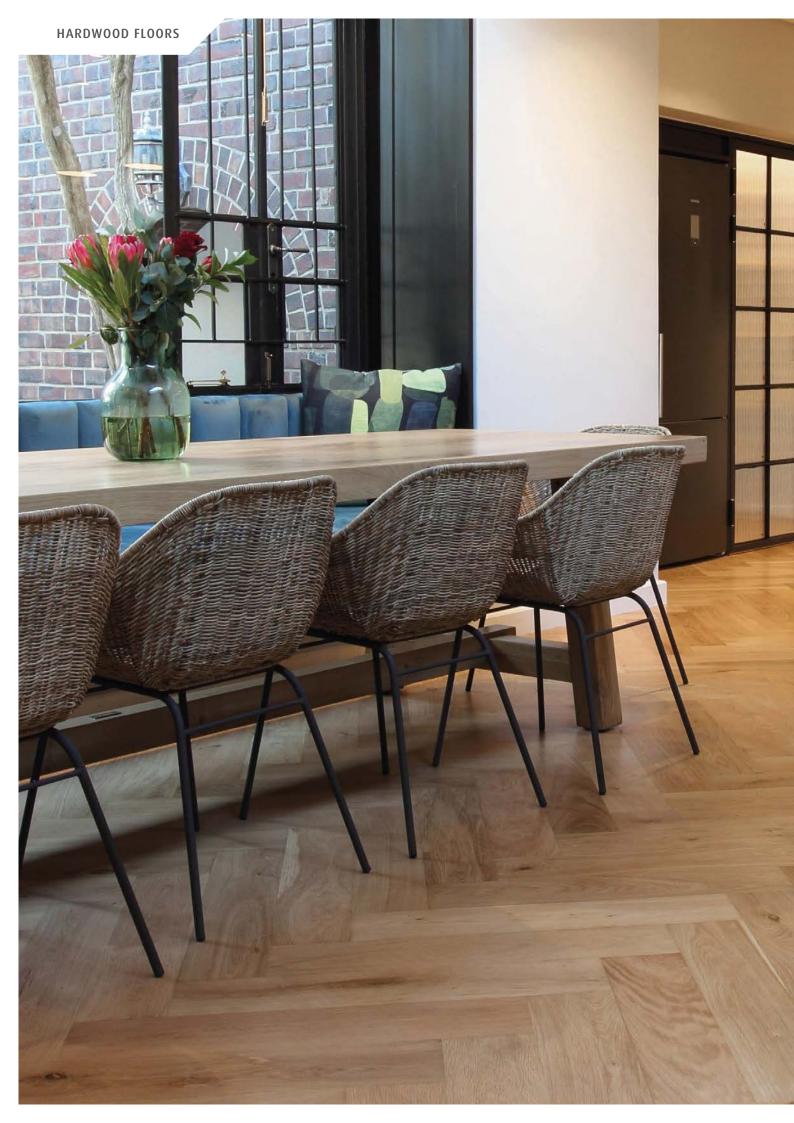

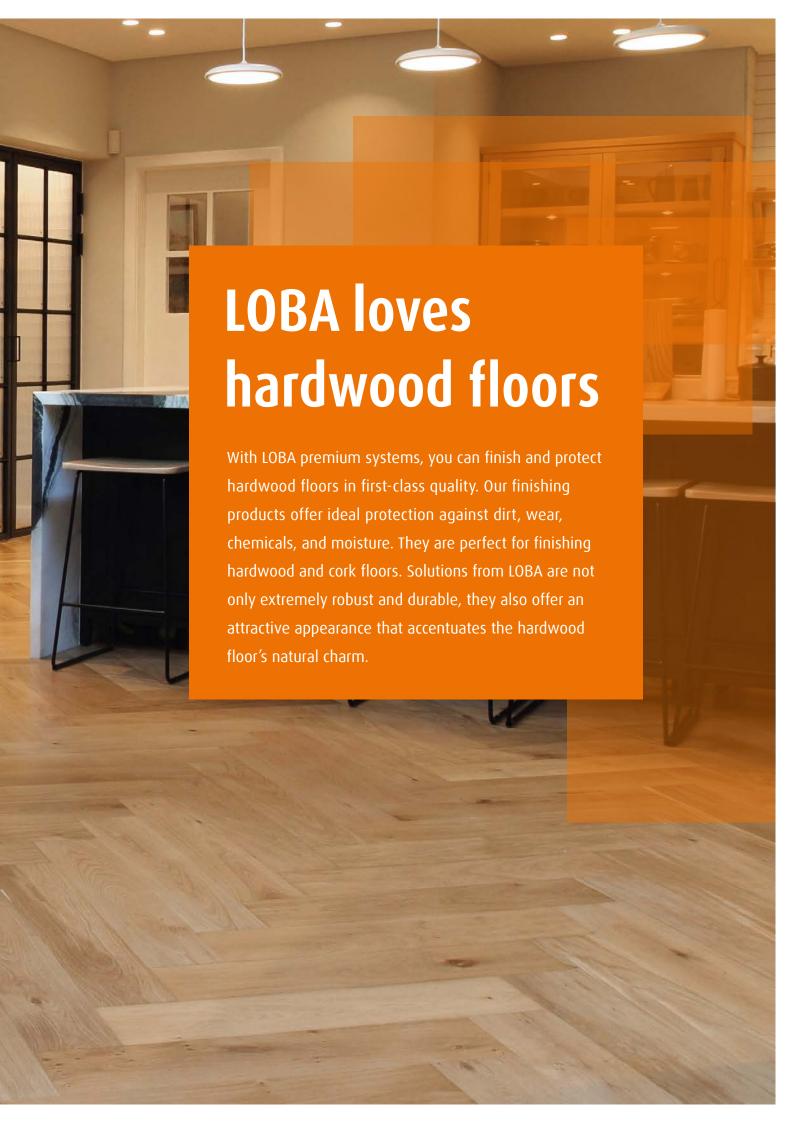






EasyFillFast drying water-based binder designed to be mixed with fine wood dust to create a customized wood filler.

- Excellent coverage
- Fast drying
- No offensive odor
- Easy application Suitable for all types of wood





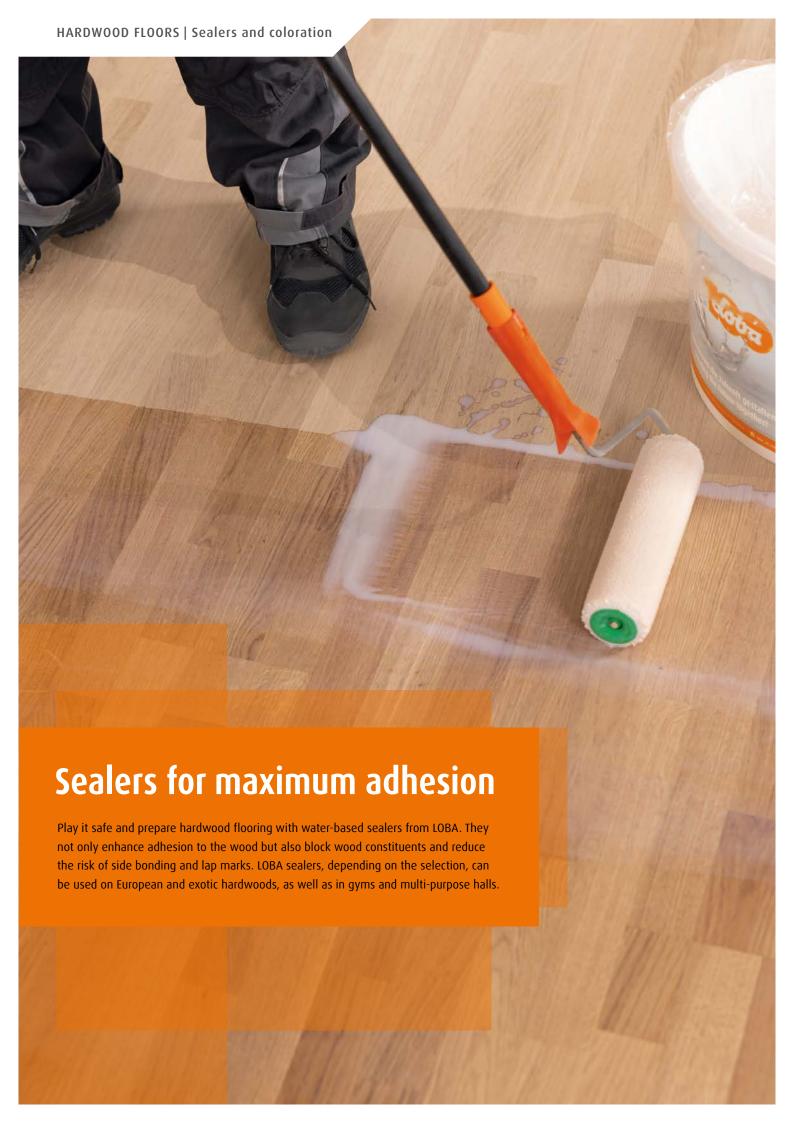



EasyPrime

Polyurethane-acrylate water-based sealer for hardwood flooring.

- No lap marks
- Reduces the side bonding and whiteline-effect tendency of water-based finishes
- · Can be finished with all LOBA water-based finishes
- Suitable for almost all wood species
- · Application on LOBA Stain results in a richer coloration
- Excellent coverage rate

APPLICATION DEVICE Micro 120 Roller T-Bar	sq ft / gal 400 - 500
Wood	
Linear R.	CANADA CA





VivaPrime

Acrylate water-based sealer for hardwood flooring.

- Easy and safe application
- Reduces the side bonding and whiteline-effect tendency of water-based finishes
- · Good price/performance ratio
- Suitable for all light colored North American wood species
- Application on LOBA Stain results in a richer coloration

APPLICATION DEVICE	sq ft / gal
Micro 120 Roller T-Bar	400 - 500
Wood	
Life class of it. III. Side class of it. III. Side class of its Constitution Side Cons	
EMSSIONS DANS L'AIR INTÉRIEUR A A B C	

ITEM-#	Ō		555	US REGULATORY VOC
LO-FI-322	1gal.	4	200	< 165 g/l



2K Intensive

2-Component high-solid oil-based sealer for hardwood flooring.

- · Adds warmth and rich color to wood flooring
- No grain raise
- Combination of an oiled look with the advantages of a sealed surface $% \left(1\right) =\left(1\right) \left(1\right) \left($
- Easy application
- Quick-drying oils allow finishing after 12-hours
- Water-free and low VOC

ITEM-#	VARIANT		6	6-0-0	US REGULATORY VOC
LO-FI-239	Transparent	2.5 kg	4	120	< 69 g/l

APPLICATION DEVICE Micro 60-80 Roller	sq ft / 2.5 kg 540
Wood	





Stain


Fastest drying stain on the market for hardwood flooring.


- 1 HOUR DRY TIME (all colors)
- Guaranteed adhesion with LOBA water-based finishes
- · Easy application and touch-ups
- No lap marks / No double staining
- No lingering odor
- Low VOC Emissions CDPH v 1.2 lower than requirements (96 ugm2/hr)
- Consistent coloration
- Mix together to create custom colors
- · Not self-combustible

VARIANT		6	600	US REGULATORY VOC
Various Colors	1qt.	6	648	< 830 g/l

APPLICATION DEVICE Cloth Normal Pad with buffer	sq ft / qt 150 - 250
Wood	



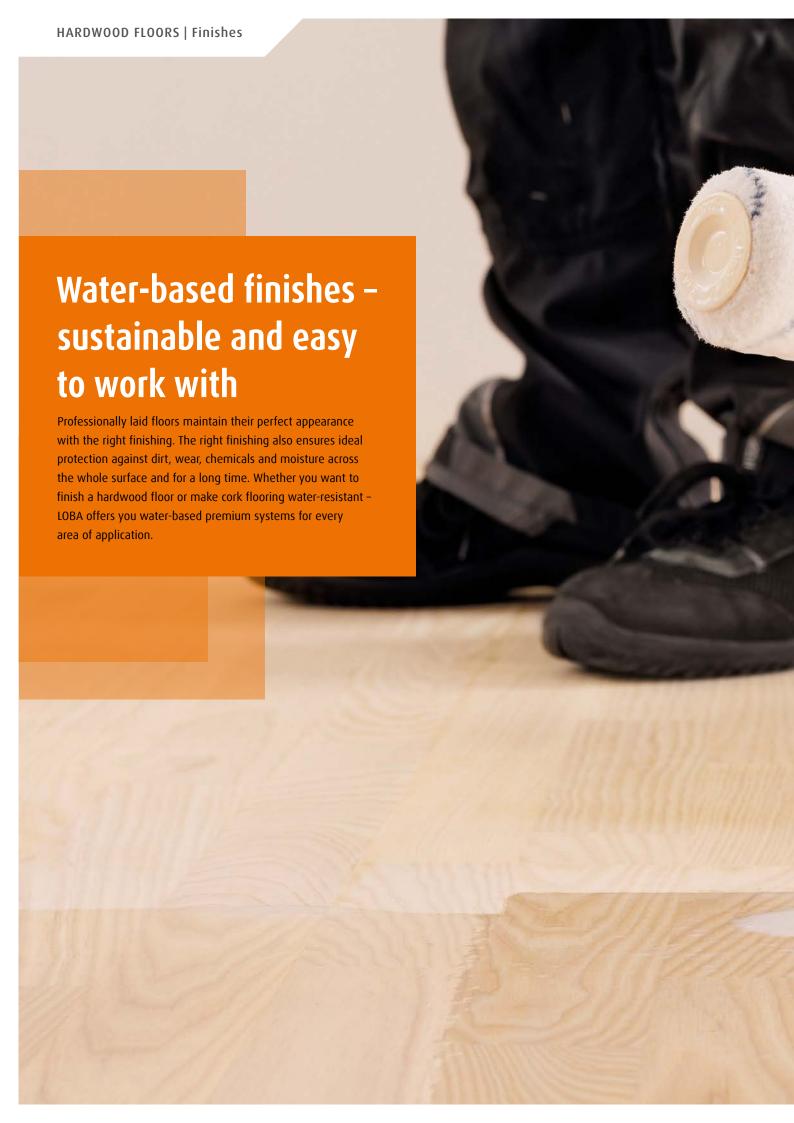

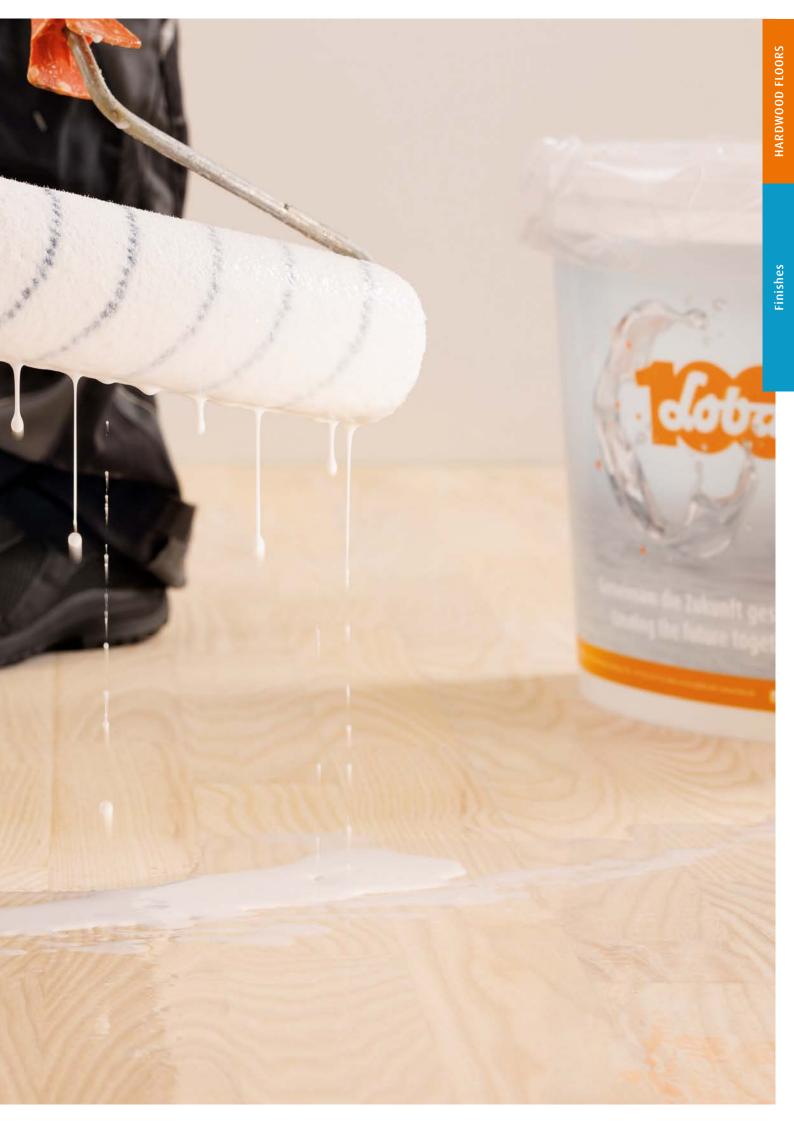




Life

1-Component water-based finish for hardwood flooring.

- · Good price/performance ratio
- · Balanced properties
- Excellent build
- $\boldsymbol{\cdot}$ Easy and safe application
- · Suitable for all light colored North American wood species

ITEM-#	VARIANT	Ö	600	US REGULATORY VOC
LO-FI-328	satin	2.5 gal.	75	< 168 g/l
LO-FI-329	semi-gloss	2.5 gal.	75	< 171 g/l








Viva

1-Component water-based finish for hardwood flooring.

- Excellent chemical and abrasion resistance
- · Very good resistance to scuffing
- Powerful resistance to plasticizer migration from wood flooring adhesives
- · Easy to use, no foaming or lap marks
- · Non-yellowing
- Fully cured after 5 days
- Low in emission, awarded the EMICODE® EC1 label
- Full "Connected Systems" approval

ITEM-#	VARIANT		\Box	600	US REGULATORY VOC
LO-FI-288	semi-gloss	1gal.	4	200	< 160 g/l
LO-FI-289	satin	1gal.	4	200	< 160 g/l





EasyFinish

1-Component water-based finish for hardwood flooring.

- Water-based polyurethane-acrylate formula with excellent wear resistance
- · No mixing no pot life no waste
- · Excellent build through high solid content
- Easy to use, no foaming or lap marks
- · Non-yellowing

APPLICATION DEVICE Micro 120 Roller T-Bar	sq ft / gal 500 - 600
Stress 1 2 3 4 5 6 Living area Commercial	7 8 9 10 Extreme
Wood Cork	
Manager 1 and the control of the con	CONNECTED SYSTEMS
EXPERIMENTAL SECTION OF COMPANY AND COMPAN	

ITEM-#	VARIANT			6-0-1	US REGULATORY VOC
LO-FI-012	satin	1gal.	4	200	< 232 g/l
LO-FI-014	semi-gloss	1gal.	4	200	< 205 g/l
LO-FI-011	gloss	1gal.	4	200	< 248 g/l




Hybrid

1-Component oil-modified water-based polyurethane finish for hardwood flooring.

- · Outstanding durability and chemical resistance
- Astonishing color
- Superior levelling, easy to use
- · Application without primer
- · No side bonding
- · No white lines
- · Optimally suited for exotic wood species
- Exceptional scratch resistance
- 75% cured after 24 hours

ITEM-#	VARIANT		6	600	US REGULATORY VOC
LO-FI-057	semi-gloss	1gal.	4	200	< 86 g/l
LO-FI-067	satin	1gal.	4	200	< 86 g/l






2K InvisibleProtect

2-Component water-based finish for hardwood flooring and interior wood surfaces.

- Looks and feels like natural untreated wood
- · Very easy to apply
- Self sealing no primer needed
- Excellent chemical resistance
- Non-ambering, keeps the natural appearance of the wood
- Creates the look of natural penetrating oil when used with 2K Intensive transparent.

ITEM-#		6	600	US REGULATORY VOC
LO-FI-238	1gal.	4	144	< 135 a/l







2K Supra A.T. 2-Component ceramic-reinforced water-based polyurethane finish.

- Water-based polyurethane formula for extreme wear resistance
- Exceptional scratch resistance
- Excellent build through high solid content
- · Non-yellowing
- Easy to use, no lap marks
- Floors are ready for full use after 12 hours

APPLICATION DEVICE Micro 120 Roller T-Bar	sq ft / gal 500 - 600
Stress 1 2 3 4 5 6 Living area Commercial	7 8 9 10 Extreme
Wood Cork	
List Genet Cr. K. G. Genet angered for K. G. Strand Mild Consistant 202182 CONNECTED 57518M5	

ITEM-#	VARIANT			6-0-0	US REGULATORY VOC
LO-FI-157	satin	1gal.	4	144	< 155 g/l
LO-FI-159	semi-gloss	1gal.	4	144	< 155 g/l
LO-FI-100	gloss	1gal.	4	144	< 178 g/l



2K Duo

2-Component water-based polyurethane finish for hardwood and cork flooring.

- Water-based polyurethane formula for extreme wear resistance
- Excellent build through high solid content
- Easy to use, no lap marks
- · Non-yellowing

Micro 120 Roller T-Bar	500 - 600
Stress 1 2 3 4 5 6 Living area Commercial	7 8 9 10 Extreme
Wood Cork	
the Could Lo. 50 control contr	ECT 1)
ij satili, setili gloss	

ITEM-#	VARIANT		\Box	600	US REGULATORY VOC
LO-FI-332	extra-matte	1gal.	4	144	< 80 g/l
LO-FI-330	satin	1gal.	4	144	< 130 g/l
LO-FI-331	semi-gloss	1gal.	4	144	< 140 g/l





SlipResistAdditive to improve slip resistant properties.

- Certified slip resistance
- · Will not attract dirt and debris
- Water-based technology, solvent-free
- Simple and safe application
- · Maintains finish clarity



ITEM-#		6	553
LO-FI-347	3 fl. oz.	15	5040



UV-Protect

Helps minimize the darkening of light colored wood from the influence of sunlight.

- Maintains wood color for a long period
- Suitable for all LOBA finishes

ITEM-#			ि
LO-FI-052	3.4 fl. oz.	15	5040



Whitener

Additive for brightening wood surfaces.

- Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- · Variable control of brightening intensity
- ${\boldsymbol{\cdot}}$ May be combined with all water-based sealers and finishes from LOBA
- Reduces the natural yellowing of the wood
- · Provides individual design options
- · Water-based technology, solvent-free
- Simple and safe application

ITEM-#		6	600
LO-FI-294	2.7 fl. oz.	15	5040

	Non-ambering	Light brightening	Medium brightening	Strong brightening
2. Coat			1	✓ ✓*
1. Coat		✓	/ /*	✓ ✓*
Primer	✓	✓		

*Application with 2K InvisibleProtect



Amberizer

Additive to achieve the traditional look of an aged oil modified polyurethane finish with water-based coatings.

- · Adds the look of oil-based finish
- Great to touch up and repair old floors
- Convenient package and great color consistency

ITEM-#		б	6-0-0
LO-FI-001	3 fl. oz.	15	5040



Argo

Additive to prolong the open time of water-based finishes.

- Reduces the risk of lap marks
- Does not change features of the finish

ITEM-#		6	6-0-0
LO-FI-003	6.5 fl. oz.	12	2604



2K Contact

2-Component water-based adhesion promoter for refinishing UV cured oxide containing factory finished hardwood and cork floors without intermediate sanding.

- · No sanding necessary no dust
- The safest way to recoat textured, hand scraped, and distressed surfaces
- · Very high coverage

APPLICATION DEVICE Trim Pad Applicator	sq ft / qt 500 - 600
Wood Cork	

ITEM-#		6		US REGULATORY VOC
LO-FI-008	1qt.	4	360	< 240 g/l



Rush

UV-curing 1-Component water-based polyurethane finish for hardwood flooring.

- · Instant cure no waiting time
- · Immediate 100% performance
- · Commerical durability
- · High solid formula
- Easy to use, no lap marks
- · No foaming, very good levelling

APPLICATION DEVICE Universal 100 roller	sq ft / gal
T-Bar Mobile UV lamp	400 - 500
Stress 1 2 3 4 5 6 : Residential Commercial	7 8 9 10 Extreme
CONNECTION CONNECTION OF THE PROPERTY OF THE P	

ITEM-#	VARIANT		600	US REGULATORY VOC
LO-FI-129	satin	2.5 gal.	75	< 10 g/l



List of Wood Species for Sealers & Finish Systems

1. Domestic Wood Species

Wood Species	2K Intensive	EasyPrime	VivaPrime
Acacia / Yellow Locust	+	\$	♦
Acacia / Yellow Locust steamed	+	♦	♦
Alder	+	+	+
Ash	+	+	+
Beech natural	+	+	+
Beech steamed	♦	+	♦
Birch	+	+	+
Cherry (North American/European)	+	+	♦
Chestnut tree	+	+	+
Elm	+	+	♦
Larch	+	♦	♦
Maple (North American/European)	+	+	+
Olive tree	+	+	♦
Pear tree	♦	-	-
Pine	+	+	+
Red Oak	+	+	+
Smoked Oak	+	+	♦
Spruce	+	+	+
Walnut (North American/European)	+	+	♦
White Oak	+	+	+

2K Invisible Protect	Life*	Hybrid*
♦	♦	♦
♦	♦	+
+	+	+
+	+	+
+	+	+
♦	♦	+
+	+	+
♦	♦	+
+	+	♦
♦	♦	+
♦	♦	+
+	+	+
♦	♦	-
-	-	_
+	+	+
+	+	+
♦	♦	-
+	+	+
♦	♦	-
+	+	+

2 Fratic Wood Species

2. Exotic Wood Species			
Afromosia / Kokrodua	+	+	♦
Arrurra Vermelho	+	-	_
Bamboo	-	+	+
Basralocus wood	+	+	♦
Cabreuva	+	+	♦
Camwood	+	+	
Coconut	+	+	♦
Coique steamed	+	+	•
Cumaru / Almendrillo	+	+	♦
Curupau	+	+	*
Cypress	+	+	\$
Doussie / Afzelia	+	+	*
Ebony / Makassar	_	+	*
Eucalyptus / Jarrah	+	+	*
Eucalyptus / Spottet Gum	+	+	*
Guatambu	+	+	*
Hard Pine (new floors)	+	+	*
Incienso Colorado	+	+	♦
Ipe / Lapacho / Guaycan	♦	♦	♦
Iroko / Kambala	-	-	_
Iron Wood	+	+	♦
Jatoba / Brasilian Cherry	+	+	♦
Kempas	-	♦	♦
Kotibe / Mahogany	+	+	♦
Mahogany	+	+	♦
Massaranduba	+	+	♦
Mecrusse	+	+	♦
Moluccan Ironwood	+	♦	♦
Muhuhu	+	-	-
Mutenye	+	+	♦
Орере	+	+	♦
Partridge Wood	+	+	♦
Piguia Marfin	+	-	-
Pitch Pine (old floors)	+	+	♦
Purpleheart	+	-	-
Rosewood	_	+	♦
Rubberwood	+	+	♦
Sucupira	+	+	♦
Tasmanien Oak	+	+	+
Tauari	+	+	+
Teak	+	+	♦
Tigerwood	+	+	*
Wenge	+	+	*
Yvyraro	+	+	*
,			•


♦	♦	+
-	-	+
+	-	-
♦	♦	♦
♦	♦	♦
♦	♦	♦
♦	♦	-
♦	♦	+
♦	♦	♦
♦	♦	-
-	_	-
♦	♦	+
♦	♦	+
♦	♦	♦
♦	♦	+
♦	-	♦
-	♦	-
♦	♦	+
♦	♦	-
♦	♦	+
♦	+	+
♦	-	+
-	♦	-
♦	+	+
+	♦	-
♦	+	+
♦	♦	♦
♦	♦	+
◊		+

^{+ =} Without limitation applicable

♦ = Application can cause problems. Consult LOBA prior to use

- = Use is not recommended

 $[\]ensuremath{^{*}}$ Can be used as a stand-alone system

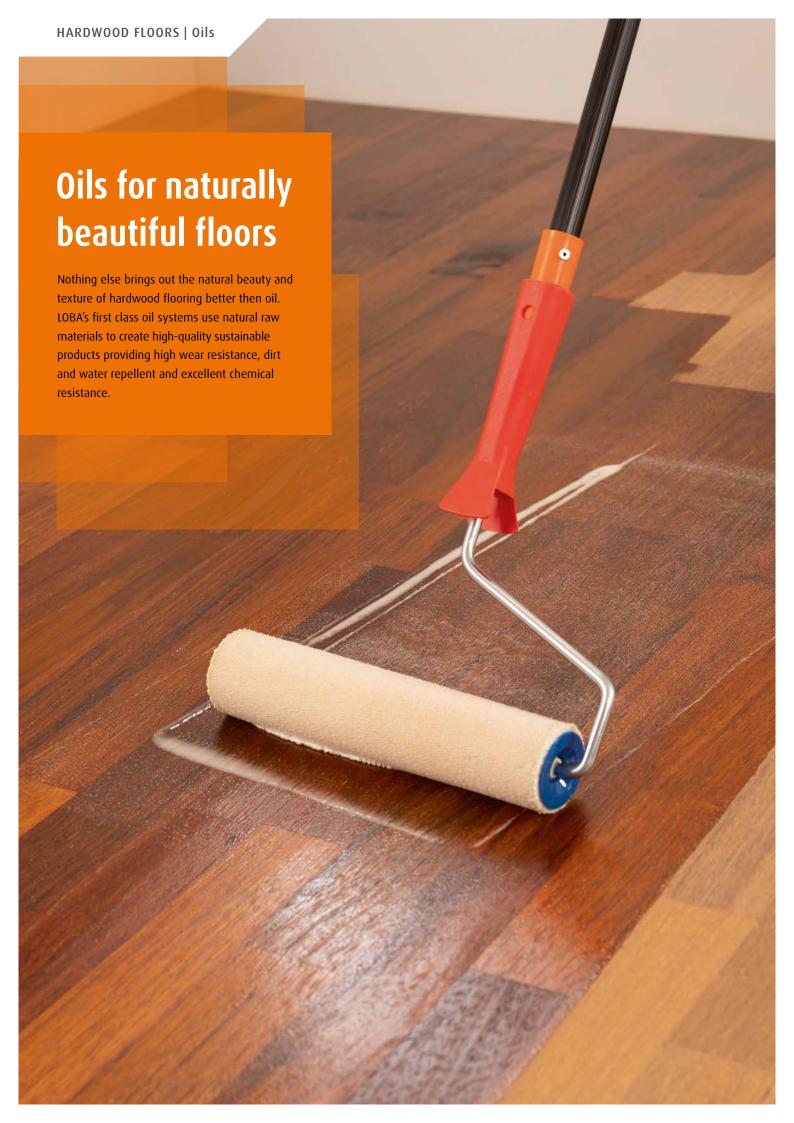



2K ImpactOil High-solid penetrating oil-based on natural ingredients.

- 100% solids solvent-free
- · Natural matte appearance
- Excellent water resistance, also suitable for bathrooms, kitchens and other rooms exposed to high humidity
- Increased anti-slip class R10 according to DIN 51130
- Easy and ergonomic application
- Time-saving application in 1 day
- · Very high coverage

APPLICATION DEVICE Micro 60-80 Roller	sq ft / 2.5 kg 400 - 500
Wood	
Limited 12.8. (ECT) COMMITTED TO STREET	THE SERVICE SERVICES

ITEM-#	VARIANT		6	
LO-FI-058	Transparent	2.5 kg	4	120



PreTone

Water-based pigment stain for wooden floors.

- Allows an infinite amount of customization
- · Intensifies light colors
- · Reduces oil-specific amberizing
- Easy and safe application
- · Solvent-free and odor-neutral
- · Unlimited color combinations

APPLICATION DEVICE Wischwiesel	sq ft / 2.5 l 275 - 325
Wood	

VARIANT		6	ि
Various Colors	2.51	6	216





VARIANT

2K ImpactOil Color

A durable 2-Component high-solid oil for hardwood flooring based on natural ingredients.

- 100% solids solvent-free
- Natural matte appearance
- Excellent water resistance, also suitable for bathrooms, kitchens and other rooms exposed to high humidity

LO-FI-194 Sand

- · Increased anti-slip class R10 according to DIN 51130
- · Easy and ergonomic application
- Time-saving application in 1 day
- · Very high coverage

APPLICATION DEVICE	. ,
Trowel	150 - 250
Wood	
	TI REQUARE
Inha cristi 8 C. 85 Inha cristi 8 C. 85 Inharman appoints Emposide and bills Candidates 2 (20) 14 (20) 15 (20)	ECTED SE AL

Various Colors 750 g All colors are also available in 100 ml sample cans. 10610-90 / SampleSet / 17 x 100 ml + 5 x 100 ml PreTone **Basic Colors** LO-FI-084 Black LO-FI-026 White LO-FI-196 Grey Wood Colors LO-FI-290 Walnut LO-FI-080 LO-FI-081 LO-FI-023 LO-FI-191 Mahogany Smoked oak Antique oak Kambala Sucupira Trend Colors

> LO-FI-193 Clay

Coloration with 2K ImpactOil Color

LO-FI-079 Papyrus

Illustration colors are non-binding

LO-FI-190 Chalk

Standard recommendation for the coloring impregnation of wood floors.

After the penetration time, level out with a single-disc buffing machine and LOBASAND SpecialPad beige
 Apply a second layer of 2K ImpactOil Color with LOBA Trowel, allow to penetrate
 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige
 First application of 2K ImpactOil Color with LOBA Trowel, allow to penetrate
 Preparation up to fine sanding

LO-FI-192 Oyster

Please note the detailed technical information, processing instructions and set-up recommendations as well as technical tips and tricks "Sanding Instruction Staining of Wooden Floors".

Discover the infinite color variety of 2K ImpactOil Color, also in combination with PreTone.

LO-FI-195 Silver

LO-FI-189 Pearl

With LOBA care and maintenance products, the beauty of your floors will persist.

List of Wood Species for Oil Systems

1. Domestic Wood Species

Wood Species	2K Impact0il
Acacia / Yellow Locust	+
Acacia / Yellow Locust steamed	+
Alder	+
Ash	+
Beech natural	+
Beech steamed	+
Birch	+
Black cherry	+
Cherry (North American/European)	+
Chestnut tree	+
Elm	+
Larch	+
Maple (North American/European)	+
Olive tree	+
Pear tree	♦
Pine	+
Red Oak	+
Smoked oak	+
Spruce	+
Walnut (North American/European)	+
White Oak	+

- Without limitation applicable Application can cause problems. Consult LOBA prior to use Use is not recommended

2. Exotic Wood Species

Wood Species	2K Impact0il
Afromosia / Kokrodua	+
Arrurra Vermelho	+
Cabreuva	+
Camwood	+
Coconut	+
Cumaru / Almendrillo	+
Cypress	♦
Doussie / Afzelia	+
Eucalyptus / Jarrah	+
Eucalyptus / Spottet Gum	+
Guatambu	+
Hard Pine (new floors)	+
Ipe / Lapacho / Guaycan	♦
Iroko / Kambala	+
Iron Wood	+
Jatoba / Brasilian Cherry	+
Kotibe / Mahogany	+
Mahogany	+
Mahogany Acajou	+
Massaranduba	+
Mecrusse	+
Moluccan Ironwood	+
Muhuhu	+
Орере	+
Partridge Wood	+
Piguia Marfin	+
Pitch Pine (old floors)	+
Purpleheart	+
Rubberwood	+
Sucupira	+
Tasmanien Oak	+
Teak	+
Wenge	+







VARIANT

Transparent

Deck0il

Oil impregnation for wood surfaces in outdoor areas.

- $\boldsymbol{\cdot}$ Deep protection against UV radiation, frost and moisture
- Good penetration behavior, effective deep protection
- Simple and safe application
- Also suitable for protecting outdoor furniture
- · Applicable on smooth and textured planks
- · Certified anti-slip properties as per DIN 51130 for work areas

120

• Suitable for children's toys as per EN 71-3

sq ft / 2.5 l 105 - 270



ITEM-#

LO-FI-298

DeckOil Color

Oil impregnation for wood surfaces in outdoor areas.

- Deep protection against UV radiation, frost and moisture
- Good penetration behavior

2.51

- Easy and safe application
- · Also suitable for protecting outdoor furniture
- Applicable on smooth and textured planks
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children's toys as per EN 71-3

APPLICATION DEVICE Oil brush	sq ft / 2.5 l 105 - 270
Wood	

VARIANT	Ö	6	المان
Various Colors	2.51	4	120





DeckDegrayerSpecial cleaner for wooden surfaces in outdoor areas.

- ${\boldsymbol{\cdot}}$ Ideal degraying preparation prior to surface treatment
- · Easy and safe application
- · Can be used on horizontal and vertical surfaces and outdoor furniture, does not drip
- · No sanding necessary
- · Applicable for all wood species

ITEM-#		6	6-0-0
LO-FI-306	2.51	6	144

Wood

Wood | WPC

Wood

Wood | WPC



DeckCleaner

Maintenance cleaner for outdoor areas.

- · Can be used on horizontal and vertical surfaces and outdoor furniture, does not drip
- Very productive
- · Suitable for oiled or finished wood and WPC

ITEM-#		6	6-0-0
LO-FI-305	2.51	6	144



DeckRefresh

Water-based wipe care for outdoor areas.

- · Thorough, gentle wipe care
- Gives the surface a silky sheen
- Easy and safe application
- · No remover necessary due to a self-emulsifying formula
- Suitable for oiled and finished wood surfaces in outdoor areas

ITEM-#		6	553
LO-FI-304	2.51	6	144




WPC Refresh


Maintenance oil based on solvents.

- Optical upgrading for WPC and oiled wood surfaces
- · Brings back the silky matte look
- · Easy and safe application
- · Suitable for WPC and oiled wood surfaces

ITEM-#	Ö	6	ज्ज -
LO-FI-307	1qt.	6	672



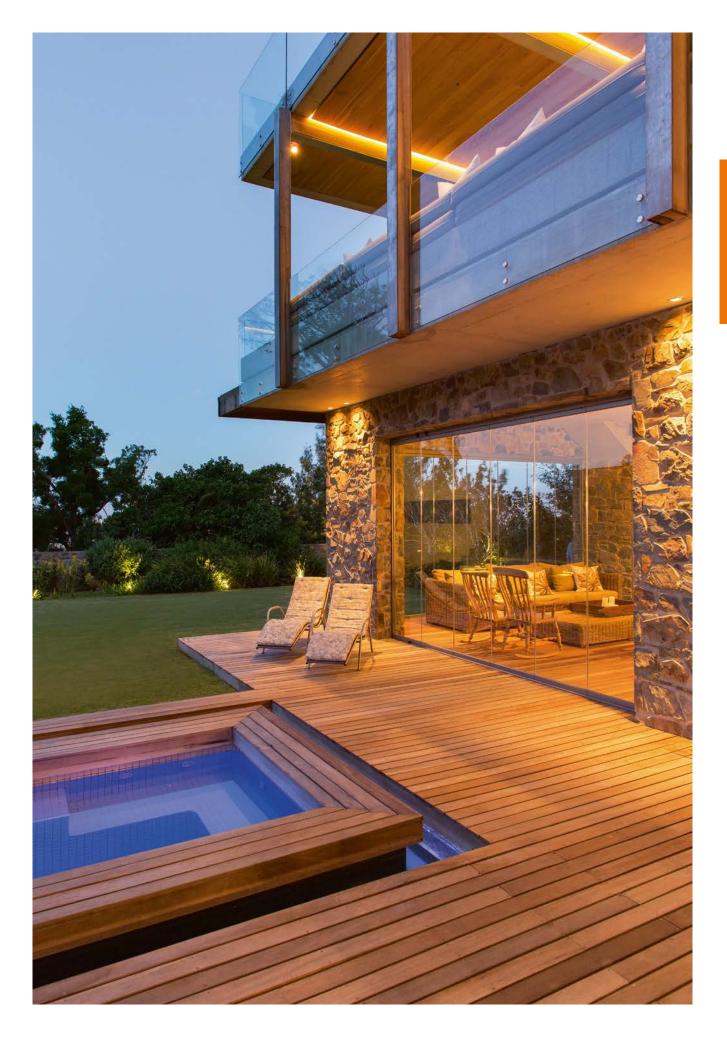

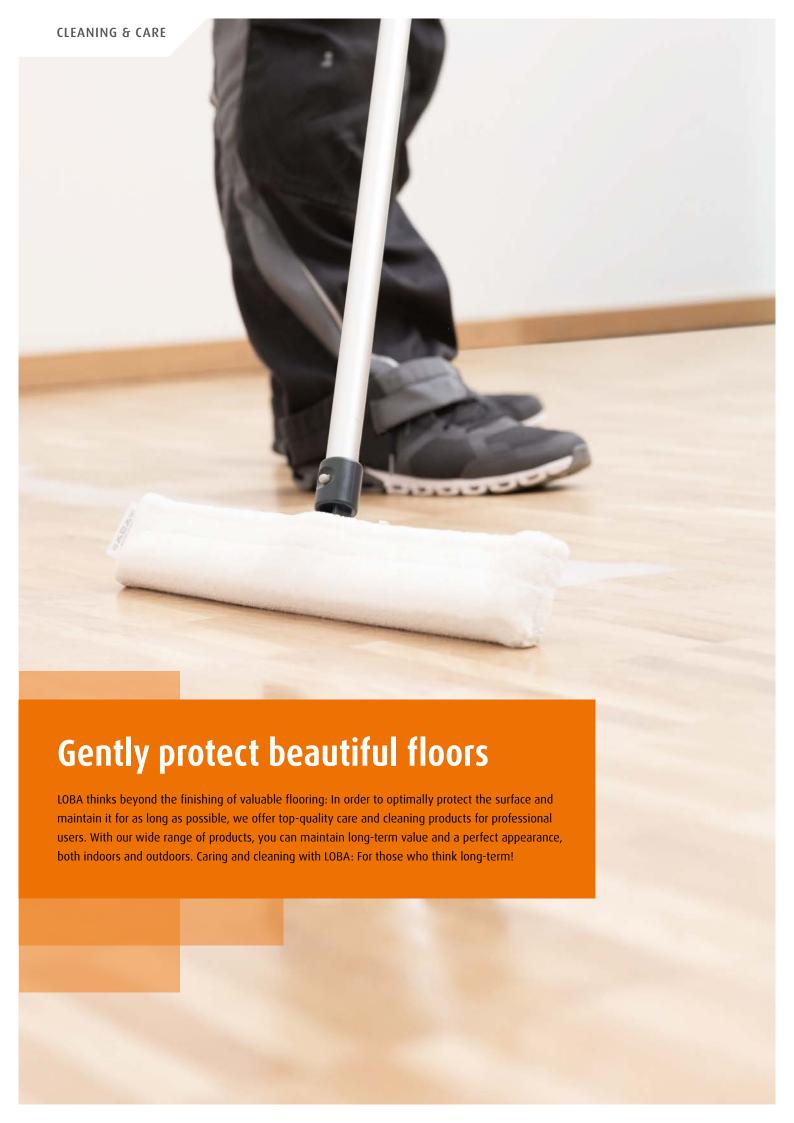

Wood | Cork | Linoleum | PVC | Tile



Remover

Low-foaming, deep cleaning concentrate for heavily soiled floors and to break down and remove layers of old floor care products.

- · Strong cleaning ability
- · Does not leave streaks or residues
- Breaks down most care and maintenance products
- pH-neutral water-based formula

ITEM-#	Ö	6	6-0-0
LO-MA-009	1qt.	12	576



FloorCare

Water-based floor care product.

- · Provides a protective layer
- $oldsymbol{\cdot}$ Can be removed without sanding
- VOC compliant
- · Excellent adhesion
- Easy to apply

ITEM-#	VARIANT		6	
LO-MA-002	satin	1qt.	12	576
LO-MA-003	semi-gloss	1qt.	12	576



ParkettSoap R2UParkettSoap R2U is a ready to use cleaning solution for the deep cleaning of wood surfaces which are treated with oxidizing oils.

- Ready to use, no mixing required
- Removes grey and faded layers after exposure to sunlight
- · Great for indoor and outdoor use
- · Water-based yet powerful formula to remove residue and dirt

ITEM-#		6	600
LO-MA-010	1gal.	4	200

Wood

Wood



Parkett0il

Maintenance oil based on solvents.

- Retains the matte finish of oiled floors
- · No self-polishing
- Suitable as spot treatment
- · Removes wear marks

ITEM-#		6	٠٠٠
LO-MA-007	1qt.	6	480




Nature0il

Water-based maintenance oil.

- Ready to use, solvent-free and soap-free
- Reliably retains the matte finish of oiled hardwood floors
- Ideal for treating the whole floor or touching up smaller areas
- · Simple application with cloth or sponge

ITEM-#		6	
LO-FI-115	1qt.	15	540



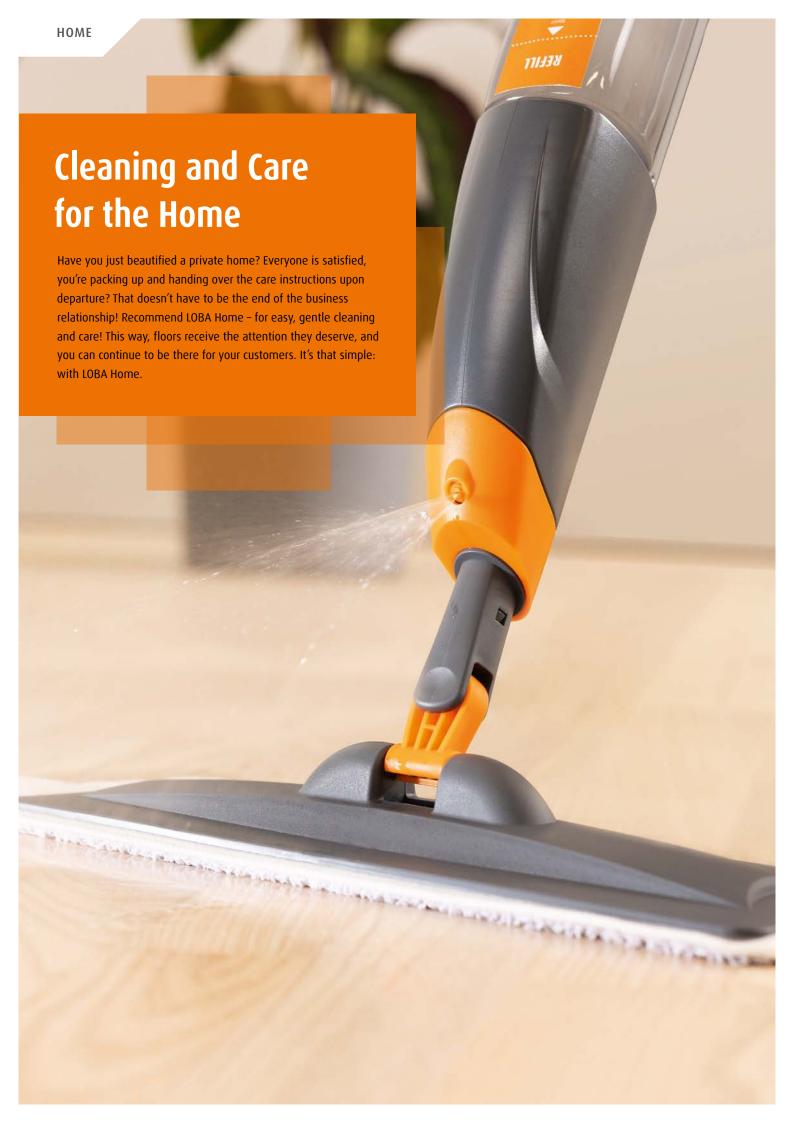



Universal Floor Cleaner Spray For maintenance cleaning.

- Ready-to-use spray
- · Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastic

ITEM-#			ل ت تا
LO-MA-043	16. fl. oz.	12	1224



Universal Floor Cleaner Concentrate

All water-resistant flooring

All water-resistant flooring

For maintenance/intensive cleaning.

- · Ideally suited for intensive and maintenance cleaning
- · Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastic

ITEM-#		6	600
LO-MA-042	16. fl. oz.	12	1224



Spray Mop Set

Mop with integrated spray function.

- · Quick and easy cleaning without a cleaning bucket
- Damp mopping ideal for wooden floors
- Includes microfiber mop pad and 250 ml refill cleaning concentrate

ITEM-#	6	
LO-MA-037	12	192



Mop for application of LOBA cleaning and care products.

- Easy application
- Including high-quality microfiber mop pad (washable up to 140° F (60° C) without fabric softener)

ITEM-#	6	6-0-0
LO-MA-035	24	576



Spray Mop Refill

High-yield cleaning concentrate for refilling the LOBA Spray Mop.

- Easy dosing and refilling of the LOBA Spray Mop container
- $\bullet \ \ \text{Fast drying without streaks}$
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastic

ITEM-#		6
LO-MA-046	8.45 fl. oz.	12



Mop Pad

Replacement cover for LOBA Spray Mop and Mop.

- High quality microfiber mop pad (washable up to 140° F without fabric softener)
- Suitable for LOBA Spray Mop and Mop

ITEM-#	б
LO-MA-040	100

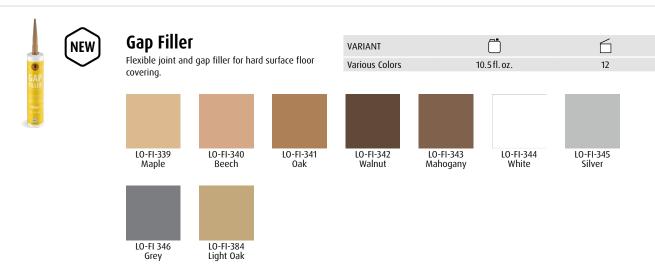


Illustration colors are non-binding





Repair SetSet with different colors. The solution for all smaller repairs of solid hardwood, engineered hardwood, laminate, and cork flooring. Colors are mixable. Includes wedge scraper, hot knife, and abrasive fabric.

ITEM-#	VARIANT	DESCRIPTION	6
LO-FI-293	Various Colors	Repair Set	1



Repair Refill SetSet of 20 sticks of coatable hard wax to refill LOBA Repair Set.

ITEM-#	VARIANT	DESCRIPTION
LO-FI-295	Various Colors	Repair Refill Set






Premium | Ceramic For the most beautiful sanding pattern and the best tool life

- · Achieves the best sanding pattern
- · Very long service life
- · Extreme heat resistance
- Best price-performance ratio on the market, as it is very resilient
- Suitable for all surface treatments
- · For sanding UV-coated floors

Product	Ceramic		Dimensions	C	oarse sandin	9	Medium	sanding		Fine sanding	
Belt		10	8"	P24	P36	P40	P50	P60	P80	P100	P120
		50	ø 6"	P24	P36	P40		P60	P80	P100	P120
Hook & Loop disc		50	ø 7"	P24	P36	P40	P50	P60	P80	P100	P120
		50	ø 8"					P60	P80	P100	P120
Hook & Loop disc Center hole	•	50	ø 7"	P24	P36	P40	P50	P60	P80	P100	P120

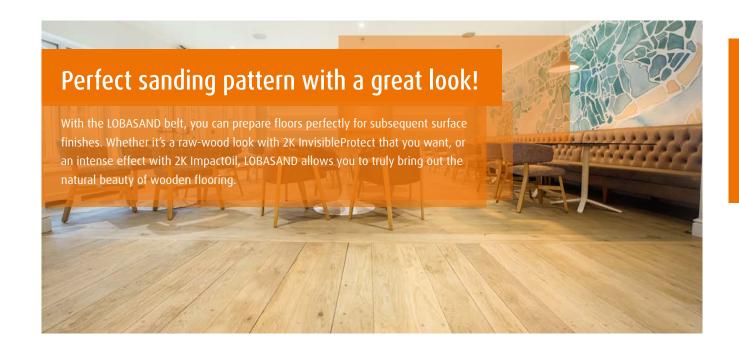



Dynamic | Zirconia For fast results and high abrasion

- · Fast removal
- · Highly aggressive
- Clogs less because of half-open spreading
- Good heat resistance
- $\bullet\,$ 100 % zirconia, unique selling proposition on the market

Product	ZIRCONIA	6	Dimensions	C	oarse sandin	g	Medium	sanding		Fine sanding	
Belt		10	8"	P24	P36	P40	P50	P60	P80	P100	P120
		50	ø 5"					P60	P80	P100	P120
		50	ø 6"	P24	P36	P40		P60	P80	P100	P120
Hook & Loop disc		50	ø 7"	P24	P36	P40	P50	P60	P80	P100	P120
		50	ø 8"					P60	P80	P100	P120
Hook & Loop disc Center hole		50	ø 7"	P24	P36	P40	P50	P60	P80	P100	P120



Classic | Aluminum Oxide For price-conscious projects

- · Leaves behind fewer visible scratches
- · Low-cost price per unit
- Good for preparation for subsequent impregnation or coloring

Product	ALUMINUM OXIDE	б	Dimensions		Coarse	sanding		Medium	sanding	ı	ine sandin	g
Belt		10	8"	P16	P24	P36	P40	P50	P60	P80	P100	P120
Hook & Loop disc		50	ø 6"		P24	P36	P40		P60	P80	P100	P120
		50	ø 7"	P16	P24	P36	P40	P50	P60	P80	P100	P120
		50	ø 8"						P60	P80	P100	P120
Hook & Loop disc Center hole	0	50	ø 7"	P16	P24	P36	P40	P50	P60	P80	P100	P120

Other abrasives and pads

Product	ITEM-#		Dimensions	Range of use
SpecialPad beige	LO-FI-285	10	ø 16"	Leveling
HandPadSet beige	LO-FI-022	1 + 25 pads	3.5 x 5"	Leveling
SpecialPad green	LO-FI-287	10	ø 16"	Thorough cleaning
NormalPad white	LO-SD-001	10	ø 16"	Stain application
DustPad	LO-SD-143 / LO-FI-138	5	ø 5" / ø 16"	Dust reduction
- (ø 5" / ø 16"	
PerforatedPad		10	80/100/120/150/180/220	Final and intermediate sanding





Roller frame, roller extension pole

Roller frame: for finish rollers. Telescopic bar: roller extension. Can be extended up to 8 ft.

ITEM-#	DESCRIPTION	\subseteq
LO-FI-077	Roller frame for 10" roller	20
LO-FI-017	Roller frame for 4" edge roller	20
LO-FI-127	Telescopic bar expandable 4 - 8 ft	10



Deluxe 120 Roller

Ensures the recommended quantity (approx. 375-400 sq ft/gal). No roller frame included.

ITEM-#	DESCRIPTION	6
LO-FI-116	10" roller	12



Universal 100 Roller

For LOBA Rush Application quantity approx. 400-500 sq.ft. / gal. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-126	10" roller	12



Micro 120 Roller

For all LOBA water-based sealers and finishes. Application quantity between 400-600 sq.ft. / gal. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-031	10" roller	12



Micro 60-80 Roller

For the roller application of oils (LOBA oils and 2K Intensive). Application quantity between 400-540 sq. ft. / 2.5 kg. No roller frame included.

ITEM-#	DESCRIPTION	
LO-FI-032	10" roller	12



Rollerbox

Clean storage of rollers.

ITEM-#	DIMENSIONS	6
LO-FI-033	10"	50



Edge Roller

Roller for edges and other hard-to-reach areas.

ITEM-#	DESCRIPTION	
LO-FI-016	4" roller	10



Oil brush

 $\label{lem:lobal_products} \mbox{Applicator for certain LOBA products for outdoor areas.}$

ITEM-#	DIMENSIONS	
LO-MA-032	8"	1



Trowel

Applicator for filler products and oils.

ITEM-#	DESCRIPTION	DIMENSIONS	
LO-FI-059 / LO-FI-051	Stainless steel	11"/14"	6



Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.

ITEM-#	DESCRIPTION	DIMENSIONS	
LO-FI-055 / LO-MA-017	Applicator/Applicator pad	4.5 ft/17"	20/100

Range of Use - Rollers









	Micro 60-80	Micro 120	Universal 100	Deluxe 120
EasyPrime	-	✓	-	-
VivaPrime	-	✓	-	-
2K Intensive	✓	-	-	-
		-		-
EasyFinish	_	✓	-	✓
Viva	_	✓	-	✓
Life	_	✓	_	✓
2K InvisibleProtect	-	-*	-	✓
2K Supra A.T.	-	✓	-	✓
2K Duo	-	✓	-	✓
Hybrid	-	✓	-	✓
Rush	-	-	✓	-
2K ImpactOil transparent	✓	-	-	-

^{✓ =} Without limitation applicable

⁼ Use not recommended = Please refer to the Technical Information



Coating bucket, bucket linerBucket with lid and measuring scale. PE liners

for the coating bucket.

ITEM-#	DESCRIPTION	
LO-FI-005	Bucket filling quantity 4.75 gal	1
LO-FI-268	Bucket liner	25



Wiping cloth
Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for cleaning tools and machines.

ITEM-#	DIMENSIONS	6
LO-MA-013	20" x 24"	100



Canister opener

Convenient tool for opening LOBA canisters. Especially helpful for opened canisters.

ITEM-#	6
LO-MI-014	1



Spray can

Simple application of cleaning and maintenance

DESCRIPTION	6
LO-MA-034	1



Our stress levels at a glance


The new stress levels defined by LOBA help you find the perfect finish for the types of stress your project will be exposed to.

Our teams in the Application Technology and Research & Development departments continuously test LOBA products in order to ensure consistent quality and develop our products further on the basis of new requirements defined by our customers as well as laws and regulations. The tests are extremely comprehensive and examine numerous properties.

Four test categories were chosen that most strongly represent the overall resistance of the finishes:

- · Single scratch
- · Wear
- Abrasion
- · Chemical resistance

1K and 2K finishes are evaluated on the basis of laboratory values in the respective categories on a scale of 1 - 10, and a mean value is also calculated from this.







Calculation example using 2K Duo

As shown on the product

Explanation of symbols



EMI CODE® EC1 PLUS and EC1R PLUS:





Suitable for children's toys according to DIN EN 71-3



Connected Systems: System guarantee for LOBA sealing products and oils for Wakol adhesive and levelling compounds



Non-slip according to DIN 51097 evaluation group A



EMICODE® EC1 and EC1R: Very low emissions



construction product, Class M1



Emission-tested construction product according to French . VOC regulation



Non-slip according to DIN 51097 evaluation group B



EMICODE® EC2 and EC2R: Low emissions



Emissions-tested Construction product compliant with DIBt principles



R9

Non-slip according to DIN 51130 evaluation group R9



10-19°

Non-slip according to DIN 51130 evaluation group R10



Non-slip according to DIN 51130 evaluation group R11



Container size



product



Packaging unit

GISCODE key

W1	Water-soluble surface treatment agents, solvent-free
W2+	Water-soluble surface treatment agents, solvent content up to 5 %, N-methylpyrrolidone-free
W2/DD+	Water seal with hardener containing isocyanate, solvent content up to 5%, N-methylpyrrolidone-free
W3+	Water seal, solvent content up to 15 %, N-methylpyrrolidone-free
W3/DD+	Water seal with hardener containing isocyanate, solvent content up to 15 %, N-methylpyrrolidone-free
Ö10+	Oils/waxes, solvent-free, butanonoxime-free
Ö10/DD+	Oils/waxes, solvent-free, oxime-free, with hardener containing isocyanate
Ö20+	Oils/waxes, low-solvent, de-aromatized, oxime-free
Ö40+	Oils/waxes, contains solvents, de-aromatized, oxime-free
Ö40/DD+	Oils/waxes, contains solvents, de-aromatized, oxime-free, with hardener containing isocyanate
Ö60	Oils/waxes, containing high amounts of solvent (> 15 %), de-aromatized
GE10	Emulsions / dispersions (contain surfactants)
GE20	Emulsions / dispersions, contains solvents (5 % - 15 %)
GG0	Basic cleaner, other
GG10	Basic cleaner, solvent-free, not labelled
GG60	Basic cleaner, irritant, contains solvents, with H-substances (aminoethanol, butyl glycol, ethanediol, N-methylpyrrolidone)
GG80	Basic cleaner, caustic, contains solvents
GU40	Maintenance cleaner, solvent-free (contains surfactants)
GU50	Maintenance cleaner, contains solvents without H-substances
GU70	Maintenance cleaner, solvent-free, irritant
GU73	Maintenance cleaner, solvent-free, irritant (including severe eye damage)
GU83	Maintenance cleaner, contains solvents, irritant (including severe eye damage)
G1	Basic sealant and wood putty with high solvent content, de-aromatized and free of substances with a low boiling point (solvent content > 15%)
G2	Basic sealant and wood putty with high solvent content, de-aromatized and containing substances with a low boiling point (solvent content >15 %)

New website features

PRODUCT FILTER

Are you looking for the perfect product for a quote or a special range of use? Simply enter the filter criteria and find what you need!

INSPIRATION & APPLICATION

Are demanding customers or specific tenders posing a challenge for you? You'll find ideas and background information here.

REFERENCES

Are your customers looking for inspiration?
You've come to the right place!
Let them browse through our
references and collect ideas.



Upload your project pictures!



Loba Wakol LLC 2732 Hwy 74 West Wadesboro, NC 28170 Phone: (800) 230-6456 Email: info@loba-wakol.com www.loba-wakol.com



forestry with inks based on organic oil.

LOBA Wakol North America is member of



LOBA GmbH & Co. KG is ISO-certified



