




PRODUCTS 22 | 23

LOBA - Your partner for surface finishing and care



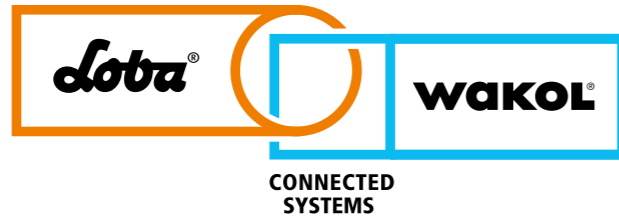

Connected Systems perfect results for your projects

Your benefits with LOBA and Wakol Connected Systems:

- Outstanding compatible products
- Powerful security for your installation
- No chemical reaction between finish and adhesive
- No softening of the finish, prevents dark joints
- Successful application guaranteed in a well proven system

We care about your success!



| | | WAKOL | | | | | | |
|--------|------------------------|---------------------------|--------|--------|--------|--------|--------|--------|
| | | 1K WOOD FLOORING ADHESIVE | | | | | 2K | |
| | | MS 230 | MS 232 | MS 260 | MS 262 | MS 290 | MS 292 | PU 225 |
| LOBA | 1K FINISH | | | | | | | |
| | EasyFinish | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Viva | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Life | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Hybrid | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Rush | | | ✓ | ✓ | ✓ | ✓ | ✓ | |
| LOBA | 2K FINISH | | | | | | | |
| | 2K InvisibleProtect AT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 2K Supra AT | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 2K Duo | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |
| LOBA | OIL | | | | | | | |
| | 2K ImpactOil | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | 2K ImpactOil Color | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Contents

ABOUT LOBA

| | |
|-------------------|----|
| Connected Systems | 2 |
| Philosophy | 4 |
| Company | 5 |
| Workshops | 46 |
| Legend | 47 |

LOBADUR

| | |
|---------------------------------------|-------|
| Fillers & Sealers | 9 |
| 1K water-based finishes | 10-11 |
| 2K water-based finishes | 12-13 |
| Additives | 14-15 |
| Special products | 16-17 |
| UV on-site water-based finishes | 18 |
| Suitability list - sealers & finishes | 19 |

LOBASOL

| | |
|-------------------------|-------|
| High solid | 21-22 |
| Stain | 22 |
| Suitability list - oils | 23 |
| Outdoor | 24 |

LOBACARE

| | |
|-----------------------------------|-------|
| Remover | 27 |
| Care products for finished floors | 27 |
| Care products for oiled floors | 28 |
| Outdoor | 28-29 |

LOBA HOME

| | |
|--------------------|-------|
| The home care line | 31-33 |
|--------------------|-------|

LOBASAND

| | |
|-------------------------------------|-------|
| Suitability list - abrasives & pads | 35 |
| Abrasives & Pads | 36-37 |

LOBATOOL

| | |
|-----------------------------------|-------|
| Suitability list - rollers | 39 |
| Application devices & accessories | 40-44 |
| Miscellaneous | 45 |

Discover the LOBA-
Wakol App for
North America

Always On-Site.
Find answers to
your everyday
questions quickly.



Play Store




App Store

Visit LOBA
download
section

Set-up recommendations
Technical Information
Application videos
Technical tips and tricks
→ www.loba.de/us_en/downloads



Status December 2022 | Subject to change | Updates can be found at www.loba-usa.com and www.wakol-usa.com. Professional use of the listed Connected Systems products is a key factor for successful results. Please take note of the respective technical data sheets of the products used.



www.loba-usa.com



100 years of passion, competence and service

We take our social and sustainable responsibilities seriously



LOBA On Top!

LOBA loves beautiful floors. As a family business with almost 100 years of tradition, we provide you with modern products for the design, finishing and care of wood floor, cork, elastic and mineral surfaces. LOBA places the highest value on user-friendly, safe and sustainable products. Out of responsibility for humans and nature, we have long focused on the development of environmentally compatible solvent-free systems, which consist of up to 100 percent natural raw materials – for a feel-good living environment.

1922 Founding

On 13 April 1922, Wilhelm Hornung and Dr Max Fischer establish “Vereinigte Wachswarenfabriken AG Hornung und Dr Fischer” in Ditzingen, near Stuttgart. Its products include floor stains, ski wax, and household candles.

1952 Expansion

The company expands its product range, developing and manufacturing paints, and varnishes.

1959 Pioneering work

LOBA launches the world’s first commercially available thermal insulation composite system, under the brand name Dryvit®, making a major contribution to energy saving.

1995 Leadership

With its two-component, water-based parquet finishing systems, LOBA sets new standards that remain unmatched to this day.

2007 Expansion

Foundation of the subsidiary “LOBA-Wakol LLC” in Charlotte, North Carolina, USA.

2012 Innovation

LOBA launches LOBACURE, the latest generation of water-based finishing systems with on-site UV curing – setting new standards in floor refurbishing.

2015 Investment

Opening of the new logistics and training center.

2017 Expansion

Foundation of the subsidiary “LOBA do Brasil” near São Paulo.

2020 North American Expansion

USA continues to expand with new headquarters in Wadesboro, North Carolina

2022 LOBA celebrates anniversary

Technical excellence and innovative strength, passion and outstanding service – in 70 countries worldwide. Produced in Germany, made for the world!

LOBA wants to ensure that our customers, employees and all people who work and live on floors treated with our products are safe. The protection of the environment is of course also a top priority. We take these responsibilities seriously and act accordingly. This commitment is best illustrated with these concrete examples:

- LOBA decided many years ago to cease production of parquet varnishes that contain high concentrations of solvents.
- Today, LOBA supplies only water-based and natural oil, low-emission products. LOBA was among the first manufacturers to obtain DIBt and EMICODE® approval.
- The emission values of LOBA products are significantly below the limit values for volatile organic compounds (VOCs*) laid down in the European Decopaint Directive.

For us at LOBA-Wakol, our sustainability effort focuses on our people, processes, products, and packaging. Our mission is to consistently provide a safe, healthy atmosphere for our people, and all our customers. We are dedicated to identifying the best processes, products, and packaging, which reduces our carbon footprint and creates a positive environmental impact for all of us now and for future generations.



* VOC = Volatile Organic Compound

New look, same quality!



Arriving early 2023

MORE INFORMATION, MORE ORIENTATION

Reach your goal even faster – with the new LOBA labels.



The key facts at a glance


The new, user-friendly LOBA label design makes it even easier for you to find the right product.

- Clear presentation of product features
- Background images show the range of use
- Color coding system for better distinction of the product types


THE EASY WAY TO THE RIGHT PRODUCT

- Color coding system
- Range of use
- Scan for more info
- Certifications
- Product set-up
- Product name
- Gloss level
- Special feature
- Mass/hardener assignment
- Stress level

THE RANGE OF USE

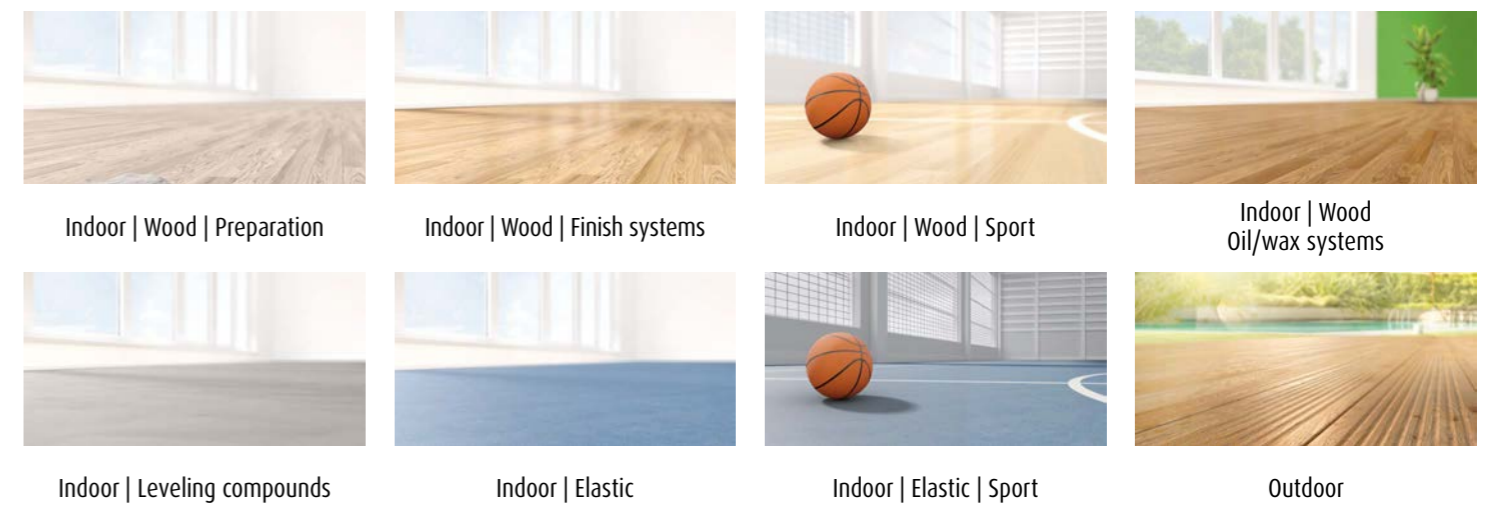

THE NEW COLOR CODING SYSTEM

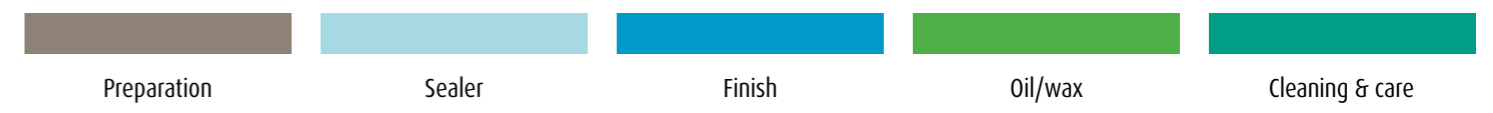

LOBADUR® Fillers & Sealers



LOBADUR®

Environmentally friendly water-based universal products.

Systematic surface protection. Professionals worldwide are confident with LOBA, a perfectly coordinated system of water-based finishes, additives, sealers, joint fillers and special products. Whether natural or colored wood, normal or heavily used floors: LOBA is always the right choice and provides an natural, matte or glossy appearance, depending on your wishes. The suitable sealers are easy to apply and guarantee the highest quality and safety.

EasyFill

Fast drying, water-based binder designed to be mixed with your fine wood dust to create a customized wood filler.



- Excellent coverage
- Fast drying
- No offensive odor
- Easy application
- Suitable for all types of wood



| |
|---------------------|
| |
| min 30-60 |
| sq ft / gal 500-800 |

H

| Item-#: | | | | US Regulatory VOC |
|-----------|-------|---|-----|-------------------|
| LO-FI-261 | 1 gal | 4 | 200 | < 93 g/l |

EasyPrime

Polyurethane-acrylate water-based sealer for wooden floors.



- No lap marks
- Reduces the side bonding tendency of water-based finishes
- Can be finished with all LOBA water-based finishes
- Suitable for almost all wood species
- Excellent coverage rate



| | |
|---------------------|--|
| | |
| h 1-2 | |
| sq ft / gal 400-500 | |

H

| Item-#: | | | | US Regulatory VOC |
|-----------|-------|---|-----|-------------------|
| LO-FI-015 | 1 gal | 4 | 200 | < 232 g/l |

2K Intensive

High-Solid 2-Component oil-based sealer for wooden floors.



- Adds warmth and rich color to wood flooring
- No grain raise
- Combination of an oiled look with the advantages of a sealed surface
- Easy application
- Quick-drying oils allow finishing after 12 hours
- Water-free and low VOC

| |
|--------------------|
| |
| h 12 |
| sq ft / 2.5 kg 540 |

H

| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|-------------|--------|---|-----|-------------------|
| LO-FI-239 | Transparent | 2.5 kg | 4 | 120 | < 69 g/l |

EasyFinish



| | | | |
|-------------|--|---------|--|
| | | | |
| | | h | |
| | | 2-3 | |
| sq ft / gal | | 500-600 | |

1-Component, water-based finish for wooden floors.

- Water-based polyurethane-acrylate formula with excellent wear resistance
- No mixing - no pot life - no waste
- Excellent build through high solid content
- Easy to use, no foaming or lap marks
- Non-yellowing

| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|------------|-------|---|-----|-------------------|
| LO-FI-012 | Satin | 1 gal | 4 | 200 | < 232 g/l |
| LO-FI-014 | Semi-gloss | 1 gal | 4 | 200 | < 205 g/l |
| LO-FI-011 | Gloss | 1 gal | 4 | 200 | < 248 g/l |

Easy-Line

Standard recommendation for the finishing of heavily used wood floors.

- Coarse and medium sanding - see LOBASAND
- Smooth the floor over with **EasyFill** and sanding dust of the respective wood species, fill joints
- Final sanding** - see LOBASAND, also for an additional final sanding with a multiple or single disc machine
- Application **EasyPrime** with LOBA Roller Micro 100-120
- First coat **EasyFinish** with LOBA Roller Micro 100-120 or LOBA Roller Deluxe 120
- Intermediate sanding with LOBASAND Perforated Pad P180 or equivalent
- Second coat **EasyFinish** with LOBA Roller Micro 120 or LOBA Roller Deluxe 120

i Please consider the detailed technical information, application instructions and set-up recommendations.

Discover the perfectly matched LOBA Easy products.

With LOBA cleaning and care products the beauty of your floors will remain.

Hybrid

Oil-modified water-based 1-Component polyurethane finish for wooden floors.

- Outstanding durability and chemical resistance
- Astonishing color
- Superior levelling, easy to use
- Application without sealer
- No side bonding
- No white line marks
- Optimally suited for exotic wood species
- Exceptional scratch resistance
- 75% cured after 24 hours




| | | | |
|-------------|--|---------|--|
| | | | |
| | | h | |
| | | 4-6 | |
| sq ft / gal | | 500-600 | |

| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|------------|-------|---|-----|-------------------|
| LO-FI-067 | Satin | 1 gal | 4 | 200 | < 198 g/l |
| LO-FI-057 | Semi-gloss | 1 gal | 4 | 200 | < 198 g/l |

Viva

1-Component, water-based finish for wooden floors.

- Excellent chemical and abrasion resistance
- Very good resistance to scuffing
- Powerful resistance to plasticizer migration from wood flooring adhesives
- Easy to use, no foaming or lap marks
- Non-yellowing
- Fully cured after 5 days
- Low in emission, awarded the EMICODE® EC1 label
- Full "Connected Systems" approval



| | | | |
|-------------|--|---------|--|
| | | | |
| | | h | |
| | | 2-3 | |
| sq ft / gal | | 500-600 | |

| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|------------|-------|---|-----|-------------------|
| LO-FI-289 | Satin | 1 gal | 4 | 200 | < 160 g/l |
| LO-FI-288 | Semi-gloss | 1 gal | 4 | 200 | < 160 g/l |

Life

1-Component, water-based finish for wood flooring.

- Good price/performance ratio
- Application without sealer
- Balanced properties
- High filling capacity
- Easy and safe application
- Suitable for all light colored North American wood species



| | | | |
|-------------|--|---------|--|
| | | | |
| | | h | |
| | | 2-3 | |
| sq ft / gal | | 500-600 | |

| Item-#: | Variant | | | US Regulatory VOC |
|-----------|------------|---------|----|-------------------|
| LO-FI-328 | Satin | 2.5 gal | 75 | < 168 g/l |
| LO-FI-329 | Semi-gloss | 2.5 gal | 75 | < 171 g/l |

2K Duo



| | | |
|-------------|---------|--|
| | | |
| h | 2-3 | |
| sq ft / gal | 500-600 | |

Water-based 2-Component polyurethane finish for wood and cork floors.

- Water-based polyurethane formula for extreme wear resistance
- Excellent build through high solid content
- Easy to use, no lap marks
- Non-yellowing

| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|-------------|-------|---|-----|-------------------|
| LO-FI-332 | Extra Matte | 1 gal | 4 | 144 | < 80 g/l |
| LO-FI-330 | Satin | 1 gal | 4 | 144 | < 130 g/l |
| LO-FI-331 | Semi-gloss | 1 gal | 4 | 144 | < 140 g/l |

2K Supra becomes 2K Duo.
Same product – new name.



2K Supra changes its name to 2K Duo for global unification.

2K Supra AT

Ceramic-reinforced water-based 2-Component polyurethane finish.

- Water-based polyurethane formula for extreme wear resistance
- Exceptional scratch resistance
- Excellent build through high solid content
- Non-yellowing
- Easy to use, no lap marks



| Item-#: | Variant | | | | US Regulatory VOC |
|-----------|------------|-------|---|-----|-------------------|
| LO-FI-157 | Satin | 1 gal | 4 | 144 | < 155 g/l |
| LO-FI-159 | Semi-gloss | 1 gal | 4 | 144 | < 155 g/l |
| LO-FI-100 | Gloss | 1 gal | 4 | 144 | < 230 g/l |

| | | |
|-------------|---------|--|
| | | |
| h | 2-3 | |
| sq ft / gal | 500-600 | |

2K InvisibleProtect AT

2-Component water-based thin film coating for hardwood floors.

- Looks and feels like natural untreated wood
- Very easy to apply
- Self sealing properties
- Excellent chemical resistance
- Non-ambering, keeps the natural appearance of the wood
- Creates the look of natural oil when used with 2K Intensive



| Item-#: | | | | US Regulatory VOC |
|-----------|-------|---|-----|-------------------|
| LO-FI-238 | 1 gal | 4 | 144 | < 140 g/l |

| | | |
|-------------|---------|--|
| | | |
| h | 4-6 | |
| sq ft / gal | 400-500 | |





Whitener

Additive for brightening wood surfaces.

- Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- Variable control of brightening intensity
- May be combined with all water-based sealer and finishes from LOBA
- Reduces the natural yellowing of the wood
- Provides individual design options
- Water-based technology, solvent-free
- Simple and safe application

| | | |
|-----------|-----------|----|
| Item-#: | | |
| LO-FI-294 | 2.7 fl oz | 15 |

| | Non-ambering | Light brightening | Medium brightening | Strong brightening |
|---------|--------------|-------------------|--------------------|--------------------|
| 2. Coat | | | ✓ | ✓ ✓* |
| 1. Coat | | ✓ | ✓ ✓* | ✓ ✓* |
| Primer | ✓ | ✓ | | ✓ |
| | | | | |

*Application with 2K InvisibleProtect AT



Amberizer

Amberizer is an additive to achieve the traditional look of an aged oil modified polyurethane finish with water-based coatings.

- Adds the look of oil-based finish
- Great to touch up and repair old floors
- Convenient package and great color consistency
- Suitable for all LOBA water-based finishes

| | | |
|-----------|---------|----|
| Item-#: | | |
| LO-FI-001 | 3 fl oz | 15 |



UV-Protect

Prevents the darkening of light colored wood under the influence of light.

- Maintains wood color for a long period
- Suitable for all LOBA finishes

| | | |
|-----------|-----------|----|
| Item-#: | | |
| LO-FI-052 | 3.4 fl oz | 15 |



Argo

Additive to prolong the working time.

- Reduces the risk of lap marks
- Does not change features of the finish

| | | |
|-----------|-----------|----|
| Item-#: | | |
| LO-FI-003 | 6.5 fl oz | 12 |



Stain

Stain for wood flooring based on solvents.

- Reduces the side bonding tendency of water-based finishes
- Easy application
- Fade resistant through the use of special colorants
- Accentuates the soft grain
- Very high coverage
- Can be coated with any LOBA water-based finish

| | |
|------------|---------|
| | |
| | 2 |
| sq ft / qt | 200-250 |

H

| Variant | | | | US Regulatory VOC |
|----------------|------|----|-----|-------------------|
| Various Colors | 1 qt | 12 | 600 | < 830 g/l |



Color samples are not binding



2K Contact

Water-based adhesion promoter for refinishing factory finished wood and cork floors without intermediate sanding.

- No sanding necessary – no dust
- The safest way to recoat textured, hand scraped and distressed surfaces
- Very high coverage

| | |
|------------|---------|
| | |
| | 1-2 |
| sq ft / qt | 500-600 |

H C

| Item-#: | | | | US Regulatory VOC |
|-----------|------|---|-----|-------------------|
| LO-FI-008 | 1 qt | 4 | 360 | < 240 g/l |

2K Contact - Dustless recoating system

4 simple steps, the C⁴ System

4 Coat:
Apply one coat of 2K Duo or 2K Supra AT using a LOBA Micro 120 Roller or Deluxe 120 Roller. Gloss finishes are not recommended. Use floor carefully for the first 3 days.

3 2K Contact:
Apply 2K Contact after the floor is dry and free of any dust.
Contact adhesion promoter is very simple. Just mix component A and B together and apply a thin coat of 2K Contact over the whole floor using a trim pad or heavy T-bar applicator. The coverage rate of 2K Contact is approximately 500-600 sq ft per quart. Allow to dry for a minimum of 2 hours before applying finish. Must be coated within 24 hours.

2 Clean:
For additional coats immediately after installation, clean the floor with Hardwood Floor Cleaner. For recoating an old, worn floor we recommend a deep cleaning with Remover, followed by Hardwood Floor Cleaner.
Deep Cleaning:
Apply Remover diluted in water (1:5)
• Clean the surface using a LOBA SpecialPad green pad on a buffing machine.
• Use a wet/dry vacuum or auto-scrubbing machine to remove the wet slurry created during the cleaning process.
• Mop the floor with Hardwood Floor Cleaner.

1 Certify:
To evaluate the success on your floor, perform a coin test and cross cut test before recoating. The final adhesion of the topcoat is reached after 3 days.
Sometimes older floors may have been treated with wax or might be contaminated with other substances. This test evaluates adhesion.

i Please consider the detailed technical information, application instructions and set-up recommendations.

With LOBA care and maintenance products, the beauty of your floors will persist.

2K ImpactOil Color

A durable 2-Component High-Solid oil for wood floors based on natural ingredients.

- 100% solids – solvent-free
- Natural satin appearance
- Excellent water resistance, also suitable for bathrooms, kitchens and other rooms exposed to high humidity
- Increased anti-slip class R10 according to DIN 51130
- Easy and ergonomic application
- Time-saving application in 1 day
- Very low consumption



| | |
|-----------------|---------|
| | |
| | 12 |
| sq ft / 0.75 kg | 150-250 |

H

| Variant | | | |
|----------------|---------|---|-----|
| Various Colors | 0.75 kg | 4 | 624 |

All colors are also available in 3.4 fl oz sample cans.
10610-90 / SampleSet / 17 x 3.4 fl oz + 5 x 3.4 fl oz PreTone



Color samples are not binding

Coloration with 2K ImpactOil Color

Standard recommendation for the coloring impregnation of wood floors.

- 1 If there are joints to be filled, Preparation according to steps 1 to 3 of the Easy Line; otherwise steps 1 and 3
- 2 First application of **2K ImpactOil Color** with LOBA Trowel, allow to penetrate
- 3 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige
- 4 Apply a second layer of **2K ImpactOil Color** with LOBA Trowel, allow to penetrate
- 5 After the penetration time, level out with a single-disc buffing machine and LOBASAND SpecialPad beige

i Please note the detailed technical information, processing instructions and set-up recommendations as well as technical tips and tricks „Sanding Instruction Staining of Wooden Floors“.

Discover the infinite color variety of **2K ImpactOil Color**, also in combination with PreTone.

With LOBA care and maintenance products, the beauty of your floors will persist.



Natural oils – nothing beats natural beauty.

Wood finishing in a fascinating variety of colors. Nothing brings out the warmth, naturalness and texture of wooden floors as beautifully as an oiled finish. The first-class oil system by LOBA accomplish this task sustainably. They are based on natural raw materials and convince by outstanding properties: their high wear resistance, moisture- and dirt-repellent formula as well as exceptional chemical resistance make LOBA products the ideal solution for the most demanding applications.



2K ImpactOil

High-solid oil-based on natural ingredients.

- 100% solids – solvent-free
- Natural satin appearance
- Excellent water resistance, also suitable for bathrooms, kitchens and other rooms exposed to high humidity
- Increased anti-slip class R10 according to DIN 51130
- Easy and ergonomic application
- Time-saving application in 1 day
- Very low consumption



| |
|------------------------|
| |
| h 12 |
| sq ft / 2.5 kg 400-500 |

H

| Item-#: | Variant | | | |
|-----------|-------------|--------|---|-----|
| LO-FI-058 | Transparent | 2.5 kg | 4 | 120 |

Stain



PreTone


Water-based pigment stain for wooden floors.

- Allows an infinite amount of customization
- Intensifies light colors
- Reduces oil-specific amberizing
- Easy and safe application
- Solvent-free and odor-neutral
- Unlimited color combinations

| |
|----------------------|
| |
| h 12-24 |
| sq ft / 2.5l 275-325 |

H

| Variant | | | |
|----------------|-------|---|-----|
| Various Colors | 2.5 l | 6 | 216 |

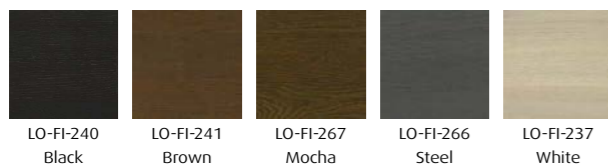

Color samples are not binding

1. European Wood Species

| Wood Species | 2K ImpactOil |
|--------------------------------|--------------|
| Acacia / Yellow Locust | + |
| Acacia / Yellow Locust steamed | + |
| Alder | + |
| Ash | + |
| Beech natural | + |
| Beech steamed | + |
| Birch | + |
| Black cherry | + |
| Cherry (European) | + |
| Chestnut tree | + |
| Elm | + |
| Larch | + |
| Maple (Canadian) | + |
| Maple (European) | + |
| Olive tree | + |
| Pear tree | ◇ |
| Pine | + |
| Smoked oak | + |
| Spruce | + |
| Walnut (European) | + |
| White Oak | + |


2. Exotic Wood Species

| Wood Species | 2K ImpactOil |
|---------------------------|--------------|
| Afromosia / Kokrodua | + |
| Arrurra Vermelho | + |
| Cabreuva | + |
| Camwood | + |
| Coconut | + |
| Cumaru / Almendrilla | + |
| Cypress | ◇ |
| Doussie / Afzelia | + |
| Eucalyptus / Jarrah | + |
| Eucalyptus / Spotted Gum | + |
| Guatambu | + |
| Hard Pine (new floors) | + |
| Ipe / Lapacho / Guaycan | ◇ |
| Iroko / Kambala | + |
| Iron Wood | + |
| Jatoba / Brazilian Cherry | + |
| Kotibe / Mahogany | + |
| Mahogany | + |
| Mahogany Acajou | + |
| Massaranduba | + |
| Mecrusse | + |
| Moluccan Ironwood | + |
| Muhuhu | + |
| Opepe | + |
| Partridge Wood | + |
| Piguia Marfin | + |
| Pitch Pine (old floors) | + |
| Purpleheart | + |
| Rubberwood | + |
| Sucupira | + |
| Tasmanien Oak | + |
| Teak | + |
| Wenge | + |

3. Other surfaces apart from hardwood

| | |
|-----------|---|
| Multiplex | + |
| Chipboard | ◇ |
| OSB Board | ◇ |

- + = Without limitation applicable
- ◇ = Application can cause problems. Consult LOBA prior to use
- = Use is not recommended

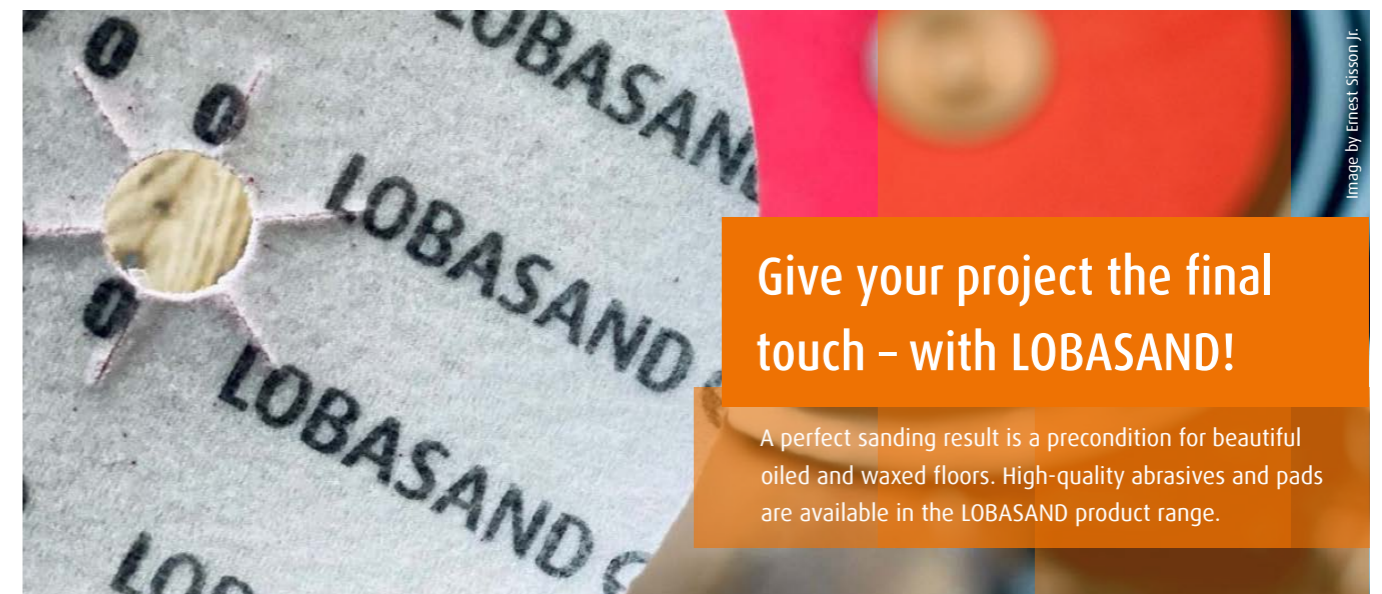

Give your project the final touch – with LOBASAND!

A perfect sanding result is a precondition for beautiful oiled and waxed floors. High-quality abrasives and pads are available in the LOBASAND product range.



DeckOil

Oil impregnation for wood surfaces in outdoor areas

- Deep protection against UV radiation, frost and moisture
- Good penetration behavior, effective deep protection
- Simple and safe application
- Also suitable for protecting outdoor furniture
- Applicable on smooth and grooved planks
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children's toys as per EN 71-3



| |
|----------------------|
| |
| h 12 |
| sq ft / 2.5l 105-270 |

H

| Item-#: | Variant | | | |
|-----------|-------------|-------|---|-----|
| LO-FI-298 | Transparent | 2.5 l | 4 | 120 |



DeckOil Color

Oil impregnation for wood surfaces in outdoor areas


- Deep protection against UV radiation, frost and moisture
- Good penetration behavior
- Easy and safe application
- Also suitable for protecting outdoor furniture
- Applicable on smooth and grooved planks
- Certified anti-slip properties as per DIN 51130 for work areas
- Suitable for children's toys as per EN 71-3



| |
|----------------------|
| |
| h 12 |
| sq ft / 2.5l 105-270 |


H

| Variant | | | |
|----------------|-------|---|-----|
| Various Colors | 2.5 l | 4 | 120 |

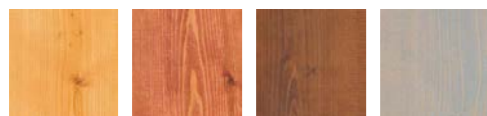

LO-FI-300 Light Brown LO-FI-299 Red Brown LO-FI-301 Dark Brown LO-FI-302 Grey

Color samples are not binding

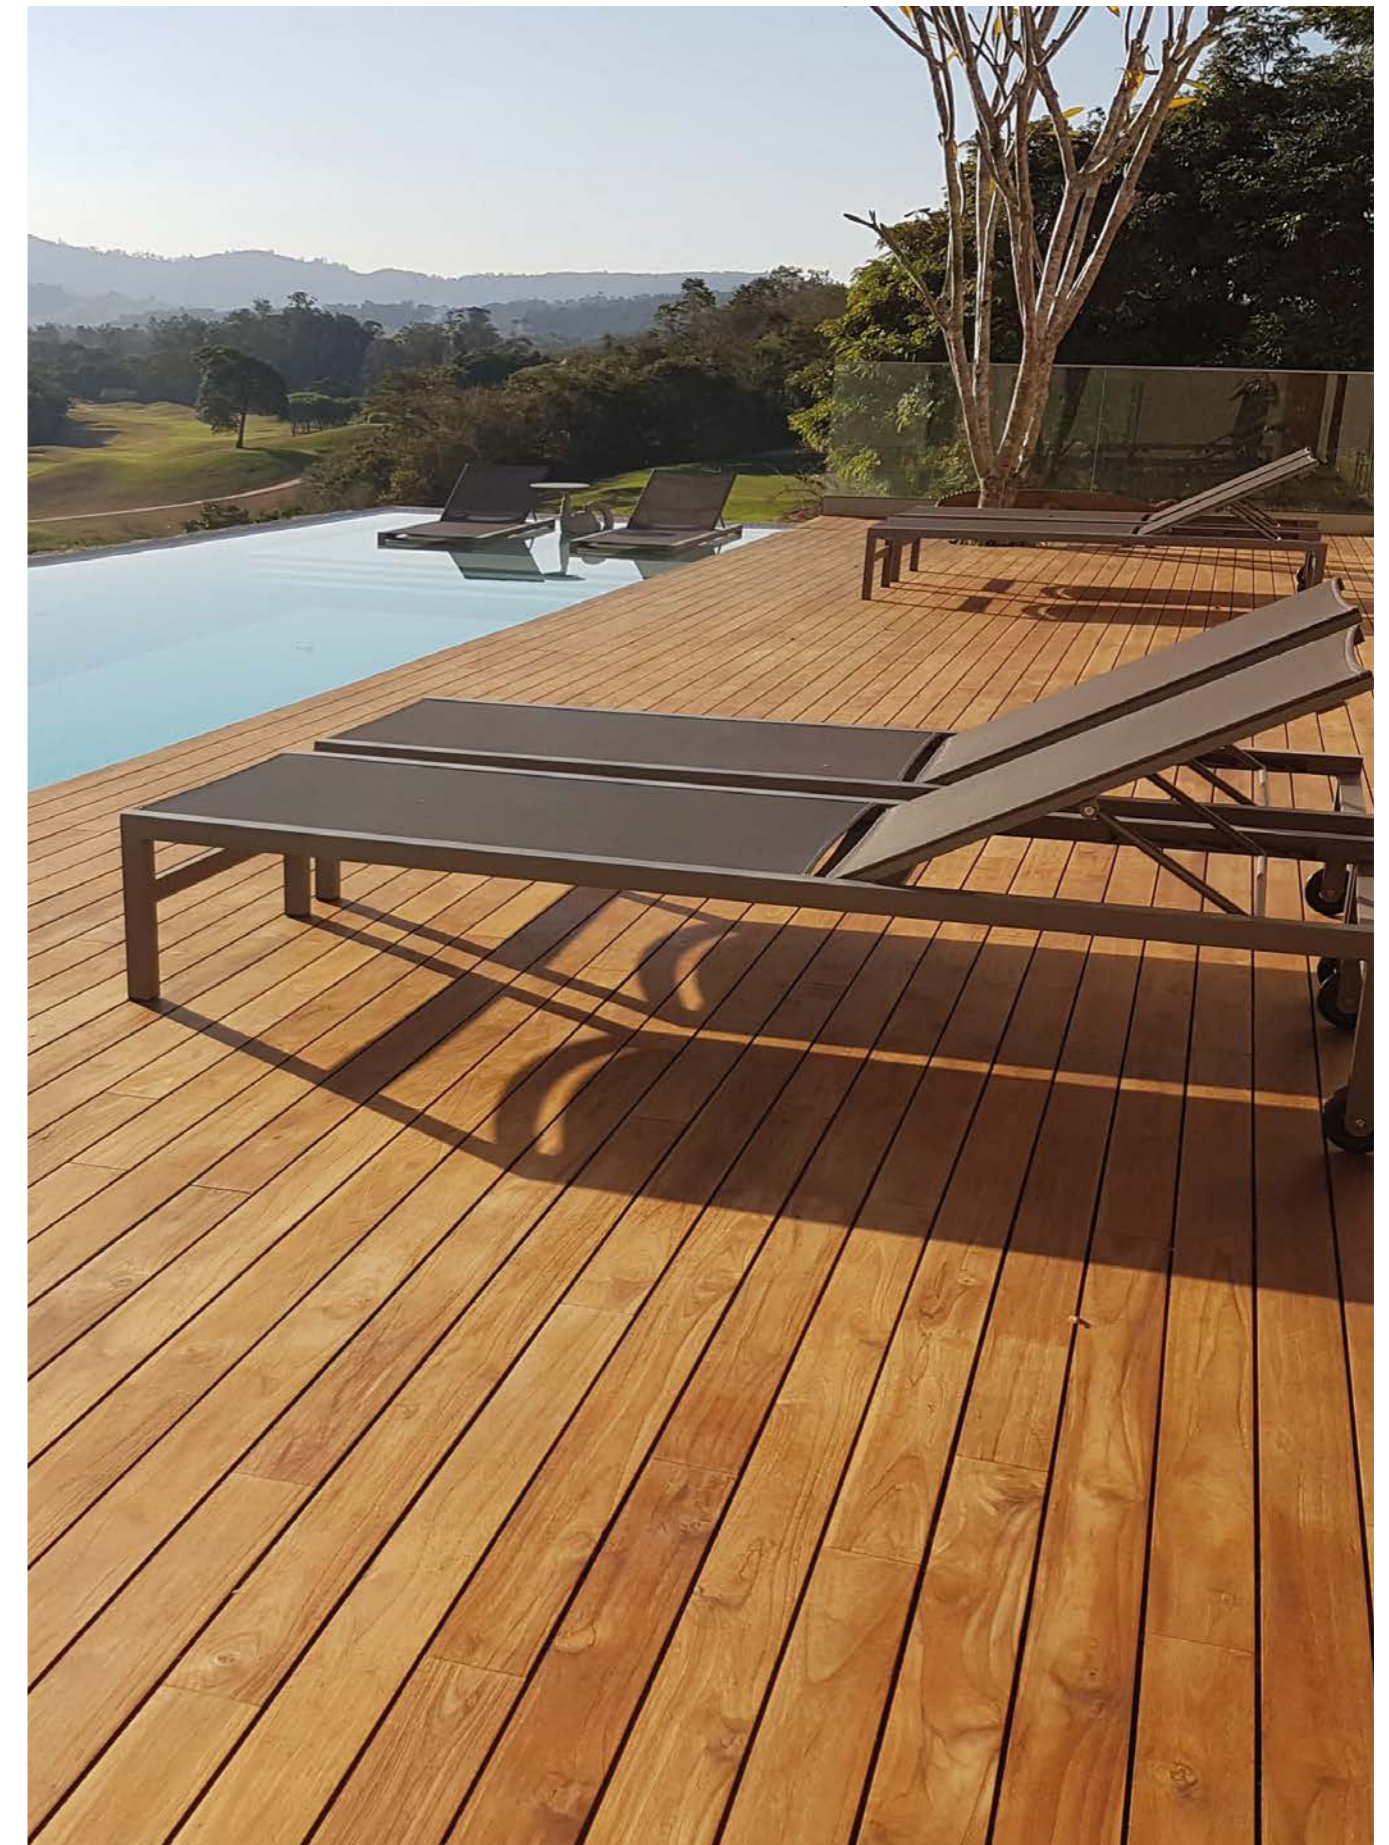

Cleaning and maintenance products for professional use.

Gentle protection for beautiful floors. LOBA thinks beyond the finishing of valuable flooring. In order to optimally protect the finish and maintain it for as long as possible, we offer top-quality care and cleaning products for professional users. Besides our own expertise, our care products, oils, waxes, soaps and cleaners also contain the best raw materials available. Caring and cleaning with LOBA for those who think long-term!



ParkettSoap R2U

ParkettSoap R2U is a ready to use cleaning solution for the deep cleaning of wood surfaces which are treated with oxidizing oils.

- Ready to use, no mixing required
- Removes grey and faded layers after exposure to sunlight
- Great for indoor and outdoor use
- Water-based yet powerful formula to remove residue and dirt

| | |
|-------------|------|
| | |
| | 12 |
| sq ft / gal | 1000 |

H C

| Item-#: | | | |
|-----------|-------|---|-----|
| LO-MA-010 | 1 gal | 4 | 200 |



Remover

Low-foaming, deep cleaning concentrate for heavily soiled floors and to break down and remove layers of old floor care products.

- Strong cleaning ability
- Does not leave streaks or residues
- Breaks down most care and maintenance products
- pH-neutral water-based formula

| | |
|------------|----------|
| | |
| | 30-60 |
| sq ft / qt | 500-1000 |

H C L

| Item-#: | | | |
|-----------|------|----|-----|
| LO-MA-009 | 1 qt | 12 | 576 |

Care products for finished floors



FloorCare

Water-based floor care product.

- Provides a protective layer
- Can be removed without sanding
- VOC compliant
- Excellent adhesion
- Easy to apply

| | |
|------------|-------|
| | |
| | 30-60 |
| sq ft / qt | 250 |

H C L P

| Item-#: | Variant | | | |
|-----------|------------|------|----|-----|
| LO-MA-002 | Satin | 1 qt | 12 | 576 |
| LO-MA-003 | Semi-gloss | 1 qt | 12 | 576 |



NatureOil

Water-based maintenance oil.

- Ready to use, solvent-free and soap-free
- Reliably retains the matte finish of oiled hardwood floors
- Ideal for treating the whole floor or touching up smaller areas
- Simple application with cloth or sponge

| | |
|------------|----------|
| | |
| | 4-6 |
| sq ft / qt | 350-1000 |

H

| | | | |
|-----------|------|----|-----|
| Item-#: | | | |
| LO-FI-115 | 1 qt | 15 | 540 |



ParkettOil

Maintenance oil-based on solvents.

- Retains the matte finish of oiled floors
- No self-polishing
- Suitable as spot treatment
- Removes wear marks

| | |
|------------|----------|
| | |
| | 12 |
| sq ft / qt | 800-1000 |

H

| | | | |
|-----------|------|---|-----|
| Item-#: | | | |
| LO-MA-007 | 1 qt | 6 | 480 |

Outdoor



WPC Refresh

Maintenance oil-based on solvents.

- Optical upgrading for WPC and oiled wood surfaces
- Brings back the silky matte look
- Easy and safe application
- Suitable for WPC and oiled wood surfaces

| | |
|------------|----------|
| | |
| | 12 |
| sq ft / qt | 340-1000 |

H

| | | | |
|-----------|-------|---|--|
| Item-#: | | | |
| LO-FI-307 | 1 qt. | 6 | |



DeckDegrayer

Special cleaner for wooden surfaces in outdoor areas.

- Ideal degreasing preparation for follow-up treatment
- Easy and safe application
- Can be used on horizontal and vertical surfaces and outdoor furniture, does not drip
- No sanding necessary
- Applicable for all wood species

| | |
|--------------|---------|
| | |
| | 10 |
| sq ft / 2.5l | 135-180 |

H

| | | | |
|-----------|-------|---|-----|
| Item-#: | | | |
| LO-FI-306 | 2.5 l | 6 | 144 |



DeckCleaner

Maintenance cleaner for outdoor areas.

- Can be used on horizontal and vertical surfaces and outdoor furniture, does not drip
- Very productive
- Suitable for oiled and finished wood and WPC

| | |
|--------------|---------|
| | |
| | 60 |
| sq ft / 2.5l | 110-540 |

H

| | | | |
|-----------|-------|---|-----|
| Item-#: | | | |
| LO-FI-305 | 2.5 l | 6 | 144 |



DeckRefresh

Water-based wipe care for outdoor areas.

- Thorough, gentle wipe care
- Gives the surface a silky sheen
- Easy and safe application
- No remover necessary due to a self-emulsifying formula
- Suitable for oiled and finished wood surfaces in outdoor areas

| | |
|--------------|--------|
| | |
| | 30 |
| sq ft / 2.5l | 30-550 |

H

| | | | |
|-----------|-------|---|-----|
| Item-#: | | | |
| LO-FI-304 | 2.5 l | 6 | 144 |

LOBAHOME

Floor care products designed by professionals, customized for homeowners.

First-class floor care for home use. Maintaining your wood floor like an expert does not have to be a challenge, as long as you have the right products at hand. LOBAHOME care products combine our experience from the professional sector with an easy application for home use. The Universal Floor Cleaner line has been developed especially for fast, intensive care and cleaning of wood floors. Just apply, wipe and you're done!



LOBA Mop

Suitable for the application of the LOBAHOME products. The high quality microfiber cover is washable at 140 degrees F.

| Item-#: | Dimensions |  |
|-----------|-------------------|---|
| LO-MA-035 | extendable 2-5 ft | 24 |



Universal Floor Cleaner

Ready to use, pH neutral cleaner.

- Very high yield concentrated cleaning solution
- Hygienic
- Dries without streaks
- Does not leave any residue
- Environmentally friendly

| Item-#: |  |  |  |
|-----------|---|---|---|
| LO-MA-005 | 1 qt | 12 | 576 |



Universal Floor Cleaner Concentrate

The cleaning solution from the professional for all hard floor surfaces. Powerful results with a fresh clean scent. The formula contains natural ingredients which provide a longer lasting clean to your floor.

| Item-#: |  |  |  |
|-----------|---|---|---|
| LO-MA-008 | 1 qt | 12 | 576 |



SprayMop Set

Practical mop with integrated spray system specially developed for the cleaning of all hard surface floor coverings. Fast and easy cleaning, no bucket required.

| Item-#: | Description | | |
|-----------|---|----|-----|
| LO-MA-019 | refillable reservoir for approx. 25 fl oz | 12 | 192 |



Refill

1 bottle of 8.5 fl. ozs provides you with enough liquid for 4 refills of the LOBA Spray Mop cartridge. Also available as counter display incl. 12 x Refill 8.5 fl oz.

| Item-#: | | |
|-----------|-----------|----|
| LO-MA-018 | 8.5 fl oz | 45 |



Mop Cover

Microfiber mop cover for LOBAHOME SprayMop and Mop. Washable up to 140 F.

| Item-#: | Dimensions | |
|-----------|---------------------------------|---|
| LO-MA-020 | microfiber mop cover 5.5" x 17" | 1 |

SprayMop Set

Fast and easy cleaning with excellent results!

Our tips for your long-lasting flooring:

- Use doormats at all exterior doors and interior door areas when possible. This will help remove loose debris from shoes before entering the home.
- Install felt glides on your chairs and any furniture that may be moved frequently to avoid scratching.
- Any furniture with casters should be protected with felt glides.
- Avoid carpet underlays, furniture feet, and chair casters, etc. that contain plasticizers. This can often cause softening and discoloration of the surface.
- Keeping a controlled climate space is also ideal for your floor especially wood which can expand and contract from heat and sunlight.

Premium quality sanding products and pads.

The various sanding phases of a new hardwood installation or a hardwood renovation have a considerable influence on the final result. With our LOBASAND product range, we offer professionals a widerange of top-quality abrasives and pads. The high-performance materials and carrier technologies used guarantee effective working with all common machines for best results.

SAND STRONG. FINISH EASY.



1. Abrasives

| Product | Dimensions | Shape | * | Coarse sanding | | | Medium sanding | Fine sanding | | | Final sanding | | | Intermediate sanding | | |
|---------------|------------|-------|---|----------------|-----|-----|----------------|--------------|------|--|---------------|--|--|----------------------|--|--|
| | | | | P36 | P40 | P60 | P80 | P100 | P120 | | | | | | | |
| Belt | 8" | ⊖ | ■ | | | | | | | | | | | | | |
| | 8" | ⊖ | ■ | | | | | | | | | | | | | |
| | 10" | ⊖ | ■ | | | | | | | | | | | | | |
| | 8" | ⊖ | ■ | | | | | | | | | | | | | |
| | 10" | ⊖ | ■ | | | | | | | | | | | | | |
| Velcro Disc | 6" | ⊙ | ■ | | | | | | | | | | | | | |
| | 7" | ⊙ | ■ | | | | | | | | | | | | | |
| | 7" | ⊙* | ■ | | | | | | | | | | | | | |
| | 8" | ⊙ | ■ | | | | | | | | | | | | | |
| | 6" | ⊙ | ■ | | | | | | | | | | | | | |
| | 7" | ⊙ | ■ | | | | | | | | | | | | | |
| | 7" | ⊙* | ■ | | | | | | | | | | | | | |
| | 8" | ⊙ | ■ | | | | | | | | | | | | | |
| | 5" | ⊙ | ■ | | | | | | | | | | | | | |
| | 6" | ⊙ | ■ | | | | | | | | | | | | | |
| | 7" | ⊙* | ■ | | | | | | | | | | | | | |
| | 7" | ⊙ | ■ | | | | | | | | | | | | | |
| | 8" | ⊙ | ■ | | | | | | | | | | | | | |
| PerforatedPad | 16" | | | | | | | | | | | | | | | |
| | 5" | | | | | | | | | | | | | | | |

* Key:
■ Zirconia ■ Aluminum oxide ■ Ceramic

2. Pads

| Product | Color | Dimensions | Area of use |
|------------|-------|------------|---------------------------------------|
| HandPadSet | beige | 3.5" x 5" | Equalizing |
| SpecialPad | beige | 16" | Equalizing |
| SpecialPad | green | 16" | Basic cleaning / intermediate sanding |
| SpecialPad | white | 16" | Polishing |
| DustPad | | 16" | Dust reduction |
| | | 5" | Dust reduction |



Belt

For conventional belt sanders.
 Aluminium oxide: CLASSIC - Softer cutting and finer scratch pattern. Price conscious.
 Zirconia: DYNAMIC - Fast cutting and stockremoval. Aggressive, long lasting.
 Ceramic: PREMIUM - Sharp, aggressive and consistent scratch pattern.

- Sold in complete package units only

| Item-#: | Dimensions | Material | Grit | |
|----------------|------------|------------------------|------------------------------|----|
| various grains | 8" | ceramic (orange) | 36/40/50/60/80/100/120 | 10 |
| various grains | 8" | zircon corundum (blue) | 24/36/40/50/60/80/100/120 | 10 |
| various grains | 10" | zircon corundum (blue) | 24/36/40/50/60/80/100/120 | 10 |
| various grains | 8" | aluminium oxide (red) | 16/24/36/40/50/60/80/100/120 | 10 |
| various grains | 10" | aluminium oxide (red) | 24/40/60/80/100/120 | 10 |



Velcro Disc

Velcro sanding discs for conventional disc sanding machines with pad holder diameters of 6", 7", and 8". With Velcro reverse for disc changes in seconds.

- Sold in complete package units only

| Item-#: | Dimensions | Material | Grit | |
|----------------|------------------|------------------------|------------------------------|----|
| various grains | ø 6" | ceramic (orange) | 24/36/40/60/80/100/120 | 50 |
| various grains | ø 7" center hole | ceramic (orange) | 16/24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 7" | ceramic (orange) | 24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 8" | ceramic (orange) | 60/80/100/120 | 50 |
| various grains | ø 6" | aluminium oxide (red) | 24/36/40/60/80/100/120 | 50 |
| various grains | ø 7" center hole | aluminium oxide (red) | 16/24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 7" | aluminium oxide (red) | 16/24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 8" | aluminium oxide (red) | 60/80/100/120 | 50 |
| various grains | ø 5" | zircon corundum (blue) | 60/80/100/120 | 50 |
| various grains | ø 6" | zircon corundum (blue) | 24/36/40/60/80/100/120 | 50 |
| various grains | ø 7" | zircon corundum (blue) | 24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 7" center hole | zircon corundum (blue) | 24/36/40/50/60/80/100/120 | 50 |
| various grains | ø 8" | zircon corundum (blue) | 60/80/100/120 | 50 |



Adhesive Disc

For the retrofitting of sanding discs on circular sanding machines.

| Item-#: | Dimensions | |
|-----------|------------|----|
| LO-SD-002 | ø 6" | 50 |
| LO-SD-003 | ø 7" | 50 |



PerforatedPad & DustPad

PerforatedPad: Offers improved sanding performance and shortens time required for sanding. Reduces dust from the sanding process entering the atmosphere. Exceptionally long service life owing to continuous dust extraction.
 DustPad: For use under PerforatedPad. Dust passes through the permeable material of the DustPad and is collected in the dust accumulator. The sanding disc will not clog up, thus guaranteeing an absolutely optimal sanding performance.

- Sold in complete package units only

| Item-#: | Description | Dimensions | Grit | |
|----------------|---------------|------------|--------------------|----|
| LO-SD-143 | DustPad | ø 5" | - | 5 |
| LO-FI-138 | DustPad | ø 16" | - | 5 |
| various grains | PerforatedPad | ø 5" | 80/100/120/150/180 | 10 |
| various grains | PerforatedPad | ø 16" | 80/100/120/150/180 | 10 |



SpecialPad

Pads for single-disc machines for various areas of application.
 Beige (mildly abrasive): e.g. for evening out oils and colors
 Green (moderately abrasive): e.g. for thorough cleaning
 White (non-abrasive): e.g. for polishing waxes

- Sold in complete package units only

| Item-#: | Description | Dimensions | |
|-----------|-------------|------------|----|
| LO-SD-001 | white | ø 16" | 10 |
| LO-FI-285 | beige | ø 16" | 10 |
| LO-FI-287 | green | ø 16" | 10 |



HandPadSet

For manual equalisation of excess material in hard-to-reach areas.
 Beige (mildly abrasive): e.g. for evening out oils and colors

- Inclusive 25 Pads beige

| Item-#: | Dimensions | |
|-----------|------------|---|
| LO-FI-022 | 3.5" x 5" | 1 |


LOBATOOL

Tools and accessories – only the best for professionals!

Tested quality for first-class results. Since tools are effectively an “extended arm of the craftsman”, they are hugely important. You can expect the best from LOBA in this field, too. This is why we extensively test every applicator and tool before it is added to the LOBA product line. Our uncompromising quality standards provide the certainty of being able to work easily, safely and fast on the construction site in tough everyday situations. You can rely on LOBA!


LOBADUR

| | Oil Roller | Water-based Finish Roller | | |
|------------------------|-------------------|---------------------------|-----------------|-----------------|
| | Micro 60-80 | Micro 120 | Universal 100 | Deluxe 120 |
| | Item No.: 16236-1 | Item No.: 16236 | Item No.: 16233 | Item No.: 16234 |
| Rush | - | - | ✓ | - |
| 2K Supra AT | - | ✓ | - | ✓ |
| 2K Duo | - | ✓ | - | ✓ |
| 2K InvisibleProtect AT | - | * | - | ✓ |
| Hybrid | - | ✓ | - | ✓ |
| EasyFinish | - | ✓ | - | ✓ |
| Viva | - | ✓ | - | ✓ |
| Life | - | ✓ | - | ✓ |
| EasyPrime | - | ✓ | - | - |
| 2K Intensive | ✓ | * | - | - |


LOBASOL

| | | | | |
|--------------------------|---|---|---|---|
| 2K ImpactOil Transparent | ✓ | - | - | - |
|--------------------------|---|---|---|---|

- ✓ = Without limitation applicable
- = Use is not recommended
- * = Please refer to the Technical Information

Roller Deluxe 120

For all LOBA water-based finishes. Ensures the recommended quantity (approx. 375-400 sq ft / gal). No roller frame included.



| Item-#: | Description | |
|-----------|-------------|----|
| LO-FI-116 | 10" roller | 12 |

Roller Micro 120


For all LOBA water-based finishes, as well as EasyPrime. Application quantity between 400-600 sq ft / gal. No roller frame included.



| Item-#: | Description | |
|-----------|-------------|----|
| LO-FI-031 | 10" roller | 12 |

Roller Universal 100

For Rush. Application quantity approx. 400-500 sq ft / gal. No roller frame included.



| Item-#: | Description | |
|-----------|-------------|----|
| LO-FI-126 | 10" roller | 12 |

Edge roller

Roller for edges and other hard-to-reach areas.



| Item-#: | Description | |
|-----------|-------------|----|
| LO-FI-016 | 4" roller | 10 |

Roller Micro 60-80

For the roller application of oils (LOBA oils and 2K Intensive). Application quantity between 400-540 sq ft / 2.5 kg. No roller frame included.



| Item-#: | Description | |
|-----------|-------------|----|
| LO-FI-032 | 10" roller | 12 |

Roller frame, roller extension pole

Roller frame: for finish rollers.
Telescopic bar: roller extension. Can be extended up to 8 ft.



| Item-#: | Description | |
|-----------|------------------------------------|----|
| LO-FI-127 | Telescopic bar expandable 4-6.5 ft | 10 |
| LO-FI-077 | Roller frame for 10" roller | 20 |
| LO-FI-017 | Roller frame for 4" edge roller | 20 |

Rollerbox 10"

Clean storage of rollers.



| Item-#: | Dimensions |  |
|-----------|------------|---|
| LO-FI-033 | 10" | 50 |

Wiping cloth

Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for cleaning tools and machines.

- Sold in complete package units only



| Item-#: | Dimensions |  |
|-----------|------------|---|
| LO-MA-013 | 20" x 24" | 10 |

Trowel

Applicator for filler products, oils, waxes, coloring systems and sealers.



| Item-#: | Description | Dimensions |  |
|-------------|-----------------|----------------|---|
| LO-FI-05... | Stainless steel | 10.5" / 13.75" | 6 |

Oilbrush

Applicator for use with Deck Line products



| Item-#: | Dimensions |  |
|-----------|------------|---|
| LO-MA-032 | 8" | 1 |

Coating bucket, inlay liner

Bucket with lid and measuring scale. PE liners for the coating bucket.



| Item-#: | Description |  |
|-----------|----------------------------------|---|
| LO-FI-005 | Bucket filling quantity 4.75 gal | 1 |
| LO-FI-268 | Inlay liner | 25 |

Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.



| Item-#: | Description | Dimensions |  |
|-----------|---------------------------|--------------|---|
| LO-FI-055 | Applicator/Applicator pad | 4.5 ft / 17" | 20/100 |

Spray can

Simple application of cleaning and maintenance products.



| Description | |
|----------------------|---|
| Filling quantity 1 l | 1 |

Miscellaneous

RepairSet

Set with different colors. The solution for all smaller repairs of parquet, multi-layer parquet, laminate and cork flooring. colors are mixable. Includes wedge scraper, hot knife and abrasive fabric.
 RepairRefill Set: Set of 20 sticks of coatable hard wax to refill LOBA RepairSet



| Item-#: | Variant | Description | |
|-----------|----------------|------------------|---|
| LO-FI-295 | Various Colors | RepairSet | - |
| LO-FI-293 | Various Colors | RepairRefill Set | 1 |


ElastoParkett

Acrylic-based, silicone-free joint filler.

- High filling capacity
- Facilitates fast and efficient working
- High elasticity
- Can be sanded and finished over
- Can be used on oiled as well as finished wood and cork floors



| Variant | | |
|----------------|---------|----|
| Various Colors | 10.5 oz | 12 |

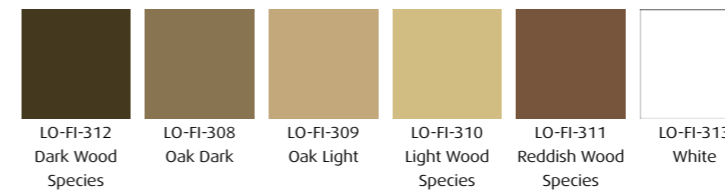

Color samples are not binding

Canister Opener

Convenient tool for opening LOBA canisters.

- Highly stable due to ABS plastic
- Ergonomic shape, rounded edges
- Increased leverage effect due to long handle
- No slipping off the lid due to exact fit
- Hole at the end of the handle for hanging up or attaching to work clothes



| Item-#: | | |
|-----------|---|--|
| LO-MI-014 | 1 | |

2023 classes

Loba-Wakol Connected Systems

This is a three-day hands-on course offering education on WAKOL prep and installation systems followed by LOBA sanding, coloring, and finishing solutions.

Wakol Substrate Prep & Resilient Install

Two-day WAKOL hands on introductory course on how to prepare a substrate to receive resilient flooring, and basic resilient installation.

Substrate Prep & Underlayment

Two-day in-depth course on substrate preparation including WAKOL acoustic underlayment.



Discover the LOBA-Wakol App for North America

Always On-Site. Find answers to your everyday questions quickly.



Play Store



App Store

Legend



Advanced Technology (AT) represents the latest generation of LOBA products with revolutionary technologies, innovative raw materials and/or improved application. These products have outstanding properties that are unique in the industry. AT products are low-emission (VOC < 80g/L) and meet all current employment and consumer protection requirements.



EMICODE® EC1R Plus: very low emission



EMICODE® EC2: low emission



LOBASOL® 100% Nature solvent free and 100% solid content



Emission tested building materials acc. French VOC regulation



EMICODE® EC1R: very low emission



Suitable for children's toys according to DIN EN 71-3



Connected Systems: Guarantee for systems of LOBA coatings and Wakol adhesives



Stress zone



EMICODE® EC1: very low emission



Emissions-tested building product in accordance with DIBT guidelines



SCAQMD Rule 1113 "South California Air Quality Management District rule 1113": Norm which sets the limit to 275 g/l VOC according to US regulatory VOC.



Brush application



Wipe



Drying time



Hardwood



Roller application



Apply coat



sq ft/gallon Consumption in gallon



Cork



Trowel



Thorough cleaning



Contents



Linoleum



T-bar



Apply with cloth



Packing



PVC



Care applicator



Trim-Pad



Pallet



Contact training@loba-wakol.com for more details. Register online at www.loba-wakol.com under the Technical Trainings tab.



Loba Wakol LLC
2732 Hwy 74 West
Wadesboro, NC 28170
Phone: (800) 230-6456
Email: info@loba-wakol.com
www.loba-wakol.com

→ This catalog was printed on paper from sustainable forestry with inks based on organic oil.