
Revision: 15.01.2024

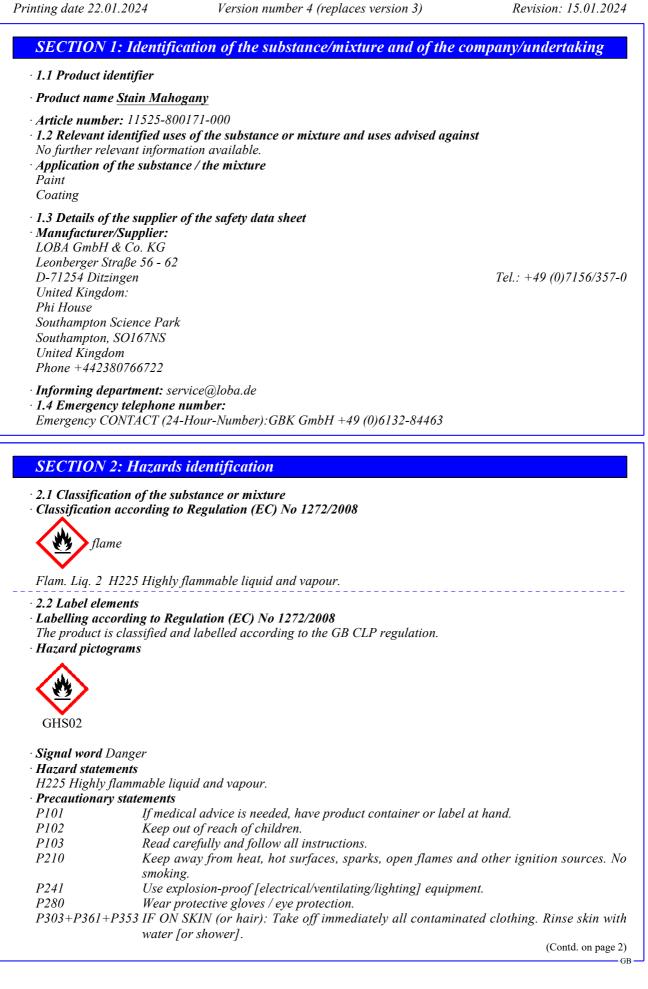

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

#### Product name Stain Mahogany

P501 • <b>2.3 Other h</b> a	present and eas Dispose of con regulations. azards PBT and vPvB assessme oplicable.	inse cautiously with water for several minutes. Remove conta y to do. Continue rinsing. tents/container in accordance with local/regional/national/ir	
· 3.2 Mixture	<b>s</b> : Mixture of the substan	<b>iformation on ingredients</b> aces listed below with harmless additions.	
CAS: 64-17- EINECS: 20 Index numbe	-5	ethanol Flam. Liq. 2, H225; $\bigcirc$ Eye Irrit. 2, H319 Specific concentration limit: Eye Irrit. 2; H319: $C \ge 50 \%$	25-50%
CAS: 34590 EINECS: 25 Reg.nr.: 01-	, , <b>,</b>	Dipropylene glycol monomethyl ether substance with a Community workplace exposure limit	25-50%
		butanone	<0.5%

• Additional information For the wording of the listed hazard phrases refer to section 16.

## **SECTION 4: First aid measures**

• 4.1 Description of first aid measures

- After inhalation Supply fresh air; consult doctor in case of symptoms.
- · After skin contact The product is not skin irritating.
- · After eye contact Rinse opened eye for several minutes under running water.
- After swallowing In case of persistent symptoms consult doctor.
- 4.2 Most important symptoms and effects, both acute and delayed No further relevant information available.
- 4.3 Indication of any immediate medical attention and special treatment needed

No further relevant information available.

### **SECTION 5: Firefighting measures**

· 5.1 Extinguishing media

• Suitable extinguishing agents CO2, sand, extinguishing powder. Do not use water.

- For safety reasons unsuitable extinguishing agents Water.
- *Water with a full water jet.*
- 5.2 Special hazards arising from the substance or mixture No further relevant information available.
- 5.3 Advice for firefighters
- · Protective equipment: No special measures required.

### **SECTION 6:** Accidental release measures

• 6.1 Personal precautions, protective equipment and emergency procedures Wear protective equipment. Keep unprotected persons away.

(Contd. on page 3)

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

#### Product name Stain Mahogany

	(Contd. of page 2)
6.2 Environmental precautions:	
Do not allow product to reach sewage system or water bodies.	
Prevent material from reaching sewage system, holes and cellars.	
Inform respective authorities in case product reaches water or sewage system.	
6.3 Methods and material for containment and cleaning up:	
Absorb with liquid-binding material (sand, diatomite, acid binders, universal binder	rs, sawdust).
Ensure adequate ventilation.	
Do not flush with water or aqueous cleansing agents	
6.4 Reference to other sections	
See Section 7 for information on safe handling	
See Section 8 for information on personal protection equipment.	
See Section 13 for information on disposal.	
SECTION 7. Handling and storage	
SECTION 7: Handling and storage	
7.1 Precautions for safe handling	
Keep containers tightly sealed.	
Store in cool, dry conditions in well sealed containers.	
Information about protection against explosions and fires:	
Keep ignition sources away - Do not smoke.	
Protect against electrostatic charges.	
7.2 Conditions for safe storage, including any incompatibilities	
Storage	

• Requirements to be met by storerooms and containers: Store in cool location.

- Information about storage in one common storage facility: Not required.
- Further information about storage conditions: Keep container tightly sealed. Store in cool, dry conditions in well sealed containers.
- · Storage class 3
- · 7.3 Specific end use(s) No further relevant information available.

## **SECTION 8: Exposure controls/personal protection**

· 8.1 Control parameters

· Components with critical values that require monitoring at the workplace:

64-17-5 ethanol

WEL Long-term value: 1920 mg/m<sup>3</sup>, 1000 ppm

34590-94-8 Dipropylene glycol monomethyl ether

WEL Long-term value: 308 mg/m<sup>3</sup>, 50 ppm Sk

#### 78-93-3 butanone

WEL Short-term value: 899 mg/m<sup>3</sup>, 300 ppm Long-term value: 600 mg/m<sup>3</sup>, 200 ppm Sk, BMGV

### · Ingredients with biological limit values:

#### 78-93-3 butanone

BMGV 70 µmol/L Medium: urine Sampling time: post shift Parameter: butan-2-one

• Additional information: The lists that were valid during the compilation were used as basis.

#### · 8.2 Exposure controls

• Appropriate engineering controls No further data; see section 7.

(Contd. on page 4)

GB

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

(Contd. of page 3)

#### Product name Stain Mahogany

<ul> <li>Individual protection measures</li> </ul>	, such as persona	l protective equipment
----------------------------------------------------	-------------------	------------------------

- · General protective and hygienic measures Wash hands during breaks and at the end of the work.
- Breathing equipment: Not required.

### · Hand protection

Protective gloves.

The glove material has to be impermeable and resistant to the product/ the substance/ the preparation. Selection of the glove material on consideration of the penetration times, rates of diffusion and the degradation

#### · Material of gloves

Nitrile rubber, NBR

The selection of the suitable gloves does not only depend on the material, but also on further marks of quality and varies from manufacturer to manufacturer. As the product is a preparation of several substances, the resistance of the glove material can not be calculated in advance and has therefore to be checked prior to the application.

Recommended thickness of the material:  $\geq 0.4 \text{ mm}$ 

· Penetration time of glove material

The exact break trough time has to be found out by the manufacturer of the protective gloves and has to be observed.

For the mixture of chemicals mentioned below the penetration time has to be at least 480 minutes (Permeation according to EN 374 Part 3: Level 6).

*Value for the permeation:*  $Level \le 6$ 

· Eye/face protection Tightly sealed safety glasses.

## **SECTION 9: Physical and chemical properties**

• 9.1 Information on basic physical and chemical p	properties
· General Information	
· Physical state	Fluid
· Colour:	According to product specification
· Smell:	Recognisable
• Odour threshold:	Not determined.
• Melting point/freezing point:	Not determined
· Boiling point or initial boiling point and boiling	
range	Not determined
· Flammability	Highly flammable.
Lower:	Not determined.
· Upper:	Not determined.
· Flash point:	17 °C
· Decomposition temperature:	Not determined.
· pH	Not determined.
· Viscosity:	
· Kinematic viscosity	Not determined.
· dynamic:	Not determined.
Solubility	
· Water:	Not miscible or difficult to mix
· Partition coefficient n-octanol/water (log value)	Not determined.
· Steam pressure:	Not determined.
· Density and/or relative density	
· Density at 20 °C	$0.88 \ g/cm^3$
Relative density	Not determined.
· Vapour density	Not determined.
· 9.2 Other information	
· Appearance:	
· Form:	Fluid
	(Contd. on page 5)

(Contd. on page 5)

GB

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

**Product name Stain Mahogany** 

	(Contd. of page 4
Important information on protection of heal environment, and on safety.	th and
· Self-inflammability:	Product is not selfigniting.
Explosive properties:	Product is not explosive. However, formation of explosive air/steam mixtures is possible.
· Change in condition	· ·
· Evaporation rate	Not determined.
· Information with regard to physical hazard	classes
• Explosives	Void
· Flammable gases	Void
Aerosols	Void
Oxidising gases	Void
· Gases under pressure	Void
· Flammable liquids	Highly flammable liquid and vapour.
Flammable solids	Void
Self-reactive substances and mixtures	Void
Pyrophoric liquids	Void
Pyrophoric solids	Void
Self-heating substances and mixtures	Void
Substances and mixtures, which emit flamm	able
gases in contact with water	Void
Oxidising liquids	Void
• Oxidising solids	Void
Organic peroxides	Void
· Corrosive to metals	Void
· Desensitised explosives	Void

## SECTION 10: Stability and reactivity

· 10.1 Reactivity No further relevant information available.

10.2 Chemical stability

- Thermal decomposition / conditions to be avoided: No decomposition if used according to specifications.
- 10.3 Possibility of hazardous reactions No dangerous reactions known
- 10.4 Conditions to avoid No further relevant information available.
- 10.5 Incompatible materials: No further relevant information available.
- · 10.6 Hazardous decomposition products: No dangerous decomposition products known

## **SECTION 11: Toxicological information**

· 11.1 Information on hazard classes as defined in Regulation (EC) No 1272/2008

• Acute toxicity Based on available data, the classification criteria are not met.

· LD/LC50	values th	at are relevan	t for cl	assification:
-----------	-----------	----------------	----------	---------------

( 1 1	, ,	
64-17-5 et	hanol	
Oral	LD50	7,060 mg/kg (rat)
Inhalative	LC50/4 h	20,000 mg/l (rat)
34590-94-	8 Dipropyl	lene glycol monomethyl ether
Oral	LD50	5,135 mg/kg (rat)
Dermal	LD50	9,500 mg/kg (rat)
78-93-3 bi	itanone	·
Oral	LD50	3,300 mg/kg (rat)
Dermal	LD50	5,000 mg/kg (rabbit)
Inhalative	LC50/4 h	12,000 mg/l (rat)
		(Contd. on page 6

GB

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

(Contd. of page 5)

Product name Stain Mahogany

- Skin corrosion/irritation Based on available data, the classification criteria are not met.
- Serious eye damage/irritation Based on available data, the classification criteria are not met.
- Respiratory or skin sensitisation Based on available data, the classification criteria are not met.
- Germ cell mutagenicity Based on available data, the classification criteria are not met.
- Carcinogenicity Based on available data, the classification criteria are not met.
- *Reproductive toxicity* Based on available data, the classification criteria are not met.
- STOT-single exposure Based on available data, the classification criteria are not met.
- STOT-repeated exposure Based on available data, the classification criteria are not met. • Aspiration hazard Based on available data, the classification criteria are not met.
- 11.2 Information on other hazards
- · Endocrine disrupting properties

78-93-3 butanone

List II

### **SECTION 12: Ecological information**

- · 12.1 Toxicity
- · Aquatic toxicity: No further relevant information available.
- · 12.2 Persistence and degradability No further relevant information available.
- · 12.3 Bioaccumulative potential No further relevant information available.
- · 12.4 Mobility in soil No further relevant information available.
- · 12.5 Results of PBT and vPvB assessment
- **PBT:** Not applicable.
- **vPvB:** Not applicable.
- 12.6 Endocrine disrupting properties For information on endocrine disrupting properties see section 11.
- · 12.7 Other adverse effects
- Additional ecological information:
- · General notes:
- Water hazard class 1 (Self-assessment): slightly hazardous for water.

Do not allow undiluted product or large quantities of it to reach ground water, water bodies or sewage system.

### **SECTION 13: Disposal considerations**

- · 13.1 Waste treatment methods
- · Recommendation

Must not be disposed of together with household garbage. Do not allow product to reach sewage system. After prior treatment product has to be landfilled or incinerated under adherence to the regulations pertaining to the disposal of especially hazardous waste.

· Uncleaned packagings:

• *Recommendation: Disposal must be made according to official regulations.* 

· 14.1 UN number or ID number	
· ADR, IMDG, IATA	UN1263
$\cdot$ 14.2 UN proper shipping name	
$\cdot ADR$	1263 PAINT (vapour pressure at 50°C not more tha
	110 kPa)
· IMDG, IATA	PAINT

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Product name Stain Mahogany

	(Contd. of page
14.3 Transport hazard class(es)	
ADR, IMDG, IATA	
Class	3 Flammable liquids.
Label	3
14.4 Packing group ADR, IMDG, IATA	II
14.5 Environmental hazards: Marine pollutant:	No
14.6 Special precautions for user	Warning: Flammable liquids.
Kemler Number:	33
EMS Number:	<i>F-E,<u>S-E</u></i>
Stowage Category	В
14.7 Maritime transport in bulk according instruments	to IMO Not applicable.
Transport/Additional information:	
ADR	
Limited quantities (LQ)	5L
Excepted quantities $(\widetilde{E}Q)$	Code: E2
	Maximum net quantity per inner packaging: 30 ml
_	Maximum net quantity per outer packaging: 500 ml
Transport category	2
Tunnel restriction code	D/E
IMDG	
Limited quantities (LQ)	5L
Excepted quantities (EQ)	Code: E2
	Maximum net quantity per inner packaging: 30 ml Maximum net quantity per outer packaging: 500 ml
UN "Model Regulation":	UN 1263 PAINT (VAPOUR PRESSURE AT 50°C NO
	MORE THAN 110 KPA), 3, II

# **SECTION 15: Regulatory information**

- 15.1 Safety, health and environmental regulations/legislation specific for the substance or mixture • Poisons Act
- · Regulated explosives precursors

None of the ingredients is listed.

- · Regulated poisons
- None of the ingredients is listed.

· Reportable explosives precursors

None of the ingredients is listed.

## · Reportable poisons

None of the ingredients is listed.

· Directive 2012/18/EU

· Named dangerous substances - ANNEX I None of the ingredients is listed.

(Contd. on page 8)

GB

Printing date 22.01.2024

*Version number 4 (replaces version 3)* 

Revision: 15.01.2024

Product name Stain Mahogany

- Seveso category P5c FLAMMABLE LIQUIDS
- Qualifying quantity (tonnes) for the application of lower-tier requirements 5,000 t
- Qualifying quantity (tonnes) for the application of upper-tier requirements 50,000 t

· National regulations

- Water hazard class: Water hazard class 1 (Self-assessment): slightly hazardous for water.
- 15.2 Chemical safety assessment: A Chemical Safety Assessment has not been carried out.

## **SECTION 16: Other information**

These data are based on our present knowledge. However, they shall not constitute a guarantee for any specific product features and shall not establish a legally valid contractual relationship.

Alteration in the context will be marked with a cross (\*).

This Safety Data Sheets is in compliance with Regulation (EC) No 1907/2006, Article 31 as amended by Regulation (EU) 2020/878.

#### · Relevant phrases

H225 Highly flammable liquid and vapour.

H319 Causes serious eye irritation.

H336 May cause drowsiness or dizziness.

EUH066 Repeated exposure may cause skin dryness or cracking.

Classification according to Regulation (EC) No 1272/2008

The classification of the mixture is generally based on the calculation method using substance data according to Regulation (EC) No 1272/2008.

• Department issuing data specification sheet: Product safety

· Abbreviations and acronyms:

RID: Règlement international concernant le transport des marchandises dangereuses par chemin de fer (Regulations Concerning the International Transport of Dangerous Goods by Rail) IATA-DGR: Dangerous Goods Regulations by the "International Air Transport Association" (IATA) ICAO: International Civil Aviation Organisation ICAO-TI: Technical Instructions by the "International Civil Aviation Organisation" (ICAO) ADR: Accord relatif au transport international des marchandises dangereuses par route (European Agreement Concerning the International Carriage of Dangerous Goods by Road) IMDG: International Maritime Code for Dangerous Goods IATA: International Air Transport Association GHS: Globally Harmonised System of Classification and Labelling of Chemicals EINECS: European Inventory of Existing Commercial Chemical Substances ELINCS: European List of Notified Chemical Substances CAS: Chemical Abstracts Service (division of the American Chemical Society) LC50: Lethal concentration, 50 percent LD50: Lethal dose, 50 percent PBT: Persistent, Bioaccumulative and Toxic vPvB: very Persistent and very Bioaccumulative Flam. Liq. 2: Flammable liquids – Category 2 Eye Irrit. 2: Serious eye damage/eye irritation - Category 2 STOT SE 3: Specific target organ toxicity (single exposure) – Category 3 • \* Data compared to the previous version altered.

(Contd. of page 7)