

Technical Tips and Tricks

Pad-Application for LOBASOL HS 2K ImpactOilColor



1:
LOBASAND Spezial Pad beige




2:
Put LOBASOL® HS 2K ImpactOil Color directly on a LOBASAND Spezial Pad beige



3:
LOBASAND Spezial Pad beige, soaked with LOBASOL® HS 2K ImpactOil Color



4:
Apply oil with the pad in an evenly thin layer by using a single-disc machine

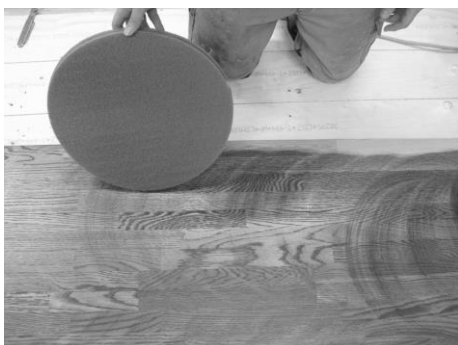

5:
Use a new LOBASAND Spezial Pad beige



6:
Equalize the surface. Residues in beveled edges have to be equalized by hand in some cases.

After drying overnight repeat the procedure

LOBA GmbH & Co. KG, Leonberger Straße 56-62, D-71254 Ditzingen, Fon +49 (0) 7156/357-0,
Fax +49 (0) 7156/357-211, Internet: www.loba.de