



Contents

HARDWOOD FLOORS

Joint Fillers	13
Primers & Stain	15-17
List of Wood Species for Primers & Finish Systems	18
Application Tools for Primers & Finish Systems	19
1K Finishes	21
2K Finishes	22-23
Additives	24-25
UV Finish	26
Special Products	27
High Solid Oils, Waxes & Stain	29-32
Hard Wax Oils	33-35
List of Wood Species for Oil & Wax Systems	36
Application Tools for Oil & Wax Systems	37

SPORTS FLOORING

Finishes	39
Cleaning & Care	40

RESILIENT FLOORING

Finish	43

TROWELLED FLOORING

Primer / Finish	45
-----------------	----

Use our download area:

- Set-up recommendations
- Technical information
- · Application videos
- \rightarrow www.loba.de/int_en/downloads



OUTDOORS

Preparation & Finishes	47
Oils	48
Cleaning & Care	49

CLEANING & CARE

Maintenance Cleaning	51
Finished Floors	52-53
Oiled/Waxed Floors	54-55

HOME

Cleaning & Care for the Home 57-59

ABRASIVES & PADS

Sanding Recommendations	61
Ceramic	62
Zircon	63
Aluminum Oxide	64
Other Abrasives & Pads	65

TOOLS & ACCESSORIES

Application Tools	67-68
Range of Use – Rollers	69
Accessories	70-71
Joint Sealer & Repair	72





LOBA On Top!

LOBA loves beautiful floors. As a family-run company with a tradition spanning a century, we offer you modern products for the creation, finishing and maintenance of surfaces made of wood and cork, as well as resilient and mineral floorings. LOBA attaches the highest value to user-friendly, safe and sustainable products. Out of responsibility towards people and nature, we have long focused on the development of environmentally compatible, solvent-free systems - for a living environment that makes us all feel good.

ORANGE ZONE

The inaugural issue of the LOBA customer magazine, ORANGE ZONE, will be published in April. Informative and practical, this German-English bilingual magazine provides added value in the areas of news, technology, and service." 2023

2022

You can find all of LOBA's milestones since 1922 here.

100 YEARS LOBA

"Creating the future together" - LOBA celebrates 100 years of technical excellence and innovation, passion, and outstanding service.

LOBA On Top! Produced in Germany - made for the world.

NEW GROUND

Cool, individual, timeless - minimal industrial style through an exposed concrete look: Market launch of the Factory Line, LOBA's first water-based finish system for leveling compounds.



NVESTMENT IN THE FUTURE

INVISIBLE SURFACE PROTECTION

water-based surface protection 2K InvisibleProtect. Thanks to its innovative technology, it achieves a look and feel that appears even more natural than raw wood.





PARTNERSHIP WITH WAKOL

On April 13, 1922, Wilhelm Hornung and

Dr. Max Fischer found Vereinigte

FOUNDING

INNOVATION

With the introduction of the legendary WS 2K 95, the world's first water-based 2K hardwood floor finish system, LOBA sets a new standard in the industry.



The product range includes floor stains, floor cleaners, floor polish, ski wax, shoe polish, leather grease, and household candles. Already in September 1922, 20 candle machines produce 85 tons of household candles.

1922

1995

2006





Excellent! Sustainability at LOBA

When it comes to sustainability, LOBA solutions are the perfect companion for every step of the process – not just for new-builds, but also and especially in refurbishment projects. At the company level as well, we've set ourselves some lofty goals.

REFURBISH INSTEAD OF USING NEW

Convince your customers to give hardwood flooring a second chance! Old flooring, when restored to a high standard, is often a beautiful alternative to new flooring. It also tells a story, and not infrequently turns out to be the more economical solution. By far, however, it's the more sustainable option: Renovating a hardwood floor conserves resources and is environmentally friendly. It also avoids waste and produces less CO₂ than a complete replacement.

PRODUCTS INSPIRED BY SUSTAINABILITY

As part of our traditional role as a pioneer in the development of water-based 2K finishes, sustainable formulas can be found throughout the range of LOBA finishing products – out of responsibility towards our customers, end users and employees. Numerous labels, such as the coveted GEV-EMICODE®, the French "Emissions dans l'air intérieur" seal, or the Scandinavian "M1" mark, bear testimony to our commitment that extends far beyond national borders.

SUSTAINABLE AND FAIR: OUR DELIVERY PROCESSES

To make sure our suppliers meet our rigorous standards, they agree to our code of conduct, which requires them to understand, follow, and champion our values and principles in environmental protection, social responsibility, and governance. As part of this commitment, we have also dedicated ourselves the United Nations' Sustainable Development Goals.

ISO-CERTIFIED OUALITY AND ENVIRONMENTAL MANAGEMENT

LOBA has been DEKRA-certified since 2011 as compliant with ISO 9001 and ISO 14001. These certificates stand for high standards in quality and environmental management and confirm the ongoing improvement of our performance in terms of process, product and service quality as well as environmental protection. As a result, we operate a solid business with long-term personnel planning – and 100% of our electricity comes from green energy sources.















A STRONG CONNECTION FOR YOUR SUCCESS

Connected Systems

Perfect results for your projects

Your benefits with LOBA Wakol Connected Systems

- · Perfectly coordinated products
- Maximum safety during application
- Successful handling in a tried-and-tested, guaranteed system
- Exclusion of interactions between oils / finishes and adhesives
- · Avoidance of dark run-ins at short end joints
- · Avoidance of dark joints, since there is no softening of the finish layer
- Long-term quality assurance through regular tests in the event of formula adjustments

We care about your success!



			WAKOL	
		LE\	/ELLING COMPOU	IND
1		Z 610	Z 615	Z 625
LOBA	FINISH SYSTEM FactoryBase and 2K FactoryStyle	1	1	1
07	OIL / WAX SYSTEM 2K ImpactOil and Akzent 100 Wax	1	1	1





New look, same quality!



MORE INFORMATION, MORE ORIENTATION

Get your goal even faster – with the new LOBA labels.











The key facts at a glance

The new, user-friendly LOBA label design now makes it even easier for you to find the right product.

- Clear presentation of product features
- · Background images show the range of use
- Color coding system for better differentiation of product types



THE RANGE OF USE



Indoor | Wood | Preparation



Indoor | Wood | Finish systems



Indoor | Wood | Sport



Indoor | Wood | Oil and wax systems



Indoor | Trowelled floor



Indoor | Resilient




Indoor | Resilient | Sport



Outdoor

THE NEW COLOR CODING SYSTEM

Preparation Priming Finishing Oiling & Waxing Cleaning & Care

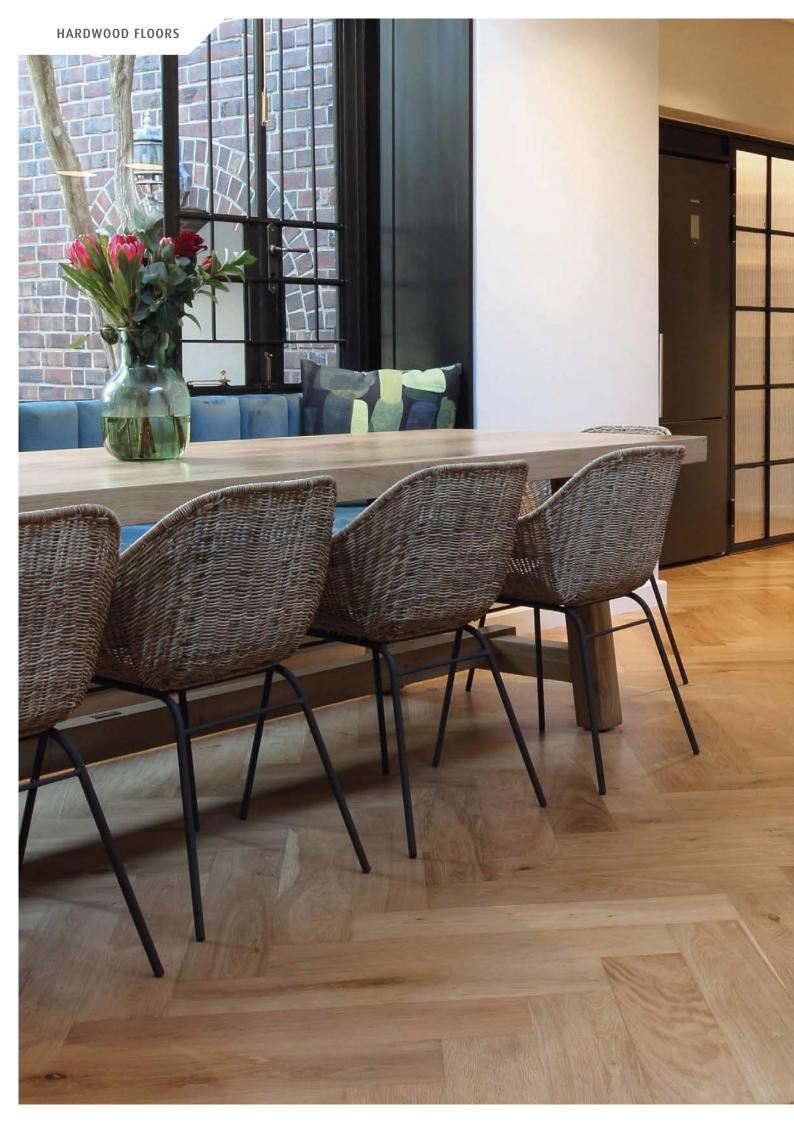







EasyFill Water-based binder.

- · Easy to work with
- · Closes even wider joints by one-time application
- No subsiding of the filler in the joint
- Very fast drying
- Excellent sandability; clearly visible and low adhesion on sanding paper
- Excellent color scheme for oiled and finished surfaces
- Applicable to all common European and exotic wood types
- Odor neutral

ARTNO.		6	6-0-0	GISCODE
11039-000000	11/51	12/4	480/128	W2+

APPLICATION DEVICE Trowel	ml/m ²
Wood	
EC2	



ART.-NO.

11511-000000

VivaFill

Water-based binder.

- Extremely economical to use
- Odor neutral
- Rapid drying
- Easy and safe application
- · Low VOC content
- Very low emission, certified to EMICODE® EC1

APPLICATION DEVICE Trowel	ml/m²
Wood	
E	



Fugenkittlösung Solvent-based binder.

- Rapid drying
- Excellent sanding properties
- · Exceptional color fidelity even with exotic wood species


128

GISCODE

W2+

· Prevents finish shrinkage

ARTNO.		6	600	GISCODE
11085-100000	51/121	4/-	120/42	G2







EasyPrime

Polyurethane-acrylate water-based primer for roller and trowel application for hardwood floors.

- Used on millions of m² worldwide every year
- All-rounder offering maximum processing reliability
- Premium quality at a fair price
- · Reduces side bonding
- Suitable for use with practically all European and exotic woods, as well as in sports and multipurpose halls

APPLICATION DEVICE	ml/m²
Universal 100 roller	100 - 120
Microfibre 100 - 120 roller	100 - 120
Trowel (2 in a cross-wise pattern)	40 - 60
Wood	
ECI)	SCOT-190 W. Laughter
EMISSIONS DANS L'AIR INTÉRIEUR A+	

ARTNO.		6	600	GISCODE
11036-900000	11/51/101	12/4/-	480/128/60	W3+



VivaPrime

Acrylate water-based primer for roller and trowel application.

- · Reduces side bonding
- Suitable for renovation and new installation
- Good price/performance ratio
- Easy and safe application

APPLICATION DEVICE	ml/m²
Universal 100 roller	100 120
Microfibre 100 - 120 roller	100 - 120
Trowel (2 in a cross-wise pattern)	40 - 60
Wood	
Lead and the lead	
EMESIONS DAMS LARI INTERIEUR A + A B C	

ARTNO.		6	500	GISCODE
11518-000000	51/101	4/-	128/60	W2+




PrimaSeal Plus

Alcohol-based primer for hardwood floors.

- Easy and safe application
- ${\boldsymbol{\cdot}}$ Excellent blocking of wood ingredients and old contamination
- · Intensifies the color of the wood
- Good price/performance ratio

ARTNO.		6	6-6-6	GISCODE
11033-600000	51	4	128	G1





VARIANT

transparent

ART.-NO.

11053-000000

2K Intensive

High-Solid 2-component oil-based primer for hardwood floors

- · Significant deepening of the wood color
- Cobalt and butanonoxime-free
- Combines oiled look with the advantages of finished surfaces
- · Easy and safe application
- · No roughening of the wood
- · No side-bonding effect

600 g/2.5 kg

APPLICATION DEVICE Microfibre 60 - 80 oil roller	g/m ² 20 - 40
Wood	
CHISDRI DAIS (MR PYTEU) MA THE STATE OF THE	



2K Intensive Color


Colored 2-component High-Solid oil-based primer for hardwood floors.

320/120

GISCODE

Ö40/DD+

- · All variants can be mixed with each other
- Cobalt and butanonoxime-free
- Easy and safe application
- · Versatile design options
- · No roughening of the wood
- $\bullet \ \ \text{No side-bonding effect}\\$









ProColor

Stain for hardwood floor based on solvents.

- Versatile design options
- Easy and safe application
- · All variants can be mixed with each other
- Variety of possible combinations

APPLICATION DEVICE	ml/m²
Trowel	
Microfibre 60 - 80 oil roller as a wiper	30 - 50
Wood	
July States Vo. 55. Indicates proposed to the parameter contracting proposed to the parameter of the parameter of the parameter of the 2 MLT 106-522	

ARTNO.	VARIANT			600	GISCODE
11012	various colors	750 ml	12	432	G1





List of Wood Species for Primers & Finish Systems

1. European wood species

Wood type	2K Intensive		Prime		Prime	PrimaSeal	2K Invisible	Life*
		Rolled	Troweled	Rolled	Troweled	Plus	Protect*	
Maple	+	+	+	+	+	+	+	+
Acacia / Robinia	+	♦	-	◊	-	+	♦	♦
Acacia / steam-treated Robinia	+	♦	-	♦	-	+	♦	♦
Birch	+	+	+	+	+	+	+	+
Pear tree	♦	-	-	-	-	-	-	-
Steam-treated beech	+	+	-	♦	-	+	♦	♦
Beech	+	+	+	+	+	+	+	+
0ak	+	+	+	+	+	+	+	+
Alder	+	+	♦	+	♦	+	+	+
Ash	+	+	+	+	+	+	+	+
Spruce	+	+	+	+	+	+	+	+
Chestnut	+	+	♦	+	♦	+	+	+
Pine	+	+	-	+	-	+	+	+
Cherry	+	+	-	♦	-	+	♦	♦
Larch	+	♦	-	♦	-	+	♦	♦
Walnut	+	+	_	♦	-	+	♦	♦
Olive	+	+	_	\$	_	+	..	♦
Smoked oak	+	♦	_	\$	_	♦	♦	♦
Red oak	+	+	+	+	+	+	+	+
eu oak Elm	+	+	→	+ ♦	+	+	*	÷
	+	т		V		т		· ·
. Exotic wood species								
Afrormosia	+	+	_	♦	-	+	♦	♦
Arrurra Vermelho	+	_	-	_	-	+	-	-
Bamboo	-	+	_	+	_	+	+	+
Steam-treated bamboo	-	+		, \$			·	
Bilinga	+	+	_	♦	_	+	\$	\$
Basra locus	+	+	_	♦	_	+	\$	♦
Cabreuva	+	+	-	♦	-	+	♦	♦
Steam-treated coigue	+	+	-	♦	-	+	♦	♦
Cumaru/almendrillo	+	+	-	♦	-	+	♦	♦
Сигираи	+	+	-	♦	-	+	♦	♦
Doussie / afzelia	+	♦	-	♦	-	+	♦	♦
Ebony/macassar	-	+	-	♦	-	+	♦	♦
Eucalyptus / spotted gum	+	+	-	♦	-	+	♦	♦
Eucalyptus / jarrah	+	+	-	♦	-	+	♦	♦
Guatambu	+	+	-	♦	-	+	♦	♦
Hevea	+	+	_	+	_	+	+	+
Incienso Colorado	+	+	-	♦	-	+	♦	♦
Ipe/lapacho	♦	♦	-	♦	-	♦	♦	♦
Iroko / kambala	-	-	_	_	_	♦	-	-
Iron wood	+	+	_	♦	-	+	♦	♦
Jatoba/Brazilian cherry	+	♦	_	\$	_	+	..	\$
Kempas	_	\$	_	\$	_	+	♦	\$
Coconut	+	+	_	\$	_	+	\$	*
	T .		_		_		\$	
Kotibe	+	+	_	♦	_	+		♦
Mahogany	+	+	-	♦	-	+	♦	♦
Massaranduba	+	+	-	♦	-	+	♦	♦
Mecrusse	+	♦	-	♦	-	+	♦	♦
Merbau	+	♦	-	♦	-	+	♦	♦
Muhuhu	+	-	-	-	-	+	-	-
Mutenye	+	+	-	♦	-	+	♦	♦
Padouk	+	+	-	♦	-	+	♦	♦
Panga Panga	+	+	-	♦	-	+	♦	♦
Palisander	-	+	-	♦	-	+	♦	♦
Piguia Marfin	+	-	-	_	-	+	-	-
Pitch pine (old floors)	+	+	-	+	-	+	+	+
Hard pine (pitch pine new)	+	+	_	♦	_	+	♦	♦
Purpleheart	+	-	_	-	_	+	-	-
iucupira	+	+	-	♦	-	+	♦	♦
Fasmanian oak	+	+	+	+	+	+	+	+
asmanian oak auari	+		-	+	-		+	
		+				+		+
eak	+	+	-	♦	-	+	♦	♦
igerwood	+	+	-	♦	-	+	♦	♦
Wenge	+	+	-	♦	-	+	♦	♦
/vyraro	+	+	-	♦	-	+	♦	♦
Cypress	+	+	-	♦	-	+	♦	♦
Other substanta								
. Other substrates								
Multiplex	♦	-	+	♦	+	♦	♦	♦
OSB plates	♦	-	+	♦	+	♦	♦	♦
/100 chipboards								

^{+ =} Can be used without restrictions

^{♦ =} Use may lead to problems. We recommend consulting LOBA

^{- =} Use not recommended

 $^{^{\}ast}$ Can be used in set-up without primer

Application Tools for Primers & Finish Systems



	OIL ROLLER		FINISH ROLLER		
	Micro 60-80	Micro 100-120	Universal 100	Deluxe 120	
	ARTNO. 16236-1	ARTNO. 16236	ARTNO. 16233	ARTNO. 16234	
EasyPrime	-	✓	✓	-	
VivaPrime	-	✓	✓	-	
PrimaSeal Plus	-	-	✓	-	
2K Intensive	✓	-	-	-	
ProColor	√*	-	-	-	
FactoryBase	-	✓	✓	_	
			'		
EasyFinish	-	✓	-	✓	
Viva	-	✓	-	✓	
Life	-	✓	-	✓	
2K InvisibleProtect	-	-	-	✓	
2K Supra A.T.	-	✓	-	✓	
2K Duo	-	✓	-	✓	
2K Fusion	-	✓	-	✓	
Rush	-	_	✓	-	

- ✓ = Can be used without restrictions = Use not recommended * = Observe technical information

Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/int_en/downloads

Consumption calculator

Your handy helper for quickly calculating how much you need can be found at www.loba.de/int_en/services and on every product page.







EasyFinish

Water-based 1-component finish for hardwood floors.

- Easy 1K system combined with 2K performance
- Outstanding application qualities easy to use and safe, no lap marks
- Very low emission, certified to EMICODE® EC1
- · Suitable for almost all wood species as well as cork
- EasyFinish semi-gloss combined with LOBA SportCare meets the requirements for friction according to DIN 18032 for sports floors
- Long-lasting beauty of the floor high resistance to mechanical wear and household chemicals

APPLICATIO	N DEVICE	ml/m²
Deluxe 120 Microfibre 1	roller 00 - 120 roller	100 - 120
Stress level	4 5 6 7 Commercial	8 9 10 Extreme
Wood Cork	:	
Laba contact to Co. 455 finishersepport for Emperoduler cond-time September 200	EC 1 CONNECTED SYSTEMS	ES 201:195 us tayfresh
ÉMISSIONS DANS L'AIR INTI	DIN 1803	1)
1) semi-gloss		

ARTNO.	VARIANT		\subseteq	600	GISCODE
11517-000003	satin	11/51	12/4	480/128	
11517-000001	semi-gloss	11/51/101	12/4/-	480/128/60	W3+
11517-000002	gloss	51	4	128	



Viva

Water-based 1-component finish for hardwood floors.

- Excellent chemical and abrasion resistance
- Very good resistance to black heel marks
- · Powerful resistance to plasticisers from hardwood floor adhesives
- Easy and safe application, no lap marks
- Full "Connected Systems" approval
- · Low VOC content
- Very low emission, certified to EMICODE® EC1

Deluxe 120 roller Microfibre 100 - 120 roller	
Microfibre 100 - 120 roller	00
	20
Stress level	
1 2 3 4 5 6 7 8 9	10
Residential Commercial Extra	
Wood	
ECI) CONTINUE CONTINUE	

ARTNO.	VARIANT		6	6-0-0	GISCODE
11519-100003	satin	51/101	4/-	128/60	W2+
11519-100001	semi-gloss	11/51/101	12/4/-	480/128/60	VV Z+




Life

Water-based 1-component finish for hardwood floors.

- · Good price/performance ratio
- · Balanced properties
- · High filling capacity
- Easy and safe application

ARTNO.	VARIANT				GISCODE
11524-900003	satin	51/101	4/-	128/60	
11524-900001	semi-gloss	51/101	4/-	128/60	W2+
11524-900002	gloss	51	4	128	






2K InvisibleProtect

New-generation, water-based surface protection for parquet and hardwood floors.

- · Natural structure and feel like untreated hardwood flooring
- · 2-coat system without primer
- Very low emission, certified to EMICODE® EC1 Plus
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- No polishing effect
- Excellent chemical resistance
- As easy to clean as finished surfaces
- No grain accentuation, the original color of the wood remains as it was in its original state

ARTNO.		6	600	GISCODE
11474-000005	1kg/5kg	6/2	360/96	W2/DD+







VARIANT

semi-gloss

satin

ART.-NO.

11465-000003

11465-000001

2K Supra A.T.

Ceramic-reinforced water-based 2-component polyurethane finish for hardwood floors.

• Fully usable after 12 hours				Microfibre 100 - 120 roller		
 Sets new stand Meets highest Extremely high Qualified for value 	demands scratch resistar	nce thanks to ceram	nic components	Stress level 1 2 3 4 5 6 7 8 9 10 Residential Commercial Extreme Wood Cork		
<u>r</u>	б		GISCODE	1) MISSIONS DANS LARR INTÉRIEUR A + DIN 18032		
5 kg	2	96		FIBR At A B C		
5 kg	2	96	W3/DD+	1) satin		




2K Duo

Water-based 2-component polyurethane finish for hardwood floors.

- Easy and safe application
- Very low emission, certified to EMICODE® EC1 Plus
- Qualified for various floorings
- · Excellent wear resistance
- · Excellent chemical resistance
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

ARTNO.	VARIANT			لتحتا	GISCODE
11466-900004	extra matte	5 kg	2	96	W3/DD+
11466-900003	satin	1kg/5kg	6/2	360/96	W2/DD+
11466-900001	semi-gloss	1kg/5kg	6/2	360/96	W2/UU+
11466-900002	gloss	5 kg	2	96	W3/DD+



APPLICATION DEVICE

Deluxe 120 roller




2K Fusion

Water-based 2-component polyurethane finish for hardwood floors.

- Easy and safe application
- Excellent wear resistance
- Good price/performance ratio
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

ARTNO.	VARIANT		\Box	LDD	GISCODE
11471-000003	satin	5 kg	2	96	wa/pp.
11471-000001	semi-gloss	5 kg	2	96	W3/DD+






SlipResistAdditive to improve the anti-slip properties.

- Certified slip resistance
- Additive has no negative effects on the soiling behavior
- Water-based technology, solvent-free
- Simple and safe application
- Simplified storage





ARTNO.		6
11018-000000	100 g	15

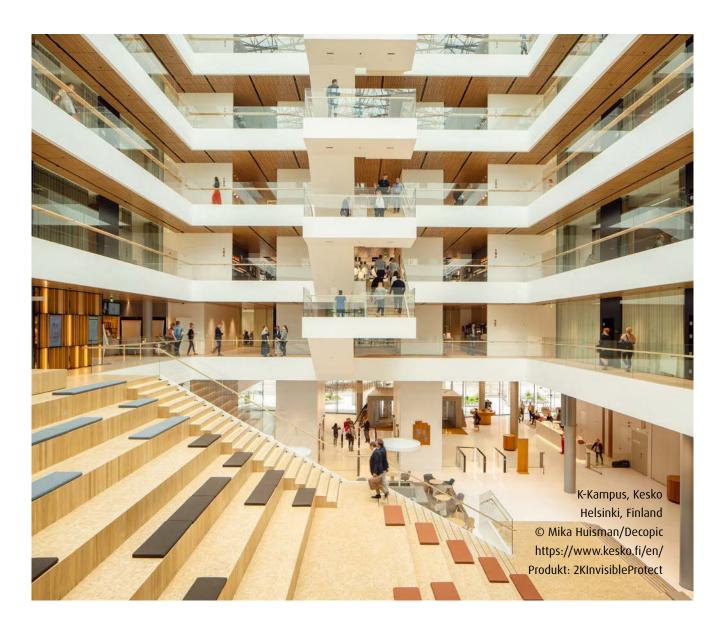



Whitener

Additive for brightening wood surfaces.

- · Creates a smooth brightening of the wood surface
- Intensifies the whitening effect of white colored surfaces
- Variable control of brightening intensity
- May be combined with all water-based primers and finishes from LOBA
- Reduces the natural yellowing of the wood
- · Provides individual design options
- · Water-based technology, solvent-free
- Simple and safe application

ARTNO.		6	GISCODE
11540-900126	80 ml	15	W1



Amberizer

Additive to achieve a color intensification of wood surfaces

- May be combined with all water-based primers and finishes from LOBA
- Adjustment of newly finished surfaces to solvent-containing finished existing surfaces
- · Water-based technology, solvent-free
- · Simple and safe application

ARTNO.	Ö	6	GISCODE
11540-800217	100 ml	15	W1



UV-Protect

Prevents the UV-light induced yellowing of light colored wood species.

- Original appearance of the wood is preserved long-term
- · Can be used for all water-based LOBA finishes
- Innovation by LOBA

ARTNO.		б
11017-000000	100 ml	15



Argo

Additive to prolong the drying time.

- Reduces the risk of lap marks
- · Finish film properties are unchanged


ARTNO.	Ö	\Box
11015-000000	250 ml	12



Rush

UV-curing 1-component water-based polyurethane finish for hardwood floors.

- Sets new standards in quality
- Meets highest demands
- Long durability
- · Robust surface
- · No waiting time until use



	_		
11611-000003 satin	101	60	W2+





2K Contact

Water-based 2-component adhesive primer.

- $\bullet \ \ \text{Recommended by leading industrial wood floor manufacturers}$
- Extremely economical to use
- Enables dust-free renovation
- Original appearance remains preserved during restoration
- Time and cost saving

APPLICATION DEVICE	g/m²
TrimPad Applicator	10
Trowel	10
Wood	


ARTNO.		6	666	GISCODE
11520-000000	750 g	4	384	W3/DD+




TopGel

Water-based polyurethane-acrylate trowel finish.

- Prepares the surface for the last coat
- · Visually fuller surface
- Extremely economical to use



ARTNO.		6		GISCODE
11455-000000	4 kg	4	84	W3+

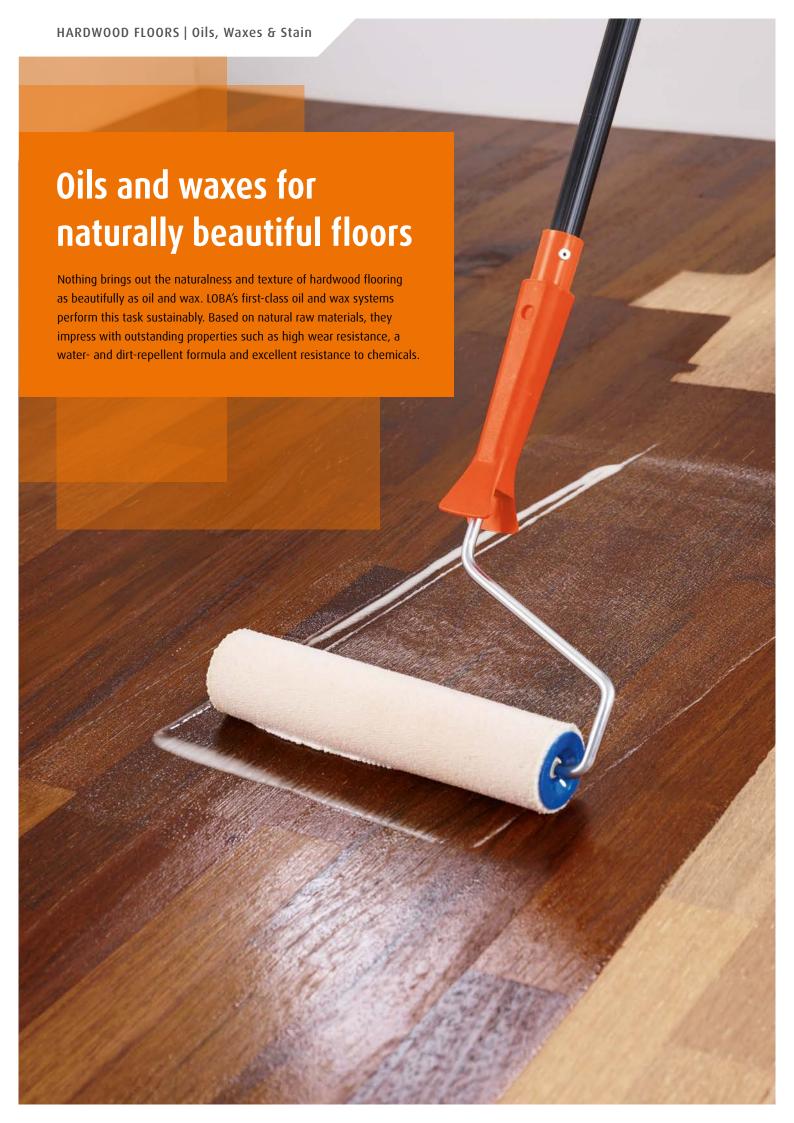




2K ImpactOil

2-component High Solid oil based on natural ingredients.

- $\bullet \ \, \text{Excellent water resistance for hardwood flooring in wet zones such as bathrooms or spa} \ \text{areas}$
- Time-saving processing in a 1-day system
- Extremely economical to use
- 100% solid solvent-free
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Easy and safe application
- One roller application is sufficient
- Can be used after only 24 hours
- Suitable for children's toys as per EN 71-3

ARTNO.	VARIANT		6	6	GISCODE
10610-000000	transparent	750 g/2.5 kg	4	400/120	Ö10/DD+







PreTone


Water-based pigment stain for hardwood floors.

- $\bullet \ \ \text{For significantly bolder colors}$
- · Reduced oil-specific yellowing
- Easy and safe application
- Solvent-free
- Virtually limitless color combinations are possible
- · Odor neutral

APPLICATION DEVICE	ml/m²
Microfibre 100 - 120 roller as a wiper	100 - 120
Spray can and applicator	
Wood	

ARTNO.	VARIANT		\Box	600	GISCODE
10612	various colors	2.51	6	144	W1



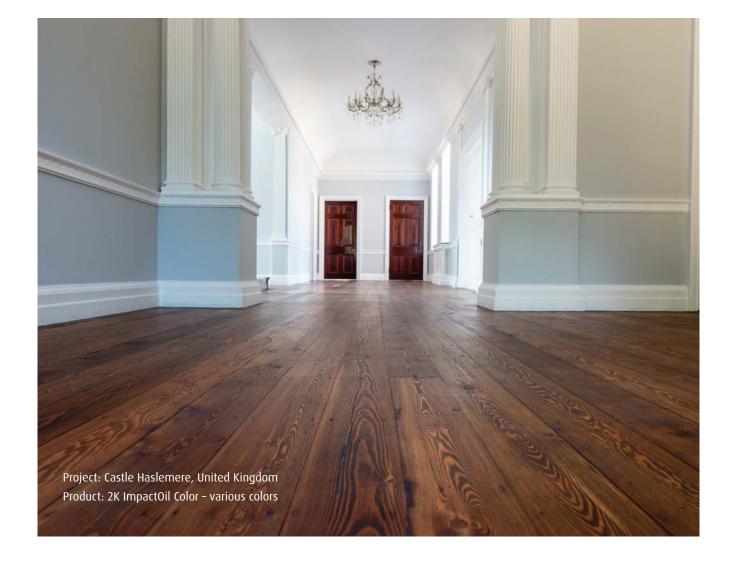



2K ImpactOil ColorColored High Solid oil based on natural ingredients.

- · Excellent water resistance for hardwood flooring in wet zones such as bathrooms or spa areas
- Time-saving processing in a 1-day system
- · Extremely economical to use
- · 100% solid solvent-free
- · All variants can be mixed with each other
- · Easy and safe application
- · Certified anti-slip properties as per DIN EN 16165:2021-12 for work
- · Suitable for children's toys as per EN 71-3

APPLICATION DEVICE Trowel	g/m² 30 - 60
Wood	
included in a second constant of the constant	CONNECTED
R10 R10 EMISSIONS BAHS LAIR INTÉRIEUR 10-19° A + A B C	



Coloration with 2K ImpactOil Color

Preparation up to fine sanding

Color samples are not binding

Standard recommendation for the coloring impregnation of hardwood floors.

5 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige 4) Apply a second layer of **2K ImpactOil Color** with LOBATOOL Trowel, allow to penetrate 3 After the penetration time, level out with a single-disc machine and LOBASAND SpecialPad beige 2) First application of **2K ImpactOil Color** with LOBATOOL Trowel, allow to penetrate

Please note the detailed technical information, processing instructions and set-up recommendations as well as technical tips and tricks "Sanding Instruction Staining of Wooden Floors"

Discover the infinite color variety of 2K ImpactOil Color, also in

products, the beauty of your floors






Akzent 100 Oil

High Solid oil for wood floors on natural base.

- · Made of plant-based oils
- 100% solid solvent-free
- · Extremely economical to use
- High resistance to water
- Easy and safe application
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3

ARTNO.		6	6 6 6	GISCODE
10601-000000	750 ml/3 l	6	480/180	Ö10+






Akzent 100 Wax

High Solid oil/wax based on natural ingredients.

- Smooth and full bodied appearance
- 100% solid solvent-free
- Extremely economical to use
- Increases the surface's water resistance
- Suitable for children's toys as per EN 71-3








HardwaxOil Nature

Layer-forming hard wax oil.

- · Oxime and cobalt free
- Natural look of an untreated floor
- Smooth and full bodied appearance
- · Natural, velvety feel
- · Suitable for partial repairs
- $\boldsymbol{\cdot}$ Dirt resistant, easy to clean surface
- Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children's toys as per EN 71-3

ARTNO.		6	5-0-0	GISCODE
10509-000009	2.5 l/750 ml	4/6	120/480	Ö60







Hardwax0il

Layer-forming hard wax oil.

- · Oxime and cobalt free
- Smooth and full bodied appearance
- · Natural, velvety feel
- Suitable for partial repairs
- Dirt resistant, easy to clean surface
- · Anti-slip class R10 according to DIN EN 16165:2021-12
- Suitable for children's toys as per EN 71-3

	APPLICATION DEVICE	ml/m²
	Trowel	20
	Microfibre 60 - 80 oil roller Oilbrush	40 - 60
,	Wood Cork	
		R10 0-19°

ARTNO. VA	RIANT				GISCODE
10509-000003 sat	tin 10	0 l/2.5 l/750 ml -	/4/6	42/120/480	Ö60
10509-000004 ext	tra-matte 10	0 l/2.5 l/750 ml -	-/4/6	42/120/480	060




ART.-NO. 10501-000000

HardwaxOil EcoPlus

Natural hard wax oil.

- · Smooth and full bodied appearance
- One roller application is sufficient
- Oxime and cobalt free
- · Extremely economical to use
- Easy and safe application
- · Water and dirt resistant
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3

VARIANT		6	600	GISCODE
semi-gloss	2.51	4	120	Ö20+






Markant

Natural hard wax oil.

- Layer-forming, wear-resistant
- Smooth and full bodied appearance
- · Water and dirt resistant
- · Easy and safe application
- · Accentuates the natural beauty of the wood
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas
- Suitable for children's toys as per EN 71-3

ARTNO.	VARIANT		6		GISCODE
10508-000000	semi-gloss	750 ml/2.5 l/10 l	6/4/-	480/120/42	Ö60





Markant Color


Colored natural hard wax oil.

- · Layer-forming, wear-resistant
- · Smooth and full bodied appearance
- Water and dirt resistant
- Easy and safe application
- · Accentuates the natural beauty of the wood
- · All variants can be mixed with each other
- Suitable for children's toys as per EN 71-3

APPLICATION DEVICE	ml/m ²
Microfibre 60 - 80 oil roller Oilbrush	60 - 100
Wood	

ARTNO.	VARIANT		6	المواد	GISCODE
10508	Various colors	750 ml	6	480	Ö60



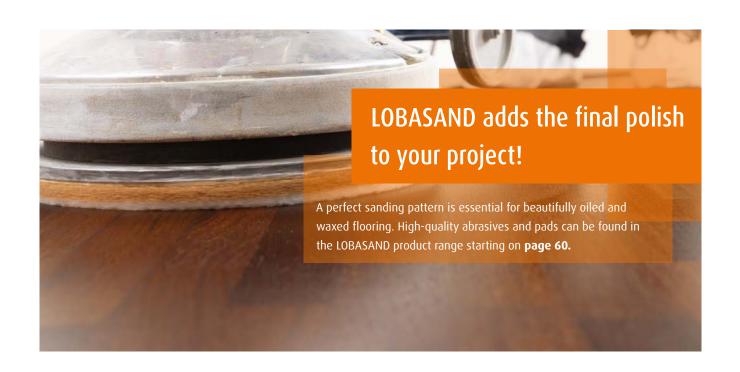

List of Wood Species for Oil & Wax Systems

1. European wood species

Wood type	2K Impact0il	Akzent 100 Oil	Hardwax0il/Markant	HardwaxOil Nature	HardwaxOil EcoPlus
Maple	+	+	+	+	+
Acacia / Robinia	+	+	+	+	+
Acacia/steam-treated Robinia	+	+	+	♦	+
Birch	+	+	+	+	+
Pear tree	♦	♦	-	-	♦
Steam-treated beech	+	+	+	♦	+
Beech	+	+	+	+	+
0ak	+	+	+	+	+
Alder	+	+	+	+	+
Ash	+	+	+	+	+
Spruce	+	+	+	+	+
Chestnut	+	+	+	+	+
Pine	+	+	+	+	+
Cherry	+	+	+	♦	+
Larch	+	+	+	+	+
Walnut	+	+	+	♦	+
Olive	+	+	♦	♦	+
Smoked oak	+	+	+	♦	+
Elm	+	+	+	♦	+

2. Exotic wood species

2. Exotic wood species					
Afrormosia	+	+	+	♦	+
Arrurra Vermelho	+	+	+	♦	+
Bilinga	+	+	+	+	+
Cabreuva	+	+	+	♦	+
Cumaru / almendrillo	+	+	+	+	+
Doussie / afzelia	+	+	+	♦	+
Eucalyptus/spotted gum	+	+	+	+	+
Eucalyptus/jarrah	+	+	_	-	+
Guatambu	+	+	♦	♦	+
Hevea	+	+	+	+	+
Ipe / lapacho	♦	♦	-	-	♦
Iroko / kambala	+	+	+	♦	+
Iron wood	+	+	♦	♦	+
Jatoba / Brazilian cherry	+	+	+	♦	+
Coconut	+	+	-	-	+
Kotibe	+	+	+	♦	+
Mahogany	+	+	+	♦	+
Massaranduba	+	+	♦	♦	+
Mecrusse	+	+	+	♦	+
Merbau	+	+	+	♦	+
Muhuhu	+	+	+	♦	+
Padouk	+	+	_	_	+
Panga Panga	+	+	+	♦	Ŧ
Piguia Marfin	+	+	♦	♦	+
Pitch pine (old floors)	+	+	+		Ŧ
Hard pine (pitch pine new)	+	+	♦	♦	+
Purpleheart	+	+	♦	♦	+
Sucupira	+	+	+	♦	+
Tasmanian oak	+	+	+	+	+
Teak	+	+	+	♦	+
Wenge	+	+	+	♦	+
Cypress	♦	♦	♦	♦	♦

3. Other substrates

5. C 2005					
Multiplex	+	+	♦	♦	+
OSB plates	♦	♦	♦	♦	♦
V100 chipboards	♦	\	\	\Q	\Q

^{+ =} Can be used without restrictions

^{♦ =} Use may lead to problems. We recommend consulting LOBA.

^{- =} Use not recommended

^{*} Can be used in full structure



Application Tools for Oil & Wax Systems



	OIL ROLLER		FINISH ROLLER		TROWEL
	Micro 60-80	Micro 100-120	Universal 100	Deluxe 120	Trowel
	ARTNO. 16236-1	ARTNO. 16236	ARTNO. 16233	ARTNO. 16234	ARTNO. 16083
2K ImpactOil transparent	✓	-	-	-	-
PreTone	-	✓	-	-	-
Akzent 100 Oil	✓	-	-	-	✓
HardwaxOil EcoPlus	✓	-	-	-	-
Markant/Hardwax0il	✓	-	-	-	✓
HardwaxOil Nature	✓	-	-	-	✓

^{✓ =} Can be used without restrictions

Use our download area

- Set-up recommendations
- Technical information
- Application videos



→ www.loba.de/int_en/downloads


Consumption calculator

Your handy helper for quickly calculating how much you need can be found at www.loba.de/int_en/services and on every product page.



^{- =} Use not recommended

⁼ Observe technical information

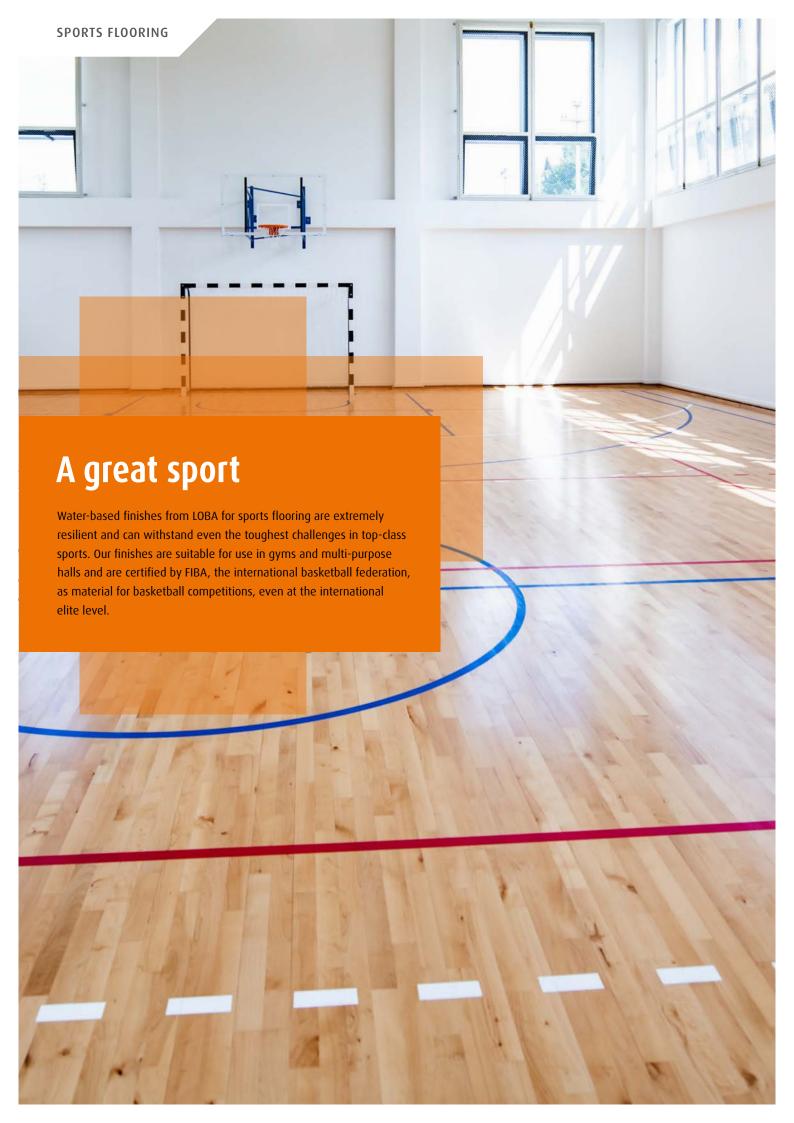



SportFinish

1K water-based sports hardwood floor finish.

- Meets the coefficient of sliding friction of the European sports floor standard
- Good price/performance ratio
- · Easy and safe application

Deluxe 120 roller Microfibre 100 - 120 roller Wood	
U EECI CONSECTED	20
training of the Stagnord Stagnord Commerce Comme	
FIBA EN 14904	

ARTNO.	VARIANT			GISCODE
11537-000001	semi-gloss	10	60	W2+



2K UltraSport

Water-based 2-component polyurethane finish for hardwood floors.

- Meets the requirements of German and European sports flooring standards
- · Extremely high scuff-mark resistance
- Easy and safe application
- Excellent wear resistance

	g/m²
Deluxe 120 roller Microfibre 100 - 120 rolle	100 - 120
Wood Linoleum PVC	
Lide Collection Co.	A 1)
DIN 18032 EN 14904	
1) extra matte	

ARTNO.	VARIANT		\subseteq	600	GISCODE
11401-900005	extra matte	5 kg	2	96	W3/DD+
11401-900003	satin	5 kg	2	96	W3/UU+





SportRemover

Intensive cleaner for sports floors.

- Removes old layers of care product
- · Removes stubborn dirt
- · pH-neutral, also suitable for linoleum floor coverings

ARTNO.	Ö	600	GISCODE
10078-000000	101	60	GG60

Wood | Linoleum | PVC

All water-resistant flooring



SportCleaner

Highly concentrated, pH-neutral cleaner.

- Great cleaning power
- A concentrate with a very high yield, 11 of LOBA SportCleaner makes up to 200 l of ready-to-use cleaning solution
- $\boldsymbol{\cdot}$ Material-protecting and pH-neutral
- Environmentally friendly biodegradable cleaner
- · Ideal for use with cleaning machines

ARTNO.		जि	GISCODE
10178-000000	101	60	GU73



SportRefresh

Water-based wipe care product.

- For regular wipe care in sports halls
- Can also be machine applied
- Meets the requirements of German and European sports flooring standards
- · Extremely economical concentrate

EN 14904

ARTNO.		600	GISCODE
10059-200000	101	60	GU83



SportCare

Water-based floor care product.

- Maintains the floor's value and appearance
- · Provides long-term protection against wear
- $\boldsymbol{\cdot}$ Brings new shine to heavily used and worn floors
- Prevents scuff marks from shoe soles in the finish
- Especially safe to walk on
- · Easy and safe application
- Extremely high scuff-mark resistance

Wood | Linoleum | PVC


Linoleum | PVC






DIN 18032 EN 14904

ARTNO.		6	6-0-0	GISCODE
10055-000000	11/101	12/-	480/60	GE20

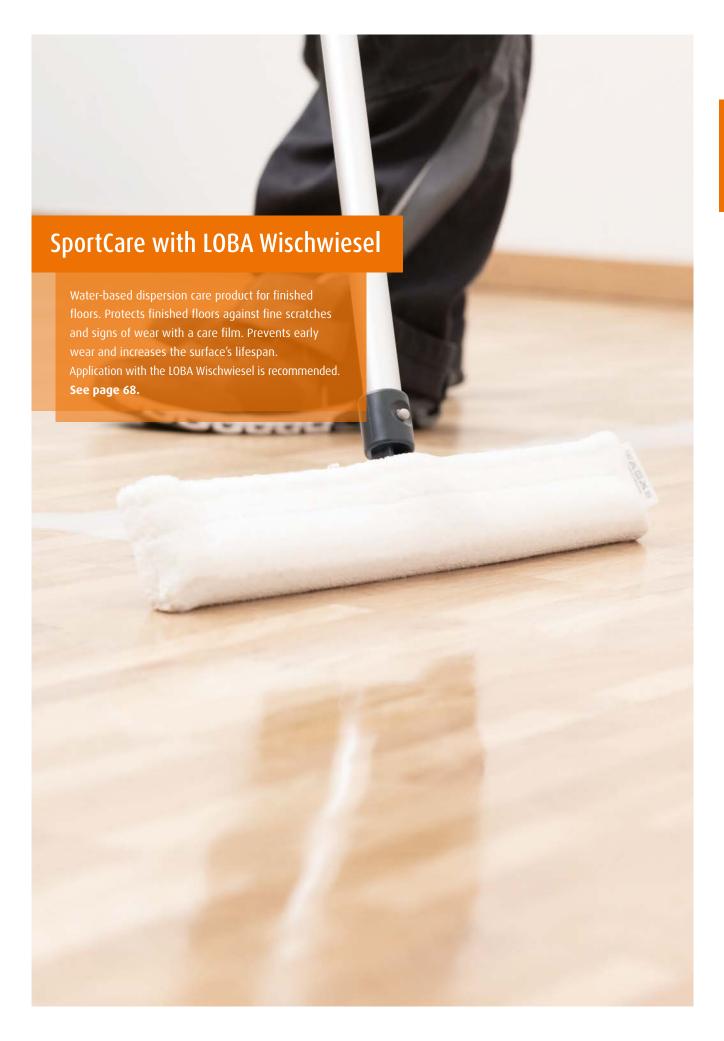

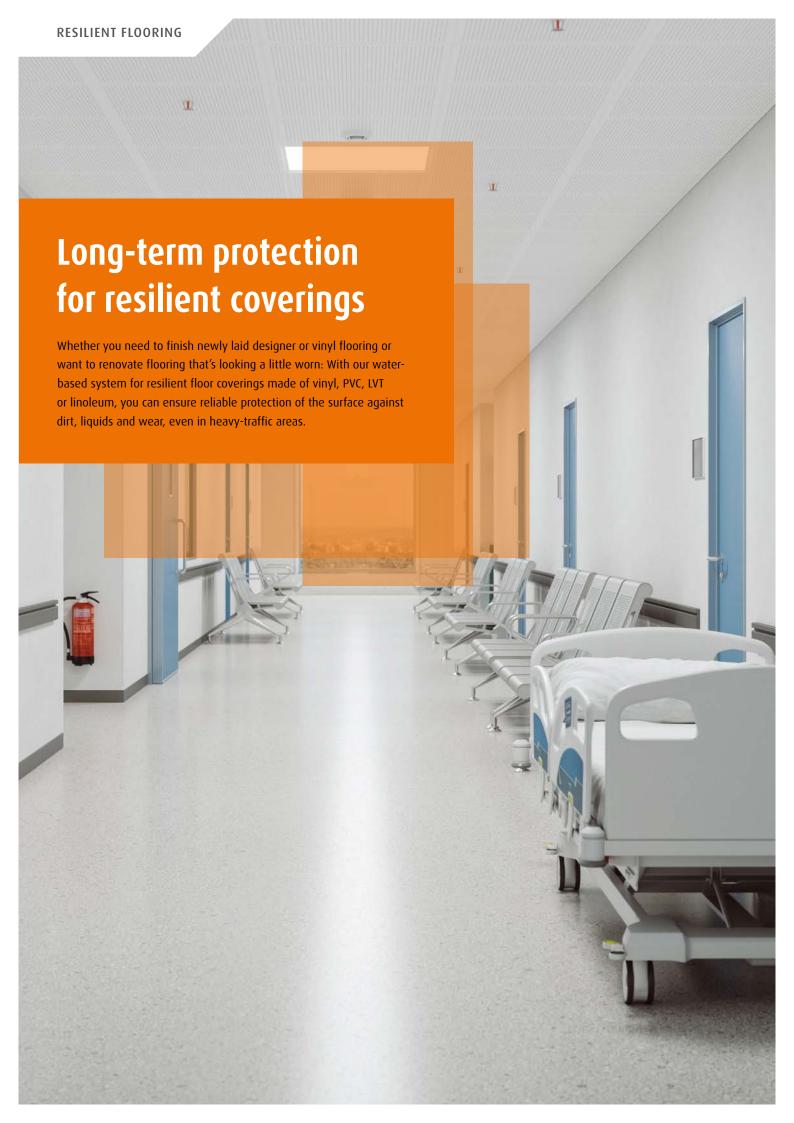



2K UltraElastic

Water-based 2-component polyurethane finish for resilient floorings.

- Lap-free application
- Specially developed for renovating linoleum, PVC, CV and LVT coverings
- Reduces the cleaning effort due to reduced dirt adhesion
- · Optimised joint protection safeguards the substrate
- Certified anti-slip properties as per DIN EN 16165:2021-12 for work areas

Stress level 1 2 3 4 5 6 7 8 9 10 Residential Commercial Extreme Linoleum PVC	APPLICATIO	N DEVICE	g/m ² 60 - 80
	1 2 3		
	Linoleum	PVC) R10	


ARTNO.	VARIANT				GISCODE
11043-000005	extra matte	5 kg	2	96	W3/DD+

Tip:

Can be re-finished within 24 hours without intermediate sanding, and thereafter with only one intermediate sanding. Intermediate sanding before the last application improves the final visual result. Simply use LOBASAND PerforatedPad P180 or a finer grain size; alternatively you can use LOBASAND SandingGrid P180 or a finer grain size.





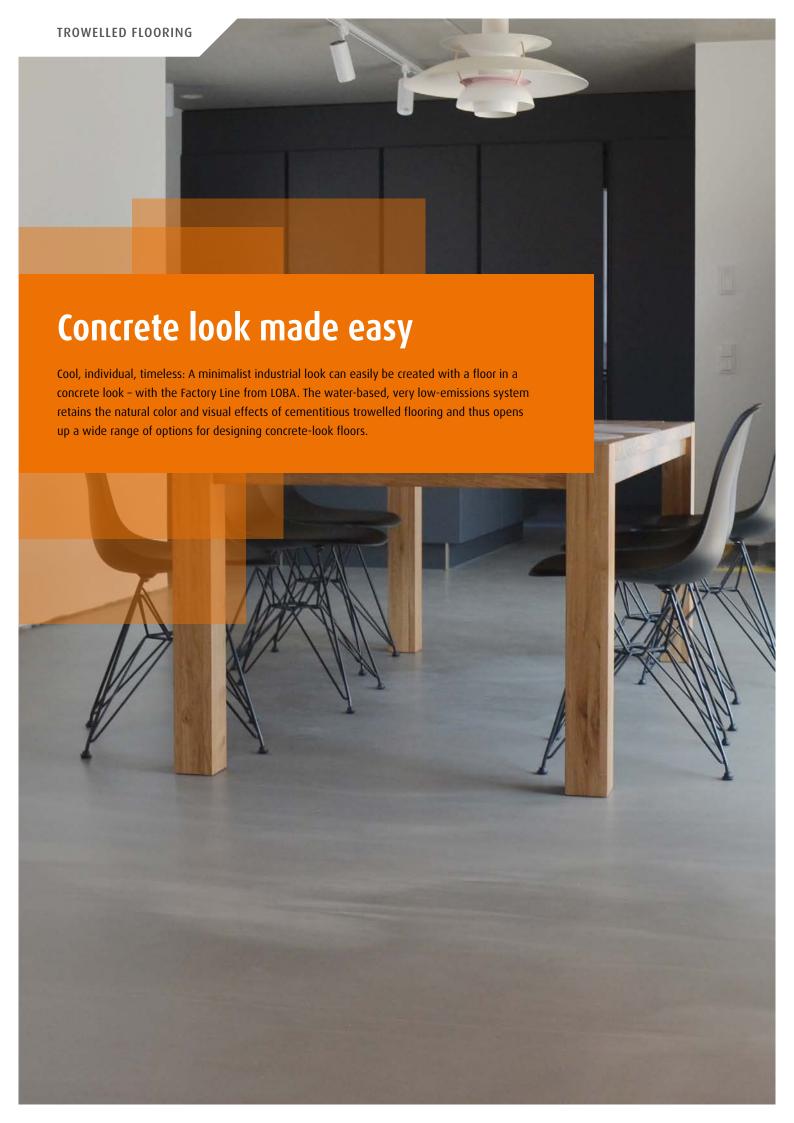



FactoryBase

Water-based roller primer for cement-based levelling compounds for direct use.

- · Easy and safe application
- Time efficient through application in a 2-coat system (1x primer 1x finish)
- Optimizes adhesion between levelling compound and finish
- Applicable in a system with LOBA 2K FactoryStyle and numerous levelling compounds

ARTNO.		6	600	GISCODE
11751-000000	51	4	128	W2+





2K FactoryStyle

2K water-based polyurethane finish for cementitious levelling compounds for direct use.

- Particularly low emission according to EMICODE EC1 Plus
- Uniform matt surface
- Wide range of applications also in public areas due to anti-slip R9
- Time efficient through application in a 2-coat system (1x primer 1x finish)





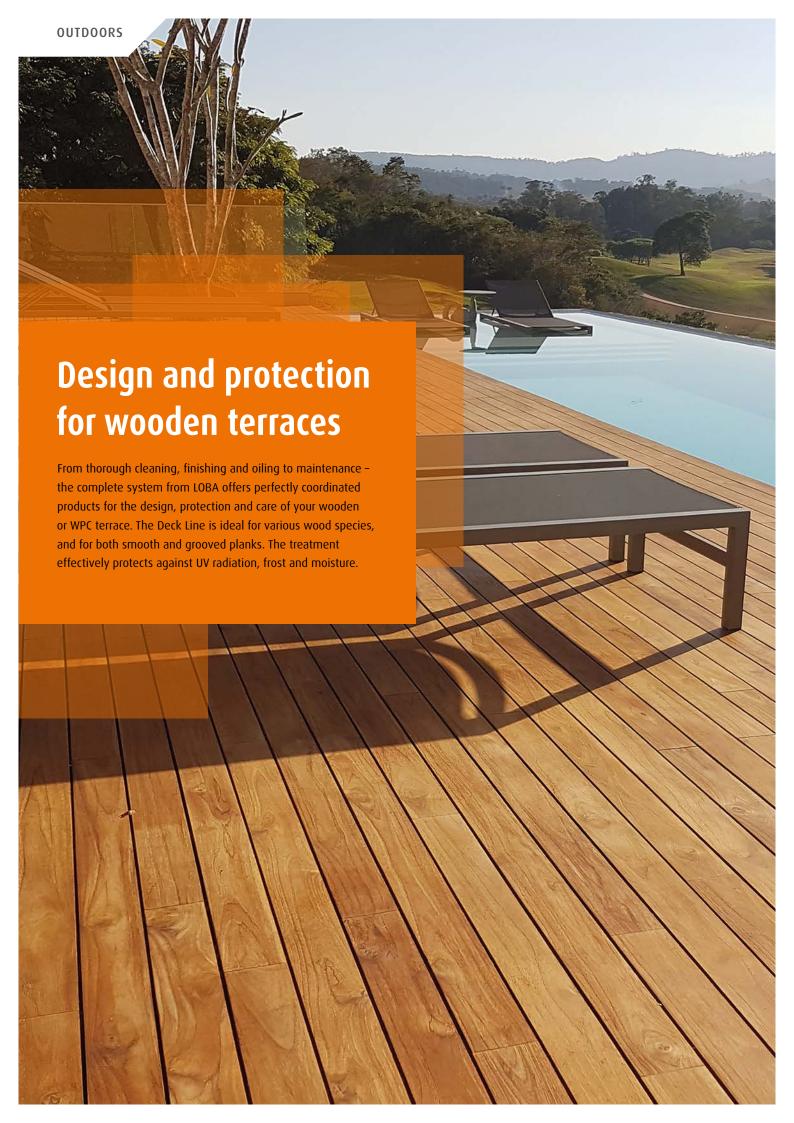



DeckPreparePrimer for wooden decks in outdoor areas.

- · Delays the weather-related graying of wood
- · Strengthens the protective effect of the subsequent surface refinement
- · Improves the adhesion of the subsequent coating to the substrate
- · Easy and safe application
- · Quick-drying
- · Color- and odorless
- · Environmentally friendly
- · Applicable in a system with LOBA DeckFinish Color. Optional application before impregnation with LOBA DeckOil/Color

ARTNO.		6	600	GISCODE
11841-000000	51	4	128	W2+

APPLICATION DEVICE Oilbrush Brush	ml/m ²
Wood	




DeckFinish

1C water-based finish for exterior wooden surfaces.

- · Emphasizes the natural wood color
- · Chlorine resistant
- · Easy and safe application
- · No roughening of the wood
- · Short drying time
- · More durable than oiled surfaces
- · Suitable for smooth and grooved planks
- · Mixable and tintable with all color variants

ARTNO.	VARIANT		\Box		GISCODE
11842-000000	transparent	51	4	128	W3+






DeckFinish Color

1C water-based finish for exterior wooden surfaces.

- · Deep protection against UV radiation, frost and moisture
- · Chlorine resistant
- Easy and safe application
- · No roughening of the wood
- · Short drying time
- · Suitable for all types of wood
- Suitable for smooth and grooved planks
- Applicable in a system with LOBA DeckPrepare

ARTNO.	VARIANT			600	GISCODE
11842	various colors	51	4	128	W3+











Color samples are not binding



VARIANT

transparent

ART.-NO.

10616-000000

Deck0il

Oil impregnation for wooden surfaces in outdoor areas.

- $\boldsymbol{\cdot}$ Deep protection against frost and moisture
- · Good penetration behaviour
- · Easy and safe application
- Also suitable for impregnation of garden furniture

 \Box

6/4/-

480/120/42

- · Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability

GISCODE

Ö60

• Suitable for children's toys as per EN 71-3

APPLICATION DEVICE	ml/m²
Oilbrush Brush	80 - 120
Wood	
	D
R10 10-19° ≥18	B



DeckOil Color

750 ml/2.5 l/12 l

Colored oil impregnation for wooden surfaces in outdoor

- Deep protection against UV radiation, frost and moisture
- Good penetration behaviour
- Easy and safe application
- · Also suitable for impregnation of garden furniture
- Applicable on smooth and grooved planks
- The preceding use of LOBA DeckPrepare increases the durability
- Suitable for children's toys as per EN 71-3

APPLICATION DEVICE Oilbrush Brush	ml/m ²
Wood	
R10 P B ≥18°	











900148

Color samples are not binding

Wood

Wood | WPC

Wood

Wood | WPC



DeckDegrayerSpecial cleaner for wooden surfaces in outdoor areas.

- Ideal degraying preparation for follow-up treatment
- Easy and safe application
- · Can be used on horizontal and vertical surfaces and garden furniture, does not drip
- · No sanding necessary
- · Applicable to all wood species

ARTNO.		6	6-6-6	GISCODE
10741-000000	2.51	6	144	GG10



DeckCleaner

Maintenance cleaner for outdoor areas.

- · Can be used for maintenance and intensive cleaning
- Very productive
- Suitable for oiled and finished wood and WPC

ARTNO.		6	600	GISCODE
10731-000000	2.51	6	144	GU70



DeckRefresh

Water-based wipe care for outdoor areas.

- · Thorough, gentle wipe care
- Gives the surface a silky sheen
- Easy and safe application
- · No remover necessary due to a self-emulsifying formula
- · Suitable for oiled and finished wood surfaces in outdoor areas

ARTNO.		\Box	6	GISCODE
10711-000000	2.51	6	144	GU40




WPC Refresh

Maintenance oil based on solvents.

- Optical upgrading for WPC and oiled wood surfaces
- · Brings back the silky matte look
- · Easy and safe application
- · Suitable for WPC and oiled wood surfaces

ARTNO.			100	GISCODE
10721-000000	11	6	480	Ö60

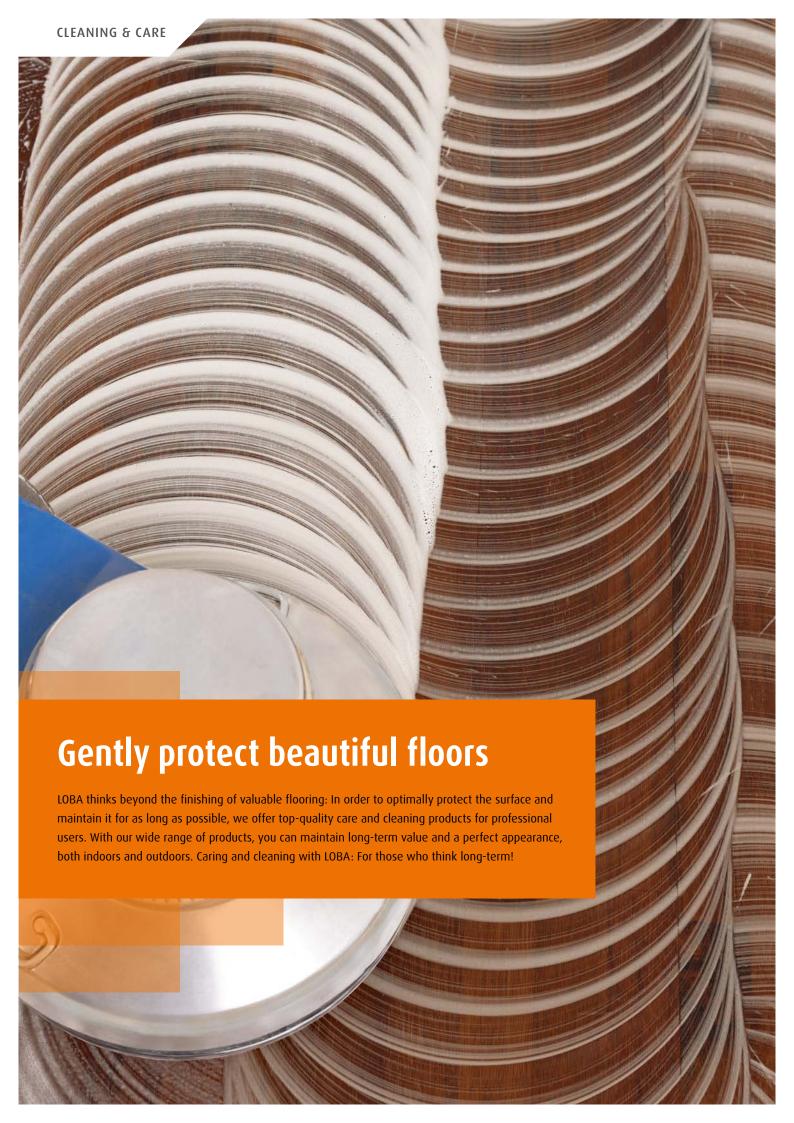

Laminate

All water-resistant flooring



Cleaner

Highly concentrated, pH-neutral cleaner.

- · Excellent cleaning effect thanks to superb dirt-dissolving power
- Extremely economical concentrated, 1 litre of LOBA Cleaner yields up to 200 litres of ready-to-use cleaning solution
- · Material-protecting and pH-neutral
- $\boldsymbol{\cdot}$ Can be used universally for all waterproof surfaces
- · Environmentally friendly biodegradable cleaner

ARTNO.		6		GISCODE
10175-400000	11/101	12/-	480/60	GU73



LaminateCleaner

Highly concentrated, pH-neutral cleaner.

- Significantly reduces the risk of swollen edges with laminate flooring
- Extremely economical concentrate
- Also suitable for plastic-coated furniture, walls, doors and windows
- · Streak-free drying
- · Material-protecting and pH-neutral
- Excellent cleaning effect thanks to superb dirt-dissolving power

ARTNO.		6	600	GISCODE
10443-000000	1	12	480	GU50





CareRemover

Remover for finished floors.

- · Removes old layers of care product
- · Removes stubborn dirt
- \cdot Can be used universally on various finished floors
- ullet Material-protecting and pH-neutral

ARTNO.		6		GISCODE
10065-900000	11/101	12/-	480/60	GG60

Wood | Cork | Linoleum | PVC | Tile

Wood | Cork | Linoleum | PVC | Tile

Wood

Cork



ParkettCare

Water-based floor care product.

- Maintains the floor's value and appearance
- Provides long-term protection against wear
- Can be used without restriction for prefinished wood floors and for finished UV surfaces
- Recommended by leading industrial wood floor manufacturers
- $\boldsymbol{\cdot}$ Brings new shine to heavily used and worn floors
- Easy and safe application

ARTNO.	VARIANT		\subseteq	600	GISCODE
10011-400003	satin	11/51	12/4	480/128	GE10
10011-400000	silk gloss	11/51/101	12/4/-	480/128/60	GEIU



FloorCare

Water-based floor care product.

- · Maintains the floor's value and appearance
- · Provides long-term protection against wear
- $\boldsymbol{\cdot}$ Can be used universally on various finished floors
- $oldsymbol{\cdot}$ Brings new shine to heavily used and worn floors
- Easy and safe application

ARTNO.	VARIANT			555	GISCODE
10490-400003	satin	11/51	12/4	480/128	GE10
10490-400000	silk gloss	11/101	12/-	480/60	GE20
10490-400180	anti-slip	10	-	60	GE10



KorkCare

Water-based floor care product.

- · Universal care product for all finished cork flooring
- · Brings new shine to heavily used and worn floors
- · Easy and safe application
- · Water-based and eco-friendly
- $\boldsymbol{\cdot}$ Maintains the floor's value and appearance
- Provides long-term protection against wear
- ullet Recommended by leading manufacturers of prefabricated cork

ARTNO.		6	6-0-0	GISCODE
10265-400000	1l	12	480	GE10



PermanentCare

Polyurethane floor care product.

- Particularly wear-resistant, pure PU permanent care product
- · Provides long-term protection against wear
- · Applies a matt shine to tired and worn floors
- Can be used universally on various finished floors
- Extremely high scuff-mark resistance
- · Hoher Festkörpergehalt

ARTNO.	VARIANT		\Box	500	GISCODE
10189-200003	satin	11/51	12/4	480/128	GE10
10189-200000	gloss	11/51	12/4	480/128	GEIU





Refresh

Water-based wipe care product.

- Universell auf verschiedenen lackierten und geölten Belägen einsetzbar
- Extremely economical concentrate
- Can also be machine applied
- · Clearly visible care effect
- · No basic cleaning required



DIN 18032

Wood | Cork | Linoleum | PVC | Tile

Wood | Cork | Linoleum | PVC

ARTNO.		6	6-0-0	GISCODE
10046-200000	11/101	12/-	480/60	GU40

Product and name changes at a glance

There have been significant changes in the range of cleaning and care products. You will find all changes here.

The following articles have been renamed

New name	Former name
PermanentCare	V6 Finish
Refresh	CareCleaner
WaxRefresh	WaxCleaner
Sportbodenpflege/SportRefresh	Sportbodenpflege / GymCare

The following articles are new

SportCleaner SportCleaner

The following articles have been optimized and renamed

New name	Former name
ParkettOil Deluxe	Parkett0il Pro



Parkett0il

Maintenance oil solvent-based.

- Refreshes tired and worn floors
- Removes slight damage in oiled surfaces
- Ideal for full-surface care or partial improvements
- · Easy and safe application
- Preserves the anti-slip properties of oiled flooring

ARTNO.		6	600	GISCODE
10461-400000	11/51	6/4	480/120	Ö60





ParkettOil Deluxe

High performance maintenance oil.

- Ideal for full-surface care or partial improvements
- · Specially for re-impregnation after intensive cleaning
- $\boldsymbol{\cdot}$ Preserves the anti-slip properties of oiled flooring

ARTNO.	VARIANT			الموا	GISCODE
10466-200000	Transparent	11/51	6/4	480/120	Ö40+
10466-200126	White	11	6	480	Ö40+



ParkettWax

Maintenance wax solvent-based.

- Protects the floor against water and dirt
- Classic floor wax
- · Closes open pores in the wood
- · Easy to polish

ARTNO.	VARIANT		\Box	6-6-6	GISCODE
10429-400000	Transparent	11/121	6/-	480/50	Ö60
10429-480031	Red brown	12	-	50	-





WaxRefresh

Water-based wipe care product.

- · Leaves behind a thin protective wax film
- · Extremely economical concentrate
- Material-protecting and pH-neutral
- $\bullet \ \ \text{Good cleaning effect}\\$
- Universally applicable on various oiled/waxed floors

ARTNO.		6	600	GISCODE
10041-200000	10 /1	-/12	60/480	GU73



Wood

Wood

Wood | Cork

Wood | Cork



WaxRemover

Remover solvent-based for oiled and waxed floors.

- Classic intensive cleaner for oiled/waxed floors
- · Also suitable for water-sensitive flooring

ARTNO.		6	6-6-3	GISCODE
10309-400000	11	6	480	GG0

Wood | Cork | Linoleum | PVC

Wood | Cork



ParkettSoap

Water-based soap for oiled and waxed floorings.

- Good cleaning effect
- · Care effect

ARTNO.	VARIANT	Ö			GISCODE
10048-000000	Transparent	11/51	12/4	480/128	GU70
10048-900126	White	11	12	480	GU/U



Nature0il

Water-based maintenance oil.

- Refreshes tired and worn floors
- Removes slight damage in oiled surfaces
- Solvent-free
- · Odor neutral
- Innovation by LOBA

ARTNO.		6	553	GISCODE
10100-000000	11/51	15/4	540/128	Ö10+



NatureWax


Water-based maintenance wax.

- Protects the floor against water and dirt
- · Easy and safe application
- · Solvent-free
- Odor neutral
- Easy to polish
- Innovation by LOBA

ARTNO.		6	500	GISCODE
10105-000000	11/51	15/4	540/128	GE10



Wood

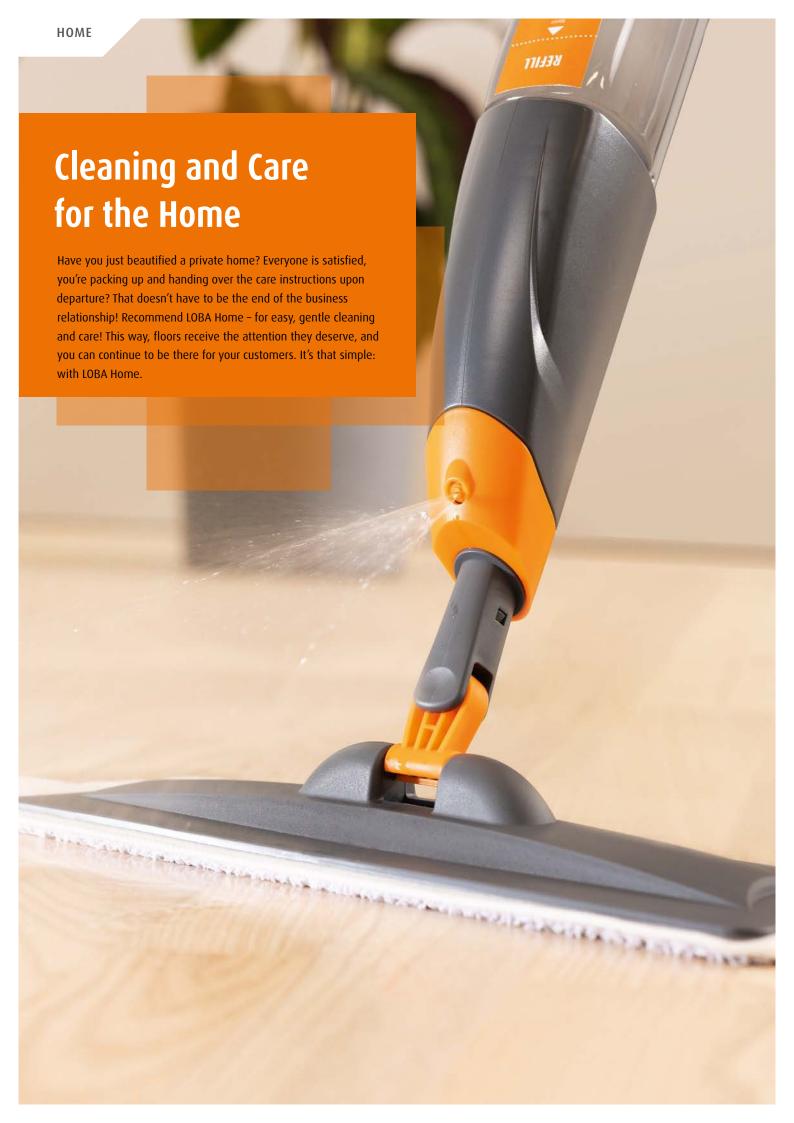



Universal Cleaner Concentrate

For maintenance/intensive cleaning.

- Ideally suited for intensive and maintenance cleaning
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- $\bullet \ \ \text{Biodegradable, without microplastics}$

ARTNO.		6	GISCODE
10023-000000	500 ml	12	GU70

Water-resistant surfaces with/without

underfloor heating

Water-resistant surfaces



Universal Cleaner Spray

For maintenance cleaning.

- · Ready-to-use spray
- · Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

ARTNO.		6	GISCODE
10042-000000	500 ml	12	GU40



	PREVIOUS PRODUCT RANGE	NEW PRODUCT RANGE	
	FloorCleaner+	Universal Cleaner Concentrate	(Concentrate)
CLEANING	CleanFix	Universal Cleaner Spray	•
CLEANING		Cleaner for finished hardwood floors	(Concentrate)
		Cleaner for oiled waxed hardwood floors	(Concentrate)
	ParkettRefresh⁺ for finished floors	Care for finished hardwood floors	(Concentrate)
CARE	ParkettRefresh⁺ for oiled floors	Care for oiled waxed hardwood floors	(Concentrate)
	ElasticRefresh+ for PVC, vinyl, design floors and linoleum	available as of summer 2024	
	SprayMop Set	Spray Mop Set	•
ACCESSORIES	Refill	Spray Mop Refill	
	Мор	Мор	•
	Mop Cover	Mop Pad	•



Cleaner for finished hardwood floors

Concentrate for maintenance/intensive cleaning.

- · Ideally suited for intensive and maintenance cleaning
- · Fast drying without streaks
- · pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

ARTNO.		6	GISCODE
10021-000000	500 ml	12	GU70



Cleaner for oiled | waxed hardwood floors

Concentrate for maintenance/intensive cleaning.

- Ideally suited for intensive and maintenance cleaning
- · Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

ARTNO.		6	GISCODE
10022-000000	500 ml	12	GU70



Care for finished hardwood floors

Concentrate for maintenance/intensive care.

- Ideally suited for intensive and maintenance care
- Fast drying without streaks
- · pH-neutral, free of solvents and plasticizers
- · Biodegradable, without microplastics
- · Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles M23

ARTNO.			GISCODE
10036-000000	500 ml	12	GU40



Care for oiled | waxed hardwood floors

Concentrate for maintenance/intensive care.

- · Ideally suited for intensive and maintenance care
- Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- $\bullet \ \ \text{Biodegradable, without microplastics}$
- Slip-resistant and sure-footed
- Prevents scuff marks caused by shoe soles M23



Finished wood floors with/without

Oiled/waxed wood floors with/

without underfloor heating

underfloor heating

Oiled/waxed wood floors with/

without underfloor heating

Finished wood floors with/without

underfloor heating



Spray Mop SetMop with integrated spray function.

- Quick and easy cleaning without a cleaning bucket
- Damp mopping ideal for wooden floors
- Includes microfiber mop pad and 250 ml refill cleaning concentrate

ARTNO.	б	ਰਹ ਰ
16250-200000	12	192



Mop

Mop for application of LOBA cleaning and care products

- Including high-quality microfiber mop pad (washable up to 60° C without fabric softener)

ARTNO.	б
16244-200000	24



Spray Mop Refill

High-yield cleaning concentrate for refilling the LOBA Spray Mop.

- Easy dosing and refilling of the LOBA Spray Mop container
- · Fast drying without streaks
- pH-neutral, free of solvents and plasticizers
- Biodegradable, without microplastics

ARTNO.	Ö	6	GISCODE
10177-200000	250 ml	45	GU40



Mop Pad

Replacement cover for LOBA Spray Mop and Mop.

- \bullet High quality microfiber mop pad (washable up to 60° C without fabric softener)
- Suitable for LOBA Spray Mop and Mop


ARTNO.	б
16253-200000	100

Water-resistant floors with/without	
underfloor heating	


Water-resistant floors

Water-resistant floors

Water-resistant surfaces

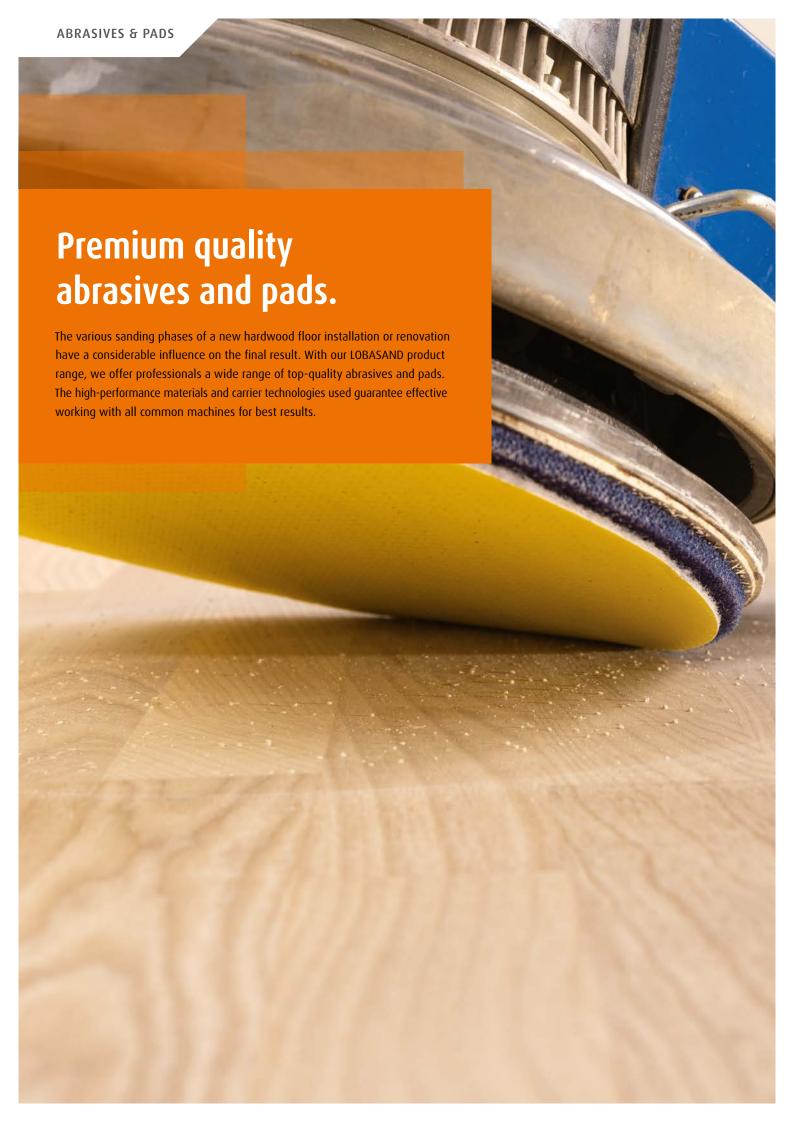

LOBA sanding recommendations: the right combination for every purpose

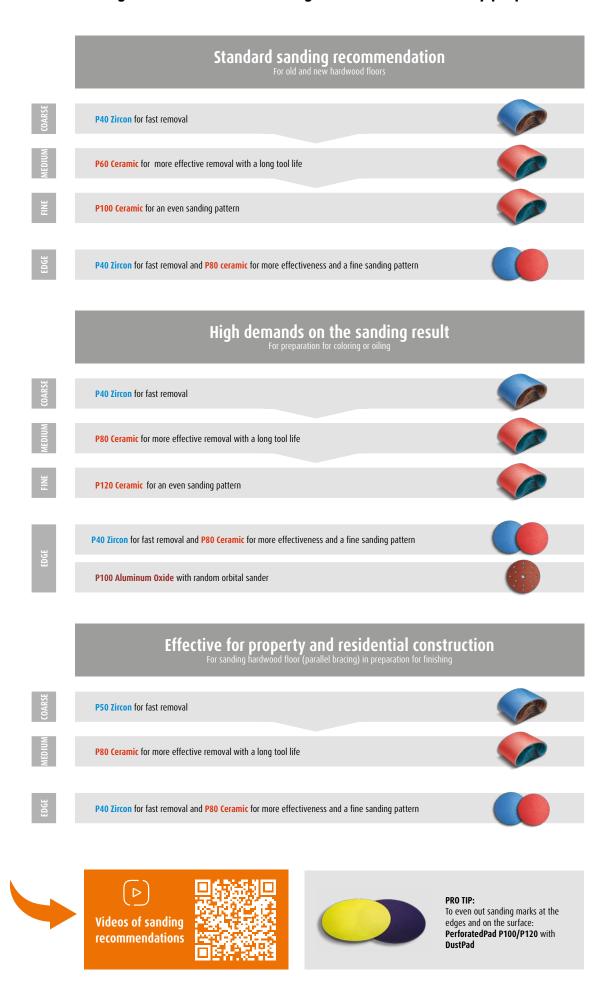




Premium | Ceramic For the most beautiful sanding pattern and the best tool life

- · Achieves the best sanding pattern
- · Very long service life
- · Extreme heat resistance
- · Best price-performance ratio on the market, as it is very resilient
- Suitable for all surface treatments
- · For sanding UV-coated floors

Product	CERAMIC		Article number	Dimensions	Coarse sanding		Medium sanding			9	Fine sanding			Final sanding		Intermediat sanding		
		10	17107-000	200 x 750 mm		P36	P40		P50	P60	P80		P100	P120				
Belt		10	17103-250	250 x 750 mm		P36	P40		P50	P60	P80		P100	P120				

Hook & Loop disc 15-hole		50	17161-150	ø 150 mm			P40		P60	P80	P100	P120			P180	
		50	17160-140	ø 140 mm			P40		P60							
Hook & Loop disc		50	17159-150	ø 150 mm	P24	P36	P40	P50	P60	P80	P100	P120				
		50	17160-200	ø 200 mm	P24	P36	P40	P50	P60	P80	P100	P120	P150	P180		
Hook & Loop disc Center hole	•	50	17170-178	ø 178 mm	P24	P36	P40	P50	P60	P80	P100	P120				

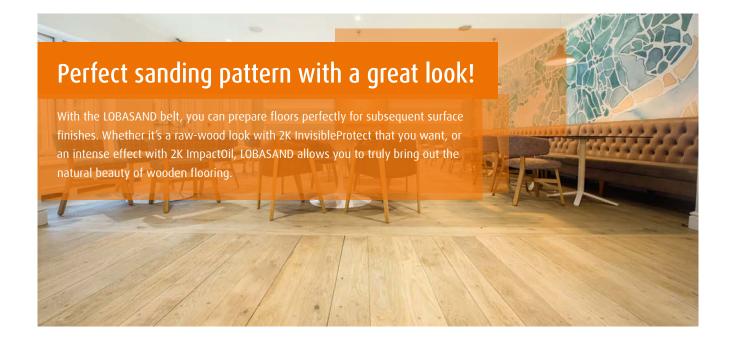



Dynamic | Zircon For fast results and high abrasion

- · Fast removal
- · Highly aggressive
- Clogs less because of half-open spreading
- · Good heat resistance
- 100% zircon, unique selling proposition on the market

Product	ZIRCON		Article number	Dimensions	C	oarse :	sandin	g	M	edium	sandiı	ng	Fin	e sand	ing	Fir sand	ial ding	Interm sand	
n a la		10	17105-000	200 x 750 mm		P24	P36	P40		P50	P60	P80		P100	P120				
Belt		10	17101-250	250 x 750 mm			P36	P40		P50	P60	P80		P100	P120				
Hook & Loop disc 9-hole		50	17140-125	ø 125 mm					P40		P60		P80	P100	P120				
Hook & Loop disc 15-hole		50	17173-150	ø 150 mm					P40		P60		P80	P100	P120			P180	
		50	17112-140	ø 140 mm			P36				P60			P100	P120				
Hook & Loop disc		50	17112-150	ø 150 mm		P24	P36		P40		P60		P80	P100	P120				

P24 P36

P60

P40 P50 P60

P80

P80

P100 P120

P100 P120

17112-200...

17171-178...

ø 200 mm

ø 178 mm

50

50

Hook & Loop disc Center hole



Classic | Aluminum Oxide For price-conscious projects

- · Leaves behind fewer visible scratches
- · Low-cost price per unit
- ${\boldsymbol{\cdot}}$ Good for preparation for subsequent impregnation or coloring

Product	ALUMINUM OXIDE		Article number	Dimensions	,	Coarse :	sanding	ı	٨	Nedium	sandin	g	Fir	ne sand	ing	Final s	anding	Interm sand	
Belt		10	17101-000	200 x 750 mm	P16	P24	P36	P40		P50	P60	P80		P100	P120				
Hook & Loop disc 15-hole		50	17142-150	ø 150 mm		P24	P36		P40		P60		P80	P100	P120				
Hook & Loop		50	17111-150	ø 150 mm	P16	P24	P36		P40		P60		P80	P100	P120				
disc		50	17115-200	ø 200 mm					P40		P60		P80	P100	P120				
Hook & Loop disc Center hole	0	50	17110-178	ø 178 mm	P16	P24	P36		P40		P60		P80	P100	P120				
Hook & Loop strip	• • • •	100	17060-000240	81 x 133 mm															P240
Triangle		50	17041-000	ø 80 mm				P40			P60		P80	P100					

Other abrasives and pads

Product		6	Article No.	Dimensions Grain size	Range of use
SpecialPad beige		10	16550-406410	ø 406 x 10 mm	Levelling
Pad for beige pad holder		25	16550-250210	250 x 120 x 10 mm	Levelling
HandPadSet beige		1 + 25 pads	16555-000000	85 x 135 x 10 mm	Levelling
SpecialPad green		10	16550-406420	ø 406 x 10 mm	Thorough cleaning
Pad for pad holder green		25	16550-250310	250 x 120 x 10 mm	Thorough cleaning
ScrubberPad black		1	16552-406010	ø 406 mm	Thorough cleaning
NormalPad white		10	16550-124352	ø 406 x 10 mm	Polishing
SuperPad white		5	16551-124662	ø 406 x 20 mm	Polishing
Polishing fleece		10	16560-000000	ø 406 mm	Intermediate sanding
DustPad violet		5	17039-410000	ø 410 mm	Dust reduction
				ø 410 mm	For single-disc machines
PerforatedPad yellow		10	17037-410	80/100/120/150/180	(fine and intermediate sanding)
				ø 406 mm	
SandingGrid	938 030	20	17025-406	60/80/100/120/150/180	For single-disc machines (fine and intermediate sanding)
				ø 406 mm	
DoubleDisc	60	10	17021-000	16/24/36/40/60/80/100/120	For single-disc machines
Adhesive fabric		50	17010-178000	ø 178 mm	For circular sanding machines
Pad holder with telescopic bar		1	16553-000000	Extendable to 97-184cm	Levelling and thorough cleaning





Roller Deluxe 120

Ensures the recommended quantity (approx. 120 g/m^2). No roller frame included.

ARTNO.	DESCRIPTION	\Box
16234-000000	25 cm roller	12



Roller Microfibre 100-120

For all LOBA water-based finishes as well as the primers EasyPrime and VivaPrime and Sealer FR. Application quantity between 100-120 g/m². No roller frame included.

ARTNO.	DESCRIPTION	\Box
16236-000000	25 cm roller	12



Roller Universal 100

For LOBA Rush as well as LOBA primers PrimaSeal Plus. Application quantity approx. 100 g/m^2 . No roller frame included.

ARTNO.	DESCRIPTION	
16233-000025	25 cm roller	12



Oil roller Microfibre 60-80

For the roller application of oils (LOBA oils and 2K Intensive). Applied quantity: 40-60 g/m². No roller frame included.

ARTNO.	DESCRIPTION	\Box
16236-100000	25 cm roller	12



Small roller for edges

Roller for edges and other hard-to-reach areas.

ARTNO.	DESCRIPTION	\Box
16237-000000	10 cm roller	10



Roller frame, roller extension

Roller frame: for finish rollers. Telescopic bar: roller extension. Can be extended up to 2.5 metres.

ARTNO.	DESCRIPTION	
16238-000000	Telescopic bar expandable 117-200 cm	10
16232-000000	Roller frame for 25 cm roller	20
16232-100000	Roller frame for 10 cm edge roller	20



Rollerbox 25 cm

Clean storage of rollers.

ARTNO.	DIMENSIONS	
16340-000000	25 cm	50



Oilbrush

Applicator for certain LOBA products for outdoor

ARTNO.	DIMENSIONS	
16081-000021	21 cm	1



Brush with long handleBrushes for corners, edges and other

hard-to-reach areas.


ARTNO.	DIMENSIONS	\Box
16239-000000	60 mm	12



Trowel

Applicator for filler products, oils, waxes, coloring systems and primers.

ARTNO.	DESCRIPTION	DIMENSIONS	
16083-0000	stainless steel	27 cm/35 cm	6



TrimPad applicator

Applicator for 2K Contact and WPC Refresh.

ARTNO.	DESCRIPTION	DIMENSIONS	
16274-000010	Spare TrimPad	25 cm	12
16275-000000	Telescopic bar TrimPad	-	10
16273-000010	TrimPad applicator	25 cm	12



Wischwiesel

Applicator with pad for water-based LOBA maintenance products. The LOBA applicator pad is a high-quality applicator head for the LOBA Wischwiesel.

ARTNO.	DESCRIPTION	DIMENSIONS	\Box
16247-000000	Applicator	140 cm	20
16249-000000	Applicator pad	44 cm	100

Range of Use – Rollers



	OIL ROLLER	FINISH ROLLER		
	Micro 60-80	Micro 100 - 120	Universal 100	Deluxe 120
	ARTNO. 16236-1	ARTNO. 16236	ARTNO. 16233	ARTNO. 16234
EasyPrime	-	✓	✓	-
VivaPrime	-	✓	✓	-
PrimaSeal Plus	-	-	✓	-
2K Intensive	✓	-	-	-
ProColor	✓*	-	-	-
FactoryBase	-	✓	✓	-
EasyFinish	-	✓	-	✓
Viva	_	✓	-	✓
Life	-	✓	-	✓
2K InvisibleProtect	-	-	-	✓
2K Supra A.T.	-	✓	-	✓
2K Duo	-	✓	-	✓
2K Fusion	-	✓	-	✓
2K UltraElastic	-	✓	-	✓
SportFinish	-	✓	-	✓
2K UltraSport	-	✓	-	✓
2K FactoryStyle	-	✓	-	-
Rush	-	-	✓	-
2K ImpactOil transparent	✓	-	-	-
PreTone	-	✓	-	_
Akzent 100 Oil	✓	-	-	_
HardwaxOil EcoPlus	✓	-	-	-
Markant / Hardwax0il	✓	-	-	-
Hardwax0il Nature	✓	-	-	-

^{✓ =} Can be used without restrictions - = Use not recommended * = Observe technical information



Cover 400 g

Protection covers with vapor diffusion capability made of recycled textiles (50%) and recycled paper (50%). Protection covers for newly finished or oiled hardwood floors.

ARTNO.	DESCRIPTION	DIMENSIONS	
16280-000000	Protection cover	W 100 cm, L 50 m	1



Dosing pump

Dosing pump for 10 L containers. The dosing cap extracts approx. 30 ml per push.

ARTNO.	DESCRIPTION	
16225-000000	Depth of immersion: approx. 28.5 cm - wreath: Ø 4.5 cm	25





Mixing container

Measuring cup with scale for the measurement of partial quantities of LOBA 2K water-based finish or LOBA 2K Intensive.

ARTNO.	DESCRIPTION	
16080	For 2K sealers filling quantity 1l or 2K Intensive filling quantity 1l	1



Paintmixer

For the fast and mechanical stirring of colors or the mixing-in of hardening components.

ARTNO.	DIMENSIONS	
16254-000000	ø 60, length 350 mm	10



Shoegaloshes

Made of fabric. 10 pairs in a clap pack. Absorbent and anti-slip. To be put on during final inspections, site inspections, oiling hardwood flooring, cleaning flooring, etc.

ARTNO.	\Box
16422-001196	10



Spray can

Simple application of cleaning and maintenance products.

ARTNO.	DESCRIPTION	
16310-000000	filling quantity 11	1



Coating bucket, bucket liner

Bucket with lid and measuring scale. PE liners for the coating bucket.

ARTNO.	DESCRIPTION	6
16099-000000	Bucket filling quantity 181	1
16218-000000	Bucket liner	25



Wiping cloth
Ideally suited to wipe up excess material after oil application. Highly absorbent cloth with long lifetime. The product can also be used for the product can be used for the product of the cleaning tools and machines. Material: 30 % cotton, 25 % viscose, 20 %

polypropylene, 15 % polyester and 10 % other

ARTNO.	DIMENSIONS	
16421-100000	50 x 60 cm	100



ThermohygrometerFor measuring ambient temperature and

relative humidity.

ARTNO.	6
16230-200000	1



Canister OpenerConvenient tool for opening LOBA canisters.
Especially helpful for opened canisters

ARTNO.	6
16219-000000	1







GapFiller

Acrylic-based resilient joint sealer repair compound.
• Very high filling capacity, low shrinkage

- Fast drying
- Very elasticSandable, colorable and recoatable with finishes, oils and care products

 • Solvent and odor free
- · High adhesion



White





ART.-NO.

16227-...



VARIANT

Various colors



310 ml



12

GISCODE

D1

Color samples are not binding

Walnut



Cork stripes

For installation between doorways or in edge

ARTNO.	DESCRIPTION	DIMENSIONS	
16043-290010	mocca	915 x 10 x 10 mm 915 x 10 x 14 mm 915 x 10 x 22 mm	80/60/36
16042-291510	nature	915 x 10 x 10 mm 915 x 10 x 14 mm 915 x 10 x 22 mm	80/60/36



RepairSet

Set with different colors. The solution for all smaller repairs of hardwood floors, multi-layer hardwood floor, laminate and cork flooring. Colors are mixable. Includes wedge scraper, hot knife and abrasive fabric.

ARTNO.	VARIANT	б
16351-000000	Various colors	1



Our stress levels at a glance


The new stress levels defined by LOBA help you find the perfect finish for the types of stress your project will be exposed to.

Our teams in the Application Technology and Research & Development departments continuously test LOBA products in order to ensure consistent quality and develop our products further on the basis of new requirements defined by our customers as well as laws and regulations. The tests are extremely comprehensive and examine numerous properties.

Four test categories were chosen that most strongly represent the overall resistance of the finishes:

- · Single scratch
- · Wear
- Abrasion
- · Chemical resistance

1K and 2K finishes are evaluated on the basis of laboratory values in the respective categories on a scale of 1 - 10, and a mean value is also calculated from this.







Calculation example using 2K Duo

As shown on the product

Explanation of symbols



EMI CODE® EC1 PLUS and EC1R PLUS

Very low emissions



Suitable for children's toys according to DIN EN 71-3



Connected Systems: System guar antee for LOBA sealing products and oils for Wakol adhesive and levelling compounds



Non-slip according to DIN 51097 evaluation group A



EMICODE® EC1 and EC1R: Very low emissions



construction product, Class M1



Emission-tested construction product according to French . VOC regulation



Non-slip according to DIN 51097 evaluation group B



EMICODE® EC2 and EC2R: Low emissions



Emissions-tested Construction product compliant with DIBt principles





Non-slip according to DIN 51130 evaluation group R9



Non-slip according to DIN 51130 evaluation group R10



Non-slip according to DIN 51130 evaluation group R11



Consumption in liters



Container size



Pallet unit



Consumption in grams



Packaging unit

GISCODE key



DGNB quality level for finishes and oils*

W1	Water-soluble surface treatment agents, solvent-free	4
W2+	Water-soluble surface treatment agents, solvent content up to 5%, N-methylpyrrolidone-free	4
W2/DD+	Water seal with hardener containing isocyanate, solvent content up to 5%, N-methylpyrrolidone-free	4
W3+	Water seal, solvent content up to 15%, N-methylpyrrolidone-free	2
W3/DD+	Water seal with hardener containing isocyanate, solvent content up to 15%, N-methylpyrrolidone-free	2
Ö10+	Oils/waxes, solvent-free, butanonoxime-free	4
Ö10/DD+	Oils/waxes, solvent-free, oxime-free, with hardener containing isocyanate	4
Ö20+	Oils/waxes, low-solvent, de-aromatized, oxime-free	2
Ö40+	Oils/waxes, contains solvents, de-aromatized, oxime-free	1
Ö40/DD+	Oils/waxes, contains solvents, de-aromatized, oxime-free, with hardener containing isocyanate	1
Ö60	Oils/waxes, containing high amounts of solvent (> 15%), de-aromatized	-
GE10	Emulsions / dispersions (contain surfactants)	
GE20	Emulsions / dispersions, contains solvents (5% - 15%)	
GGO	Basic cleaner, other	
GG10	Basic cleaner, solvent-free, not labelled	
GG60	Basic cleaner, irritant, contains solvents, with H-substances (aminoethanol, butyl glycol, ethanediol, N-methylpyrrolidone)	
GG80	Basic cleaner, caustic, contains solvents	
GU40	Maintenance cleaner, solvent-free (contains surfactants)	
GU50	Maintenance cleaner, contains solvents without H-substances	
GU70	Maintenance cleaner, solvent-free, irritant	
GU73	Maintenance cleaner, solvent-free, irritant (including severe eye damage)	
GU83	Maintenance cleaner, contains solvents, irritant (including severe eye damage)	
G1	Basic sealant and wood putty with high solvent content, de-aromatized and free of substances with a low boiling point (solvent content > 15%)	
G2	Basic sealant and wood putty with high solvent content, de-aromatized and containing substances with a low boiling point (solvent content >15%)	

^{*} The DGNB certification for sustainable buildings rates our products using the criterion ENV1.2 Local Environment Impact. Quality level 4 is the highest that can be achieved.

New website features

PRODUCT FILTER

Are you looking for the perfect product for a quote or a special range of use? Simply enter the filter criteria and find what you need!

CONSUMPTION CALCULATOR

Don't worry about the right order quantity – we'll take care of it. Enter the specifications and we'll tell you how much you need for your project!

INSPIRATION & APPLICATION

Are demanding customers or specific tenders posing a challenge for you? You'll find ideas and background information here.

REFERENCES

Are your customers looking for inspiration? You've come to the right place!
Let them browse through our references and collect ideas.

Upload your project pictures!





LOBA GmbH & Co. KG Leonberger Strasse 56-62 71254 Ditzingen Germany service@loba.de www.loba.de

Find your LOBA contact:





on organic oil.





